



kramer | zeevee™

# ZyPer4K

4K IP Video Distribution System

---

## User Manual

Updated July 2025



## Document symbol conventions:



Indicates an important piece of information affecting the operation of the unit.  
Retain this information.



Indicates a point of caution. Failure to heed this information may cause a hazard of some form to the operator or others in the field of operation.



Indicates a point regarding the electrical safety of the box. Failure to abide by the information presented may result in an electrical shock hazard to the operator or others in the field of operation.



Indicate a point affecting the RF performance of the box. Failure to heed or abide by the information presented may result in emissions or susceptibility that can affect the unit or nearby equipment. Performance conforming to the regulatory limit may be compromised or affected.

### About ZeeVee: (Acquired by Kramer in August 2024)

ZeeVee is the leading manufacturer of high-quality encoder/modulator/decoder products for video distribution over any type of transmission media; be it RF coax, fiber, or copper ethernet.

Established in 2007, ZeeVee has been manufacturing industry-leading products while operating the company responsibly in compliance with the strictest levels of regulatory and environmental requirements. The standards by which we govern our corporate conduct are far higher than that required by law.

Our mission is to completely fulfill the toughest customer application requirements with the highest quality products we can produce. After the sale, we strive to support the customer with award-winning support and service. Our goal is that no customer shall ever be dissatisfied. It is both our mission and our passion.

Kramer, Incorporated  
295 Foster Street, Suite 200  
Littleton, Massachusetts  
01460, USA

[www.zeevee.com](http://www.zeevee.com) and [www.kramerav.com](http://www.kramerav.com)  
[zv\\_support@kramerav.com](mailto:zv_support@kramerav.com)  
Phone: 1-877-493-3833

# CONTENTS

|  |    |
|--|----|
| System Description .....                             | 1  |
| System Elements .....                                | 2  |
| Encoder Function.....                                | 2  |
| Decoder Function.....                                | 4  |
| Management Platform.....                             | 6  |
| ZyPer Management Platform Hardware .....             | 7  |
| Detailed Interface Descriptions .....                | 8  |
| Encoder.....   | 8  |
| Enclosure variants.....                              | 8  |
| Common Ports .....                                   | 8  |
| Optional Ports - 10Gb Ethernet.....                  | 10 |
| Optional Ports - USB .....                           | 11 |
| Extended Input Options.....                          | 12 |
| XS Version Encoders .....                            | 19 |
| XSE Version Encoders.....                            | 22 |
| ZyPer4K-XS/XSE Encoder Reset Pin .....               | 26 |
| XR Version Encoders .....                            | 26 |
| ZyPer4K-XR Encoder Mounting Hole and Reset Pin ..... | 29 |
| Wallplate Encoder (US form factor-front) .....       | 30 |
| USB-C Cable Requirements .....                       | 31 |
| Wallplate Encoder (US form factor-back).....         | 31 |
| Wallplate Encoder (EU form factor-front) .....       | 34 |
| USB-C Cable Requirements .....                       | 35 |
| Wallplate Encoder (EU form factor-back).....         | 36 |
| Important USB-C information.....                     | 38 |
| USB-C Cable Requirements .....                       | 38 |
| Decoder .....  | 39 |
| Enclosure variants.....                              | 39 |
| Common Ports .....                                   | 39 |
| Optional Ports: 10Gb Ethernet.....                   | 41 |

|   |    |
|---|----|
| Optional Ports: USB .....                                   | 42 |
| Optional Ports: Display Port .....                          | 42 |
| Quiet/Fanless Decoder .....                                 | 43 |
| XS Version Decoders .....                                   | 44 |
| XSE Version Decoders.....                                   | 47 |
| ZyPer4K-XS/XSE Decoder Reset Pin.....                       | 53 |
| XR Version Decoders.....                                    | 54 |
| ZyPer4K-XR Decoder Mounting Hole and Reset Pin.....         | 57 |
| Wallplate Decoder (US form factor-front) .....              | 58 |
| Wallplate Decoder (US form factor-back) .....               | 59 |
| Wallplate Decoder (EU form factor-front) .....              | 61 |
| Wallplate Decoder (EU form factor-back).....                | 62 |
| Options.....  | 64 |
| Other Ports.....  | 64 |
| Setting Up ZyPer4K in a Point to Point Environment .....    | 66 |
| Dante Embedded Platform (DEP) .....                         | 67 |
| Dante Operation.....  | 69 |
| Dante API Commands.....                                     | 72 |
| Setting up ZyPer4K in Many to Many Environment .....        | 74 |
| Icron USB Details (Optional Feature most units) .....       | 77 |
| USB Details (Standard Feature XS/XSE/XR units).....         | 78 |
| ZyPer4K USB Interoperability .....                          | 78 |
| Important Note on ZyPer4K-XSE Decoders .....                | 79 |
| Technical Specifications .....                              | 80 |
| Encoder and Decoder HDMI Video Specifications.....          | 80 |
| Decoder DisplayPort Video Specifications.....               | 81 |
| Physical and Environmental.....                             | 83 |
| General Safety and Care Instructions .....                  | 84 |
| Safety.....   | 84 |
| Cleaning.....   | 86 |
| Encoder, Decoder and ZyPerMP Unit Cleaning Procedures ..... | 86 |

|  |     |
|--|-----|
| ZyPerMP Specific Cleaning Procedure .....            | 87  |
| Important Siting and Application Considerations..... | 88  |
| ZyPer4K Equipment Type and Uses.....                 | 88  |
| Installation Environment.....                        | 89  |
| Mounting Options .....                               | 89  |
| Mounting Brackets .....                              | 89  |
| VESA Mounting Bracket.....                           | 92  |
| Ventilation.....                                     | 94  |
| Water and moisture .....                             | 94  |
| AC Mains Connection .....                            | 95  |
| AC Power Cord .....                                  | 96  |
| Equipotential Referencing .....                      | 97  |
| Installer-Required Action .....                      | 97  |
| Responsibility and Stewardship .....                 | 99  |
| Reduction of Hazardous Substances (RoHS) .....       | 99  |
| Waste Electrical and Electronic Equipment .....      | 100 |
| FCC Compliance Statement .....                       | 101 |
| EMC Information .....                                | 102 |
| Electromagnetic Emissions.....                       | 102 |
| Electromagnetic Immunity.....                        | 103 |
| Physical Dimension Diagrams .....                    | 104 |
| Appendix 1 .....                                     | 110 |
| Known Good USB-C Cables .....                        | 110 |
| Appendix 2.....                                      | 111 |
| USB-C Charging.....                                  | 111 |
| USB-C Cable Requirements.....                        | 111 |
| Appendix 3 .....                                     | 112 |
| PoE Power and PoE Switches .....                     | 112 |
| Why Shielded Ethernet Cable Is Required.....         | 113 |
| Appendix 4 .....                                     | 115 |
| Accessories.....                                     | 115 |

|                            |     |
|----------------------------|-----|
| Appendix 5 .....           | 117 |
| ZyPer4K Part Numbers ..... | 117 |
| Disclaimers.....           | 123 |

# System Description


The ZyPer4K series of products from Kramer provide a means for transmitting and receiving up to 4K audio-visual information across a standard 10Gb IP network with outstanding quality at very low latencies.

**A minimal system consists of:**

- Video Source (Up to 4K)
- ZyPer4K Encoder device
- CatX Cable or Fiber cables with SFP modules
- ZyPer4K Decoder device
- Video sink (display device)

**A fully realized system consists of:**

- (N) Video Sources (HDMI 2.0 support with HDR)
- (N) ZyPer4K Encoder devices
- 10Gb Ethernet switching Infrastructure (> (N+M) ports of non-blocking capacity)
- (M) ZyPer4K Decoder devices
- (M) Video sink (display devices)
- ZyPerMP control node

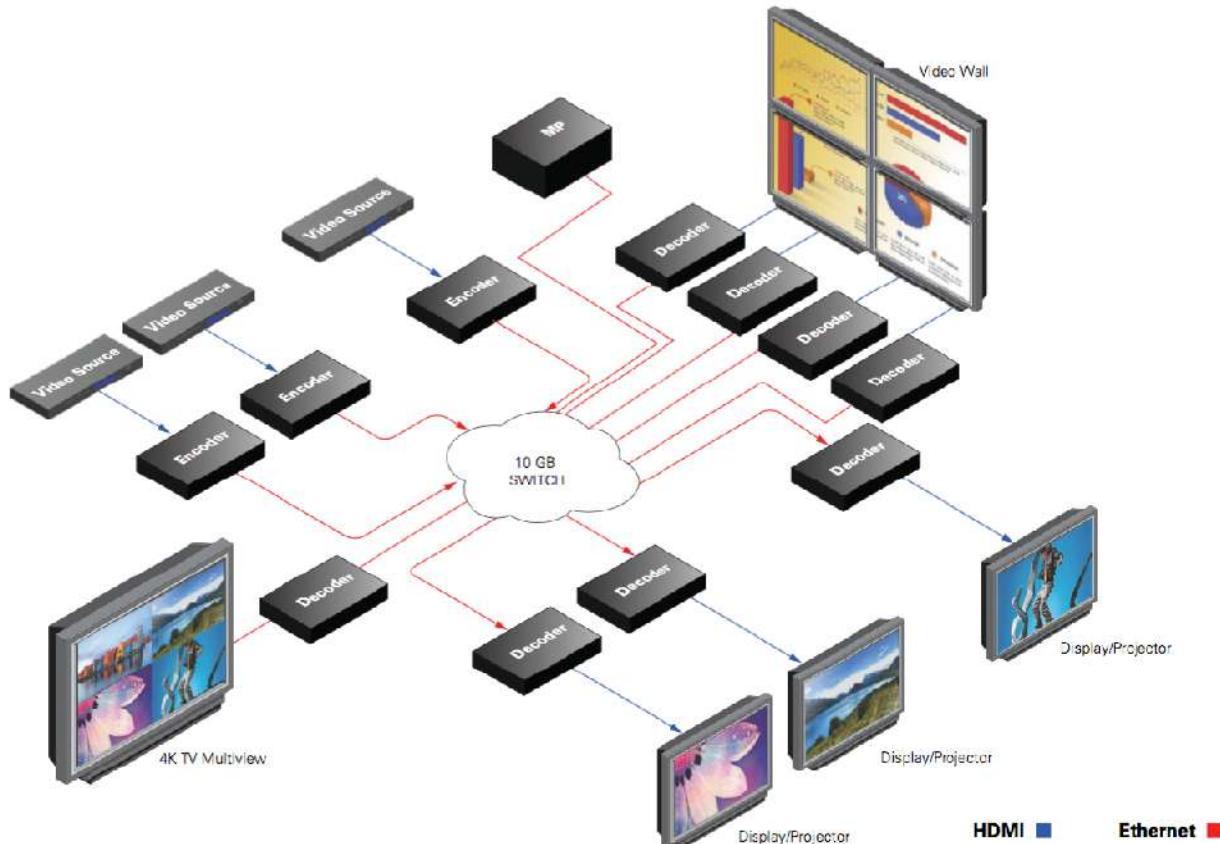

# System Elements

## Encoder Function

The function of the ZyPer4K Encoder Device (Encoder) is to accept audio and video data over a variety of interface types, and translate that data to a format suitable for transmission over a standard 10Gb Ethernet network.

Video data is segmented, encrypted, prepared for transmission, and sent by the Encoder unit. No unit other than those so designated by the control entity shall be able to receive the video stream sent by an Encoder.

The format of the IP data is fully in compliance with industry-standard IEEE 802.3 Ethernet networking practices. Any switch or device capable of passing 10G Ethernet traffic can be employed to carry ZyPer4K A/V traffic. (See *ZyPer4K Network Requirements and Security Considerations* document)

Other ports on the Encoder devices are for the carriage of USB, IR, RS232 and audio data as well as a 1Gbit/second utility port for general purpose connectivity of devices to the 10G bulk data infrastructure.

### Common Interfaces on all Encoders:

- Power Input (12VDC)
- RS232 Input/Output\*
- 1Gbit/sec Utility Ethernet Port
- Analog Audio Input
- Infrared Input and Output\*
- HDMI 2.0 Input

\* Not available on XS, XSE or XR models

### Ethernet Bulk Media Interface:

10Gb Fiber or 10Gb Copper

### Optional Interfaces on Encoder Units:

**Video:** USB-C (XSE & Wallplate Encoders only)

**USB:**  
(none) or  
USB Type-B Interface  
USB-C (Combo on XSE only)  
Mini USB Type-B (XS units only)

### Extended Media Input:

HDMI with loopback or  
12G-SDI or  
DisplayPort 1.2a or  
Analog (YPrPb/VGA/S-Video)

*In total there are 9 different, unique Encoder types that can be ordered.*

|                             |                                       |                            |                                      |             |
|-----------------------------|---------------------------------------|----------------------------|--------------------------------------|-------------|
| XSE Copper with USB-C input | XSE Copper with USB-C input and Dante | XSE Fiber with USB-C input | XSE Fiber with USB-C input and Dante | HDMI Copper |
|-----------------------------|---------------------------------------|----------------------------|--------------------------------------|-------------|

## ZyPer4K

|   |   |   |  |  |
|---|---|---|--|--|
| HDMI Copper with USB                    | HDMI Fiber  | HDMI Fiber with USB                               | Wallplate w/Icron USB (US form factor)     | 12G-SDI Fiber discontinued                       |
| 12G-SDI Fiber with USB discontinued     | 12G-SDI Copper discontinued                         | DisplayPort Fiber discontinued                    | Analog Fiber discontinued                  | Dual HDMI with Loopback Fiber discontinued       |
| 12G-SDI Copper w/USB discontinued       | DisplayPort Copper discontinued                     | DisplayPort Fiber w/USB discontinued              | Analog Fiber w/ USB discontinued           | Dual HDMI with Loopback Fiber w/USB discontinued |
| DisplayPort Copper w/USB discontinued   | Analog Copper with USB discontinued                 | Dual HDMI with Loopback Copper w/USB discontinued | Analog Copper discontinued                 | Dual HDMI with Loopback Copper discontinued      |
| XS Copper with USB discontinued         | XS Fiber with USB discontinued                      | XR Copper with USB discontinued                   | XR Fiber (multimode) with USB discontinued | XR Fiber (single mode) with USB discontinued     |
| Wallplate (US Form factor) discontinued | Wallplate w/Icron USB (EU form factor) discontinued | Wallplate (EU form factor) discontinued           |  |  |

**Note:** All ZyPer4K encoders are **TAA Compliant** except for the Wallplate unit.

## Decoder Function

The function of the ZyPer4K Decoder device (Decoder) is to accept 10G Ethernet traffic that represents the information to be decoded and displayed. When the appropriate IP stream is received the Decoder unit will first strip off the encryption that protects the payload on its transit across the network. It then reformats the video and audio information for display and plays it out its HDMI video output. Audio is also played out the appropriate port as included.

Other ports on the Decoder devices are for the carriage of USB, IR, RS232 and audio data as well as a 1Gbit/second utility port for general purpose connectivity of devices to the 10Gb bulk data infrastructure.

### Common Interfaces on all Decoders:

- Power Input (12VDC)
- RS232 Input/Output\*<sup>1</sup>
- 1Gbit/sec Utility Ethernet Port
- Analog Audio Output
- Infrared Input and Output\*<sup>2</sup>
- HDMI 2.0 Output

\*<sup>1</sup> Not available XS or XR models

\*<sup>2</sup> Not available on XS/XSE or XR models

### Optional Interfaces on Decoder Units:

#### DisplayPort

(none) or present

#### USB:

(none) or

2x USB Type-A Interface

1x USB Type-A Interface (XS and Rev1 XSE units)

### Ethernet Bulk Media Interface:

10Gb Fiber or 10Gb Copper

*In total there are 4 different, unique Decoder types that can be ordered.*

|   |  |  |   |
|---|--|--|---|
| XSE Copper with RS-232 and USB          | XSE Copper with RS-232, USB and Dante    | XSE Fiber with RS-232 and USB                            | XSE Fiber with RS-232, USB and Dante                    |
| HDMI Fiber discontinued                 | HDMI Fiber with USB discontinued         | HDMI Copper discontinued                                 | HDMI Copper with USB discontinued                       |
| DisplayPort Fiber discontinued          | DisplayPort Fiber with USB discontinued  | DisplayPort Copper discontinued                          | DisplayPort Copper with USB discontinued                |
| HDMI Fiber (Quiet/Fanless) discontinued | HDMI Copper (Quiet/Fanless) discontinued | HDMI Copper with USB and Dante Transmitter* discontinued | HDMI Fiber with USB and Dante Transmitter* discontinued |
| XS Copper with USB discontinued         | XS Fiber with USB discontinued           | XR Copper with USB discontinued                          | XR Fiber (multimode) with USB discontinued              |

## ZyPer4K

|  |  |   |  |
|--|--|---|--|
| XR Fiber (single mode)<br>with USB <b>discontinued</b> | Wallplate w/Icron USB<br>(US form factor)<br><b>discontinued</b> | Wallplate (US form<br>factor) <b>discontinued</b> |  |
|--|--|---|--|

**Note:** All ZyPer4K decoders are **TAA Compliant**

---

## Management Platform

---



Most installations will require a ZyPer Management Platform (ZyPerMP). This device controls the operation and manages the connectivity between endpoints. The management platform is a hardened controller node that must reside on the same logical network as the ZyPer4K Encoders and Decoders. It runs a ZeeVee application as its sole function. The application presents an API to potential third party management platforms as well as hosting its own management application.

In point-to-point applications every element is essential. The ZyPer4K Encoder and Decoder will detect this special case and self-configure appropriately.

Any installation beyond simple point-to-point link extension-like applications require a ZyPerMP.

The purpose of the Management Platform is to interface user operational requests into the specific device-level control needed to effect connectivity changes, screen management, interface management, and distribute software and control data to all the endpoints of the overall system. The ZyPerMP is the entity that insures all the endpoints, are accounted for, operating properly, and performing the correct operation at the correct time.

Further, the ZyPerMP is the element that guarantees security, manages access to the overall system and prevents rogue listeners or observers from snooping or spoofing unwanted content.

Multiple ZyPerMP devices may be deployed in a redundant configuration to provide for fault tolerant control of the greater ZyPer4K overall system.


Operation of the ZyPerMP, the Management application, and the ZyPer-API are beyond the scope of this manual and are documented separately in far greater detail in the *ZyPer Management Platform User Manual*. Documentation can be downloaded from the ZeeVee website.

<https://www.zeevee.com/documentation-all-products>



## ZyPer Management Platform Hardware

The ZyPer Management Platform (ZMP) is available from Kramer in two different hardware options. NUC and Rack Mount Server. Both versions have two network interfaces. It is important that the port labeled “Video Network” is connected to the LAN containing the ZyPer4K encoder/decoder endpoints. The port labeled “Management Network” is available to separate the Video AV Network from a corporate or Control Network.

**Rack Mount ProServer ZMP**

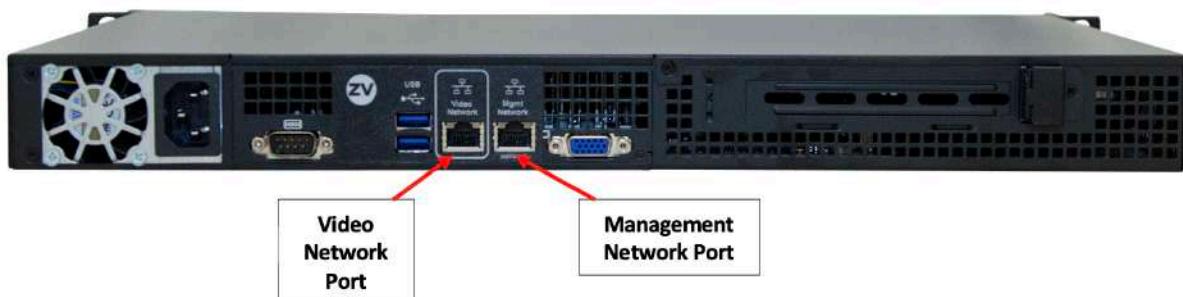

**NUC ZMP**

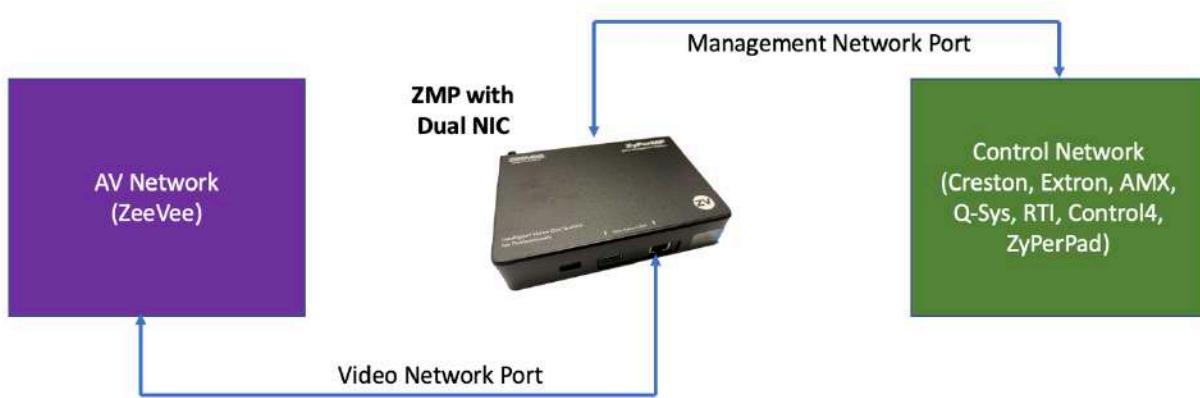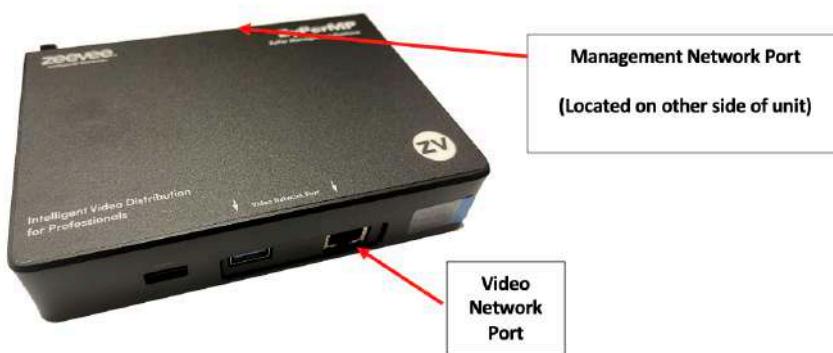

## Detailed Interface Descriptions

### Encoder

The function of the encoder is to accept raw video images, encode, encrypt and format them for transmission. There are several different variations based on the user's desired input, media type and interface description. The encoder supports inputs up to 4K resolution including full HDMI 2.0 support. (4K resolution 4:4:4 at 60Hz)

#### Enclosure variants

There are seven different sizes of the ZyPer4K Encoder unit enclosure.

| Input Function               | Box Size  |
|------------------------------|---|
| HDMI Input (White box)       | Base unit: 175mm Wide x 43mm High x 144mm Deep  |
| HDMI + Opt HDMI and Loop out | Extended unit: 227mm Wide x 43mm High x 144mm Deep  |
| HDMI + SDI Input             | Extended unit: 227mm Wide x 43mm High x 144mm Deep  |
| HDMI + DisplayPort Input     | Extended unit: 227mm Wide x 43mm High x 144mm Deep  |
| HDMI + Analog Video Input    | Extended unit: 227mm Wide x 43mm High x 144mm Deep  |
| HDMI Input (XS Version)      | 199mm Wide x 47mm High x 116mm Deep   |
| HDMI + USB-C (XSE Version)   | 199mm Wide x 48mm High x 136mm Deep   |
| HDMI Input (XR Version)      | 220mm Wide x 71mm High x 199mm Deep   |
| US form factor wallplate     | US 3-Gang size. 171.5mm Wide x 123.9mm High x 45.9mm Deep (Includes cover plate)                                |
| EU form factor wallplate     | EU Size. 222.5mm Wide x 86mm High x 45.9mm Deep (Includes cover plate) (UK cover plate available at added cost) |

The USB option does not affect the enclosure size.

The type of bulk media (10Gb Fiber or 10Gb Copper) does not affect the enclosure size.


#### Common Ports



The following ports are common to all non-wallplate encoders, regardless of the options or enclosure variant. (Except XS/XSE/XR units)

## ZyPer4K

| Port Name              | Index | Definition  |
|------------------------|-------|---|
| <b>Power</b>           | A     | 12VDC from supply. Center Post is + Ring is -   |
| <b>Utility Network</b> | B     | 10/100/1000Base-T Ethernet port. Used for general purpose device attachment to network. Traffic will be switched on to media network. |
| <b>Ground Lug</b>      | C     | For equipotential referencing of the box, this lug may be connected the environmental ground using a customer-supplied ground lead.   |



| Port Name         | Index | Definition  |
|-------------------|-------|---|
| <b>HDMI Input</b> | A     | HDMI 2.0 Input port. Capable of up to 4K60 with HDCP2.2 encryption. |



| Port Name          | Index | Definition  |
|--------------------|-------|---|
| <b>RS 232 Port</b> | A     | RS232 Control Port for sending and receiving side-band serial traffic to/from decoders as directed by ZyPer Management Platform (ZMP) |
| <b>LED PWR</b>     | B     | LED illuminated when unit is powered  |
| <b>LED VID</b>     | C     | LED Illuminated when active video is being processed  |

| Port Name     | Index | Definition   |
|---------------|-------|--|
| <b>Audio</b>  | D     | Audio Input/Output Jack. Input or Output of line-level stereo audio on 3.5mm jack. Direction of port configured by ZMP.  |
| <b>IR-OUT</b> | E     | Infrared commands information passed back FROM decoders as configured by ZMP. <b>Note:</b> Must user ZeeVee part number <b>Z4KIRTX</b>   |
| <b>IR-IN</b>  | F     | Infrared commands to be passed TO decoders as configured by ZMP. <b>Note:</b> Must use ZeeVee part number <b>Z4KIRRX</b>   |
| <b>RESET</b>  | G     | Reset to factory defaults. Disconnect power. Delete unit from ZMP GUI. Using a wire or paper clip, lightly press into this hole while powering on the unit. Hold for 15 seconds to reset the unit to factory defaults. |

### Optional Ports - 10Gb Ethernet

The customer may chose which type of Ethernet interface is appropriate for the application being addressed. Only one is present at a time and either is available regardless of the enclosure size.



| Port Name          | Index | Definition  |
|--------------------|-------|---|
| <b>10G Fiber</b>   | A1    | 10 Gigabit Ethernet Connection. Uses standard 10Gb pluggable devices SFP devices. |
| <b>10G Copper</b>  | A2    | 10Gb Ethernet over Cat6a (or better) cabling. RJ45                                |
| <b>TX Activity</b> | B     | Blue LED illuminates in synchrony with the transmission of 10Gb Ethernet data     |
| <b>RX Activity</b> | C     | Blue LED illuminates in synchrony with the receipt of 10Gb Ethernet data          |

## Optional Ports - USB

ZyPer4K Encoder units are available with or without a USB port.

**Note:** Information below does not pertain to XS/XSE/XR Encoder units.



| Port Name | Index | Definition  |
|-----------|-------|---|
| USB       | A     | USB 2.0 Type B port. Configuration and routing of USB handled by the ZMP configuration. Lower unit shown with no USB installed. |

### Important Note

The USB system requires its own IP Address that is different and independent from the IP Address of the ZyPer4K itself. Therefore a ZyPer4K unit with integrated USB needs two IP addresses. Customers that are using a DHCP server to generate IP Addresses must ensure the pool of available IP Addresses accounts these extra devices needing IP Addresses in the system.

If no DHCP server is available, the USB controller will assign itself a Link-Local address. However, if there is a DCHP server, but there are not enough addresses available in the pool, USB connections may fail.


There is no means of setting the USB controller with a Static IP address.

## Extended Input Options

All Encoder units contain a single HDMI 2.0 input port. Optionally, units may be ordered with an “extended” input. Units so ordered will reside in a somewhat larger enclosure.

Available interface types are shown:

(note: All input types are available with either 10Gb Fiber or 10Gb Copper Ethernet ports)

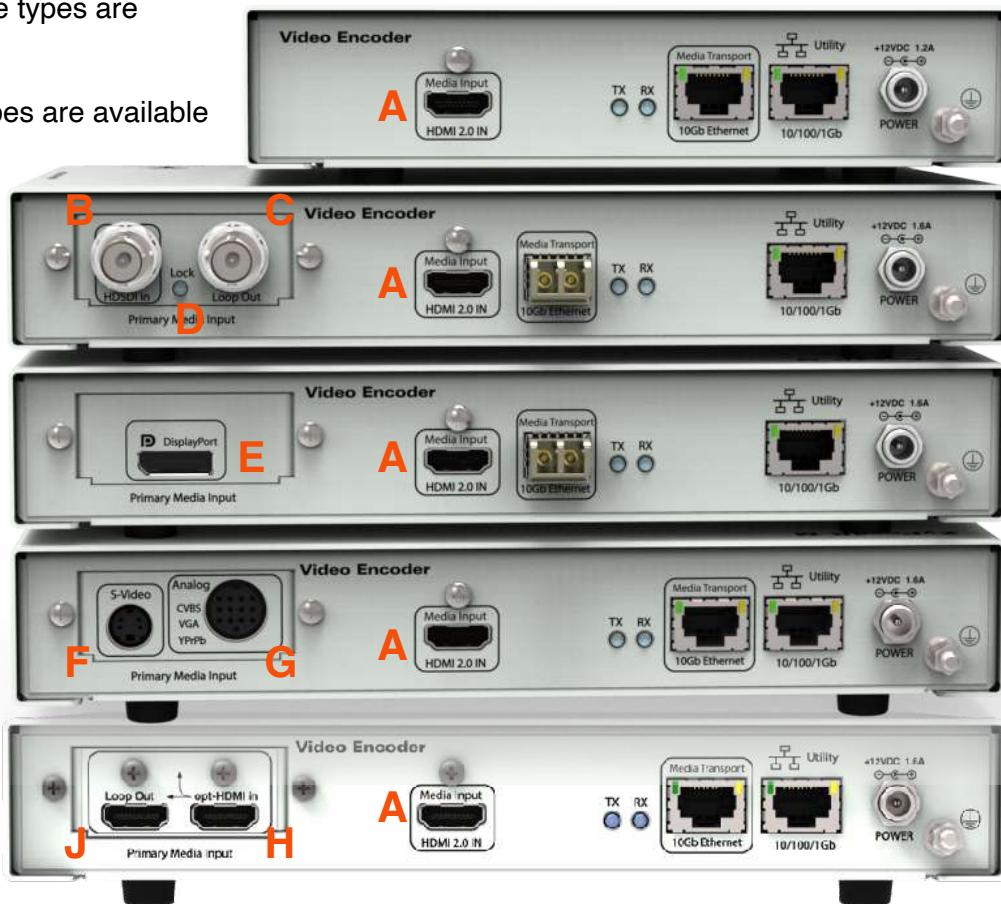


| Port Name        | Index | Definition  |
|------------------|-------|---|
| HDMI 2.0         | A     | All encoders contain an HDMI 2.0 port capable of up to 4KP60 4:4:4 with embedded audio and HDCP 2.2 encryption. |
| 12G-SDI Input    | B     | 12G-SDI Input supports up to 2160P60 w/up to 16-channels of embedded audio.                                     |
| 12G-SDI Loop     | C     | Copy of 12G-SDI Input port, retimed and re-amplified and presented for downstream devices.                      |
| LOCK LED         | D     | Blue LED illuminated when receiving valid SDI input   |
| DisplayPort 1.2a | E     | Standard DisplayPort 1.2a Input supporting up to 4K60 input rate with embedded audio.                           |
| S-Video          | F     | Standard S-Video video input. NTSC and PAL supported. Use STD cable.  |

| Port Name                      | Index | Definition   |
|--------------------------------|-------|--|
| <b>ZeeVee Hydra Connection</b> | G     | 13-Pin High density DIN connector allows for all signals related to Analog Video to be input. Types of Hydra Cable supported: <ul style="list-style-type: none"> <li>• Analog Video (YPrPb + S/PDIF + CVBS + LR Audio)</li> <li>• VGA Video (HD15 VGA input + LR Audio)</li> </ul> |
| <b>Optional HDMI 2.0 Input</b> | H     | Secondary or Optional HDMI port capable of up to 4KP60 4:4:4 with embedded audio and HDCP 2.2 encryption.  |
| <b>HDMI Loop Out</b>           | J     | Direct loop out of the Optional HDMI input. Index H above.<br><b>Note:</b> HDMI Input A cannot be directed to the Loop out port.   |

### Dual HDMI Input with Loop Out Option

The ZyPer4K Encoder may be purchased with the “Optional HDMI input with Loop-Out” pre-installed at the factory. **Note this product is discontinued.**

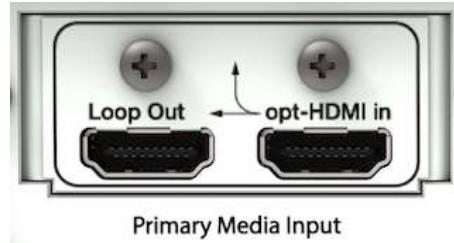

| Type                           | Parameter   |
|--------------------------------|---|
| Dual HDMI with Loop Out Option | Secondary or Optional HDMI port capable of up to 4KP60 4:4:4 with embedded audio and HDCP 2.2 encryption. |
| Direction                      | opt-HDMI in = Input, Loop Out = Output  |
| Resolutions                    | Same complete set of resolutions as supported by the resident HDMI module on the core Encoder unit.       |
| Audio                          | Up to 8-channels of LPCM audio can be received on the opt-HDMI interface.                                 |


#### Important Notes:

The ZyPer Management Platform (ZMP) is used to select what input is active for the Dual HDMI input encoder. The command is “set device videoPort”. The available options and results are:

*auto*: If only one input has a source connected, that input will be used as input for the encoder. If both inputs have sources connected, then the right HDMI input will be used as the active input for the encoder.

*hdm1*: If HDMI is selected then the right most HDMI input will be used as the source for the encoder.

*hdmiOptionalIn*: If HDMIOptionalIn is selected, the left HDMI port labeled “opt-HDMI-in” above the “Primary Media Input” label will be used as the source for the encoder.

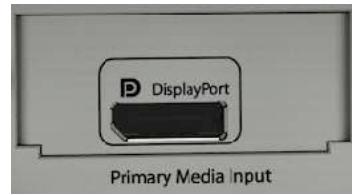

### DisplayPort Input Option

The ZyPer4K Encoder may be purchased with the “DisplayPort Input Option” pre-installed at the factory. **Note this product is discontinued.**

| Type               | Parameter   |
|--------------------|---|
| DisplayPort Option | Single DisplayPort receptacle support v1.2a of the DisplayPort standard.                            |
| Direction          | Input   |
| Resolutions        | Same complete set of resolutions as supported by the resident HDMI module on the core Encoder unit. |
| DRM                | HDCP 2.2 only (DPCP not supported)  |
| Audio              | Up to 8-channels of LPCM audio can be received on the DisplayPort interface.                        |

#### Important Notes:

The ZyPer Management Platform (ZMP) is used to select what input is active for the dual input encoder with DisplayPort option. The command is “set device videoPort”. The available options and results are:


*auto*: If only one input has a source connected, that input will be used as input for the encoder. If both inputs have sources connected, then the DisplayPort input will be used as the active input for the encoder.

*hdm1*: If HDMI is selected then HDMI input will be used as the source for the encoder.

*displayPort*: If display-port is selected, the DisplayPort input will be used as the source for the encoder.

**“12G-SDI” Option**

The ZyPer4K Encoder can be purchased with the commonly referred-to “12G-SDI Option”. **Note that the 3G-SDI Option has been discontinued as of mid 2023. 12G-SDI discontinued in mid 2025**

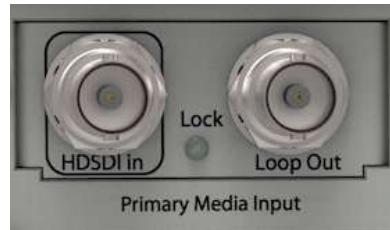

| Type           | Parameter   |
|----------------|---|
| 12G-SDI Option | Single Input port supporting the following standards: ST425-5, ST2081-11, ST2082-10 ( <b>Note</b> 3G-SDI Level B “Dual Link” is not supported)  |
| LoopThrough    | Retimed, re-amplified, direct-copy of the input signal provided on the “Loop” port for downstream chaining of the 12G-SDI input. ST2082-1 compatible.   |
| Data Rates     | 1.485Gb/s, 1.485/1.001Gb/s, 2.97Gb/s, 2.97/1.001Gb/s, 5.94Gb/s, 5.94/1.001Gb/s, 11.88Gb/s, and 11.88/1.001Gb/s  |
| Connectors     | 75-ohm BNC-type connector (input and output)  |
| Cable Lengths  | Canare L-5.5CUHD up to 75m. Belden 1694A up to 30m at 12G SDI. Both will work up to 100m at 3G SDI.   |
| Format         | Level-A<br><i>Level-B Dual Link Mapping (B-DL) is NOT supported</i><br><i>Dual Stream (B-DS) mapping is NOT supported.</i>  |
| Resolutions    | <ul style="list-style-type: none"> <li>• <b>12G</b> <ul style="list-style-type: none"> <li>○ 4096x2160 p 60/59.94/50</li> <li>○ 3840x2160 p 60/59.94/50</li> </ul> </li> <li>• <b>6G</b> <ul style="list-style-type: none"> <li>○ 4096x2160 p 30/29.97/25/24/23.98</li> <li>○ 3840x2160 p 30/29.97/25/24/23.98</li> </ul> </li> <li>• <b>3G</b> <ul style="list-style-type: none"> <li>○ 1920x1080 p 60/59.94/50</li> <li>○ 2048x1080 p 60/59.94/50</li> </ul> </li> <li>• <b>HD</b> <ul style="list-style-type: none"> <li>○ 2048x1080 p 30/29.97/25/24/23.98</li> <li>○ 1920x1080 p 30/29.97/25/24/23.98</li> <li>○ 1920x1080 i 60/59.94/50</li> <li>○ 1280x720 p 60/59.94/50/30/29.97/25</li> </ul> </li> </ul> <p>All using 4:2:2 subsampling</p> |
| Audio          | 16-channels of SMPTE299M audio<br>Note: Restricted to 2-channels in Genlock mode  |

**Important Notes:**

The ZyPer Management Platform (ZMP) is used to select what input is active for the dual input encoder with HD-SDI or 12G-SDI option. The command is “set device videoPort”. The available options and results are:


*hdmi*: If HDMI is selected then HDMI input will be used as the source for the encoder.

*hdsdi*: If HDSDI is selected, the HD-SDI input will be used as the source for the encoder.

*12gsdi*: If 12GSDI is selected, the 12G-SDI input will be used as the source for the encoder.

### Analog Option

The ZyPer4K Encoder can be purchased with the “Analog Input Option”. This provides for four different types of possible video input (only one input active at a given time). **Note this product is discontinued.**

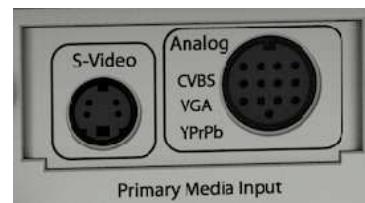

| Type                              | Parameter  |
|-----------------------------------|--|
| Analog Input Option               | 4 different types of Analog video input supported.   |
| S-Video                           | Standard 4-pin mini-DIN S-Video input<br>Supports 480i and 576i resolutions (NTSC and PAL)   |
| CVBS                              | <i>Composite Video. Standard RCA plug spawned from ZeeVee Hydra cable connected to 13-pin DIN connector.</i><br><i>Supports 480i and 576i resolutions (NTSC and PAL)</i>   |
| YPrPb                             | Standard Component Video input provided through Red, Green and Blue RCA connectors spawned by the ZeeVee Hydra Cable connected to the 13-Pin DIN connector.<br><br>640x480 (p/i)<br>720x576 (25Hz/50Hz)(p/i)<br>1280x720 (p/i)<br>1280x1024 (p)<br>1920x1080 (p/i)<br><br>all at 24/25/29.97/30/50/59.94/60Hz refresh rates except where noted       |
| VGA                               | A standard 15-Pin HD DSUB male VGA connector is provided through the use of the appropriate ZeeVee Hydra cable connected to the 13-PIN DIN connection on the rear pos the unit.<br><br>640x480 (p)<br>720x576 (p)<br>800x600 (p)<br>1024x768 (p)<br>1280x720 (p)<br>1280x1024 (p)<br>1366x768 (p)<br>1440x1080 (p)<br>1600x1200 (p)<br>1920x1080 (p) |
| Analog Audio (RCA-type DIN cable) | 2-channels of line-level L/R analog stereo input through the Red/White plug spawned by the appropriate ZeeVee Hydra cable connected to the 13-pin DIN jack.  |

| Type                              | Parameter  |
|-----------------------------------|--|
| Analog Audio (VGA-type DIN cable) | 2-channels of line-level L/R analog stereo input through 3.5mm plug spawned by the VGA version of the ZeeVee Hydra cable connected to the 13-Pin DIN jack.   |
| Digital Audio                     | When S/PDIF connection of the ZeeVee Hydra analog breakout cable is employed, received audio can be 2-channels of LPCM, or digitally encoded. If digitally encoded audio is received, it will be passed through unmodified through the Z4K system to the decoders (see HDMI Port specification). |

**Important Notes:**

The ZyPer Management Platform (ZMP) is used to select what input is active for the dual input encoder with Analog option. The command is “set device videoPort”. The available options and results are:

*hdmi*: If HDMI is selected then HDMI input will be used as the source for the encoder.

*component*: If Component is selected, the Analog input will be used as the source for the encoder. See Analog breakout cable below.

*composite*: If Composite is selected, the Analog input will be used as the source for the encoder. See Analog breakout cable below.

*vga*: If VGA is selected, the Analog input will be used as the source for the encoder. See VGA breakout cable below.

*s-video*: If S-Video is selected, the S-Video input will be used as the source for the encoder. Note that S-Video does not support audio.

Two different variants of the Hydra breakout cable may be purchased separately for use in the specific user application

### VGA BREAKOUT

- HD-15 supporting numerous resolutions up to 1900x1600
- Analog audio input carrying stereo L/R line-level audio for transport.



### Analog Breakout

Following connections supported:

- YPrPb - resolutions up to 1080P60
- CVBS - PAL and NTSC resolutions
- S/PDIF - digital audio input
- Analog L/R stereo line-level audio



When using the Analog breakout, only ONE of the input types (YPrPb or CVBS) may be active at a given time.

Similarly, only one type of audio input (S/PDIF or L/R Stereo) may be active at a given time.

---

### XS Version Encoders

XS version encoders provide a smaller footprint alternative as well as silent fanless operation. Note that XS version encoders and standard encoders/decoders are compatible with each other with the exception of a few features noted below:

- XS Version encoders do not support RS232 or IR ports.
- XS Version encoders do not support Preview Streams
- XS Version encoders do not support Multiview Text Overlay
- XS Version units USB function is not compatible with standard (White box) unit USB units.
- XS Version unit USB does not support cameras.



**Note:** Removing the rubber ring will void the warranty. The ring provides essential shock protection, unit spacing and is part of the seal that keeps foreign matter out of the unit.

## ZyPer4K XS Encoder (Copper)



| Port Name        | Index | Definition  |
|------------------|-------|---|
| Power            | A     | 12VDC from supply. Center Post is + Ring is -   |
| 10G Copper (PoE) | B     | 10Gb Ethernet over Cat6a (or better) cabling. RJ45. Supports PoE.<br><b>Important Note:</b> If using PoE with ZyPer4K units; the ZyPer4K must have a path to the ground. This grounding can be accomplished by using a shielded network cable (F/UTP). Please see Appendix 3 of this manual for additional information. |
| Utility Network  | C     | 10/100/1000Base-T Ethernet port. Used for general purpose device attachment to network. Traffic will be switched on to media network.   |
| Mini USB-B       | D     | Mini USB 2.0 Type B port. Configuration and routing of USB handled by the ZMP configuration. (Only compatible with other XS/XSE/XR units)   |
| Audio            | E     | Audio Input/Output Jack. Drives line-level stereo audio on 3.5mm jack.  |
| HDMI Input       | F     | HDMI 2.0 Input port. Capable of up to 4K60 with HDCP2.2 encryption.   |
| LED Status       | G     | LED illuminated when unit has a video input   |
| LED Power        | H     | LED illuminated when unit is powered  |



## ZyPer4K XS Encoder (Fiber)



| Port Name       | Index | Definition  |
|-----------------|-------|---|
| Power           | A     | 12VDC from supply. Center Post is + Ring is -   |
| 10G Fiber       | B     | 10 Gigabit Ethernet Connection. Uses standard 10Gb pluggable devices SFP devices.   |
| Utility Network | C     | 10/100/1000Base-T Ethernet port. Used for general purpose device attachment to network. Traffic will be switched on to media network.     |
| Mini USB-B      | D     | Mini USB 2.0 Type B port. Configuration and routing of USB handled by the ZMP configuration. (Only compatible with other XS/XSE/XR units) |
| Audio           | E     | Audio Input/Output Jack. Drives line-level stereo audio on 3.5mm jack.  |
| HDMI Input      | F     | HDMI 2.0 Input port. Capable of up to 4K60 with HDCP2.2 encryption.   |
| LED Status      | G     | LED illuminated when unit has a video input   |
| LED Power       | H     | LED illuminated when unit is powered  |



## XSE Version Encoders

XSE version encoders provide a smaller footprint alternative as well as silent fanless operation. Note that XSE version encoders and standard encoders/decoders are compatible with each other with the exception of a few features noted below:

- XSE Version encoders do not support RS232 or IR ports.
- XSE Version encoders do not support Preview Streams
- XSE Version encoders do not support Multiview Text Overlay
- XSE Version units USB function is not compatible with standard unit (White box) USB units. (Except if Icron module installed)
- XSE Version unit USB does not support cameras. (Except if Icron module installed)



**Note:** Removing the rubber ring will void the warranty. The ring provides essential shock protection, unit spacing and is part of the seal that keeps foreign matter out of the unit.


**ZyPer4K XSE Encoder (Copper)**  
**Note: Dante/Icron is optional feature**



| Port Name          | Index | Definition  |
|--------------------|-------|---|
| Power              | A     | 12VDC from supply. Center Post is + Ring is -   |
| 10G Copper (PoE)   | B     | 10Gb Ethernet over Cat6a (or better) cabling. RJ45. Supports PoE.<br><br><b>Important Note:</b> If using PoE with ZyPer4K units; the ZyPer4K must have a path to the ground. This grounding can be accomplished by using a shielded network cable (F/UTP). Please see Appendix 3 of this manual for additional information. |
| Utility Network    | C     | 10/100/1000Base-T Ethernet port. Used for general purpose device attachment to network. Traffic will be switched on to media network.   |
| HDMI LoopOut       | D     | HDMI 2.0 Output (Loopout) Will output active video stream from either HDMI input or the USB-C input.  |
| HDMI Input         | E     | HDMI 2.0 Input port. Capable of up to 4K60 with HDCP2.2 encryption.   |
| USB-C Input        | F     | Combination USB-C (Display-Port Alt Mode) and USB Host port..   |
| USB-C Charge Input | G     | Input power port to provide output charging feature to USB-C Media Input port. Maximum 60W with appropriate USB-C cables for charge port and Media Input port.  |
| Audio              | H     | Audio Input/Output Jack. Balanced 5-pin Phoenix.  |
| LED Status         | J     | LED illuminated when unit has a video input   |
| LED Power          | K     | LED illuminated when unit is powered  |



**ZyPer4K XSE Encoder (Fiber)**  
**Note: Dante/Icron is optional feature**

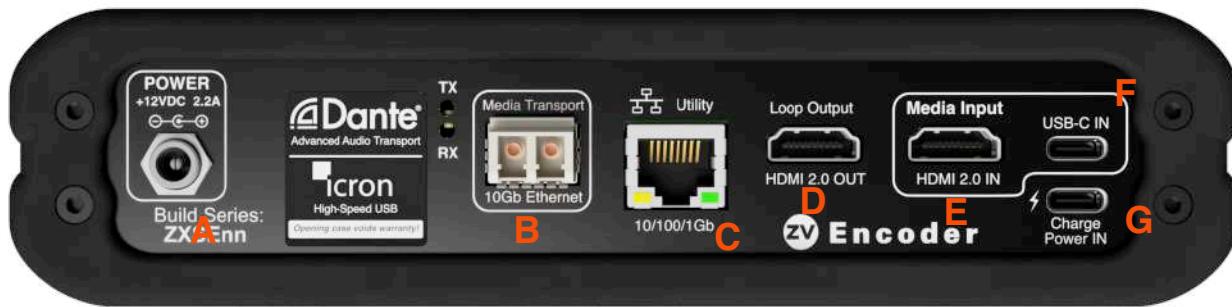

| Port Name          | Index | Definition   |
|--------------------|-------|--|
| Power              | A     | 12VDC from supply. Center Post is + Ring is -  |
| 10G Fiber          | B     | 10 Gigabit Ethernet Connection. Uses standard 10Gb pluggable devices. SFP devices.   |
| Utility Network    | C     | 10/100/1000Base-T Ethernet port. Used for general purpose device attachment to network. Traffic will be switched on to media network.                          |
| HDMI LoopOut       | D     | HDMI 2.0 Output (Loopout) Will output active video stream from either HDMI input or the USB-C input.   |
| HDMI Input         | E     | HDMI 2.0 Input port. Capable of up to 4K60 with HDCP2.2 encryption.  |
| USB-C Input        | F     | Combination USB-C (Display-Port Alt Mode) and USB Host port..  |
| USB-C Charge Input | G     | Input power port to provide output charging feature to USB-C Media Input port. Maximum 60W with appropriate USB-C cables for charge port and Media Input port. |
| Audio              | H     | Audio Input/Output Jack. Balanced 5-pin Phoenix.   |
| LED Status         | J     | LED illuminated when unit has a video input  |
| LED Power          | K     | LED illuminated when unit is powered   |



**Important Note (Optional Dante/Icron module for XSE encoder units)**

The Optional Dante/Icron USB system requires its own IP Address that is different and independent from the IP Address of the ZyPer4K-XSE itself. Therefore a ZyPer4K-XSE unit with Dante and Icron USB needs three IP addresses. Customers that are using a DHCP server to generate IP Addresses must ensure the pool of available IP Addresses accounts these extra devices needing IP Addresses in the system.

If no DHCP server is available, the USB controller and Dante controller will assign themselves a Link-Local address. However, if there is a DHCP server, but there are not enough addresses available in the pool, USB connections and Dante may fail.

There is no means of setting the USB controller or Dante controller with a Static IP address.

**Important Dante Note**

The Dante feature can be enabled on either the 10G LAN or on an independent 1G LAN using the Utility Port.

There is an API command to configure the desired LAN for Dante operation.

```
set device <deviceMAC | deviceName> utilityPort enabled | disabled | onlyDanteAudio
```

Options:

1. enabled: Sets Dante to the 10G LAN. Utility port is technically the same LAN
2. disabled: Dante is completely disabled. Not available on either port
3. onlyDanteAudio: Dante is on Utility port as a separate LAN

**ZyPer4K-XSE Encoder USB-C Charging Details**

| Does USB-C Cable have Emark chip? |            | Maximum Supported Power |
|-----------------------------------|------------|-------------------------|
| Video Port                        | Power Port |                         |
| No                                | Yes        | 60 Watts                |
| No                                | No         | 60 Watts                |
| Yes                               | Yes        | 60 Watts                |
| Yes                               | No         | 60 Watts                |

## ZyPer4K-XS/XSE Encoder Reset Pin

The hardware reset pin for the ZyPer4K-XS/XSE encoder is located on the side of the unit with the regulatory markings. (Note image below enhanced to better show the location of the reset pin hole. There is no white circle around the reset pin hole.)



| Port Name | Index | Definition   |
|-----------|-------|--|
| RESET     | A     | Reset to factory defaults. Disconnect power. Delete unit from ZMP GUI. Using a wire or paper clip, lightly press into this hole while powering on the unit. Hold for 15 seconds to reset the unit to factory defaults. |

## XR Version Encoders

XR version encoders provide a rugged enclosure with rugged connections options as well as silent fanless operation. Note that XR version encoders and standard encoders/decoders are compatible with each other with the exception of a few features noted below:

XR Version encoders do not support RS232 or IR ports.

XR Version encoders do not support Preview Streams

XR Version encoders do not support Multiview Text Overlay

XR Version units USB function is not compatible with standard (White box) USB units. (Is compatible with XS units)

XR Version unit USB does not support cameras.

**Note:** Removing the rubber ring will void the warranty. The ring provides essential shock protection, unit spacing and is part of the seal that keeps foreign matter out of the unit.

## ZyPer4K XR Encoder (Copper)



| Port Name        | Index | Definition  |
|------------------|-------|---|
| 10G Copper (PoE) | A     | 10Gb Ethernet over Cat6a (or better) cabling. RJ45. Supports PoE.<br><b>Important Note:</b> If using PoE with ZyPer4K units; the ZyPer4K must have a path to the ground. This grounding can be accomplished by using a shielded network cable (F/UTP). Please see Appendix 3 of this manual for additional information.   |
| Utility Network  | B     | 10/100/1000Base-T Ethernet port. (Neutrik NE8FDX-P6) Used for general purpose device attachment to network.   |
| Audio            | C     | Audio Input/Output Jack. (Switchcraft D3F-XLR) Drives line-level stereo audio.  |
| USB-B            | D     | USB 2.0 Type B port. (Switchcraft EHUSBBA) Configuration and routing of USB handled by the ZMP configuration. (Only compatible with other XR and XS/XSE units)  |
| HDMI Input       | E     | HDMI 2.0 Input port. (Switchcraft EHDMI2)   |
| Power            | F     | 120/220V AC Power input. Requires Neutrik NAC3FX-W-TOP connector.<br><b>Power cords do not ship with units.</b> Example Power below:<br><br><a href="https://www.fullcompass.com/prod/517787-blizzard-true-main-1406-powercon-true1-compatible-to-edison-cable-14awg-6?gad_source=1&amp;gclid=EA1aIQobChM1rlvqiNjbiAMVFTYIBR16UTWsEAQYASA BEgKyiPD_BwE">https://www.fullcompass.com/prod/517787-blizzard-true-main-1406-powercon-true1-compatible-to-edison-cable-14awg-6?gad_source=1&amp;gclid=EA1aIQobChM1rlvqiNjbiAMVFTYIBR16UTWsEAQYASA BEgKyiPD_BwE</a> |
| LED Status       | G     | LED illuminated when unit has a video input   |
| LED Power        | H     | LED illuminated when unit is powered  |



## ZyPer4K XR Encoder (Fiber)

Fiber Gasket



| Port Name       | Index | Definition   |
|-----------------|-------|--|
| 10G Fiber       | A     | 10Gb Ethernet over Fiber. LC connector. (Neutrik N02-4FDW-1-A) Multimode or Single mode. SFP module integrated into the unit. (MMF Gasket = Black, SMF Gasket = Yellow) <b>Note: MMF supports 50um fiber cable only</b>  |
| Utility Network | B     | 10/100/1000Base-T Ethernet port. (Neutrik NE8FDX-P6) Used for general purpose device attachment to network.  |
| Audio           | C     | Audio Input/Output Jack. (Switchcraft D3F-XLR) Drives line-level stereo audio. Pin 1 = Audio Return, Pin 2 = Right Channel, Pin 3 = Left Channel   |
| USB-B           | D     | USB 2.0 Type B port. (Switchcraft EHUSBBA) Configuration and routing of USB handled by the ZMP configuration. (Only compatible with other XR and XS/XSE units)   |
| HDMI Input      | E     | HDMI 2.0 Input port. (Switchcraft EHDMI2)  |
| Power           | F     | 120/220V AC Power input. Requires Neutrik NAC3FX-W-TOP connector. <b>Power cords do not ship with units.</b> Example Power below:<br><br><a href="https://www.fullcompass.com/prod/517787-blizzard-true-main-1406-powercon-true1-compatible-to-edison-cable-14awg-6?gad_source=1&amp;gclid=EA1a1QobChM1rlvqiNjbiAMVFTYIBR16UTWsEAQYASA">https://www.fullcompass.com/prod/517787-blizzard-true-main-1406-powercon-true1-compatible-to-edison-cable-14awg-6?gad_source=1&amp;gclid=EA1a1QobChM1rlvqiNjbiAMVFTYIBR16UTWsEAQYASA</a><br>BEgKyiPD_BwE |
| LED Status      | G     | LED illuminated when unit has a video input  |
| LED Power       | H     | LED illuminated when unit is powered   |



## ZyPer4K-XR Encoder Mounting Hole and Reset Pin

The hardware reset pin for the ZyPer4K-XR encoder is located on the side of the unit with the Stage-Clamp Mount Point. (Note image below enhanced to better show the location of the reset pin hole. There is no white dot to mark the reset pin hole.)

The ZyPer4K-XR encoder has a mounting hold for standard Truss Clamps. Thread is M10x1.5mm (course) with a maximum thread depth of 28mm.




| Port Name         | Index | Definition   |
|-------------------|-------|--|
| <b>RESET</b>      | A     | Reset to factory defaults. Disconnect power. Delete unit from ZMP GUI. Using a wire or paper clip, lightly press into this hole while powering on the unit. Hold for 15 seconds to reset the unit to factory defaults. |
| <b>Mount Hole</b> | B     | Stage-Clamp Mount Point. Thread M10x1.5mm (course). Max thread depth 28mm.   |

### Important Notes about mounting:

When using a Stage/Truss clamp there is a requirement that the ZyPer4K-XR unit be "hung" from the bolt or "perched" on the bolt. The center of mass for the unit shall be directly above or directly downward from the bolt. Either upward or downward mounting is acceptable providing that the axis of the bolt shall be vertical.

If the axis of the bolt is not vertical, the side plate of the ZyPer-XR units can be torqued and stressed to the level that could cause permanent deformation or damage to the unit. Example accepted orientations are shown below:

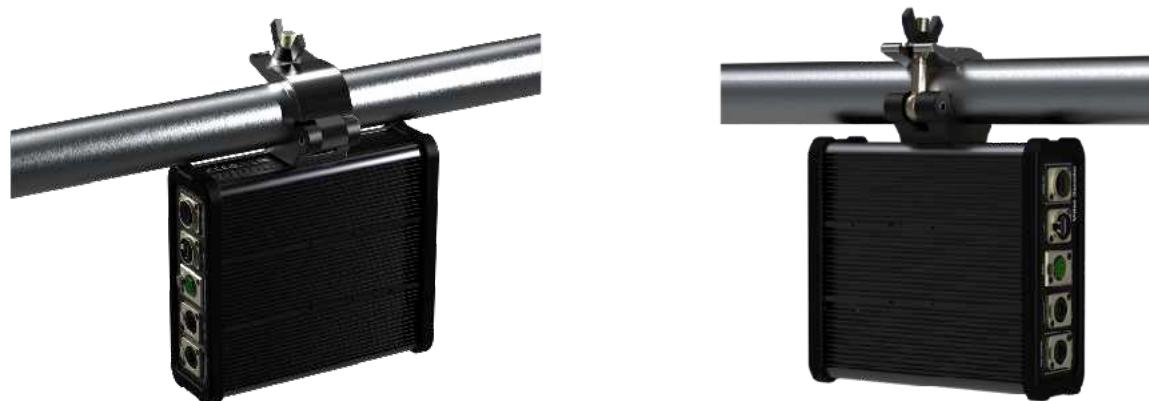

## Wallplate Encoder (US form factor-front)



| Port Name       | Index | Definition   |
|-----------------|-------|--|
| Utility Network | A     | 10/100/1000Base-T Ethernet port. Used for general purpose device attachment to network.  |
| Audio           | B     | Audio Input/Output Jack. Drives line-level stereo audio.   |
| USB-B           | C     | USB 2.0 Type B port. Configuration and routing of USB handled by the ZMP configuration. (Compatible with ZyPer4K (White box) units if Icron included. Compatible with XS/XR units if Icron not included) Always compatible with XSE units. |
| HDMI Input      | D     | HDMI 2.0 Input port.   |
| USB-C Input     | E     | Full featured USB-C DisplayPort port (DP-Alt Mode) supporting both Video and USB Host functionality. Can support device charging only if 24V source connected to unit. Cannot charge if Z4K using PoE power only.                          |
| LED Status      | F     | LED illuminated when unit has a video input on HDMI or USB-C input   |
| LED Power       | G     | LED illuminated when unit is powered   |
| IR-OUT          | H     | Infrared commands information passed back FROM decoders as configured by ZMP. <b>Note:</b> Must use IR emitter shipped in box with unit.   |
| IR-IN           | J     | Infrared commands to be passed TO decoders as configured by ZMP. <b>Note:</b> Must use IR receiver shipped in box with unit.   |
| RS 232 Port     | K     | RS232 Control Port for sending and receiving side-band serial traffic to/from decoders as directed by ZyPer Management Platform (ZMP)  |
| Video Select    | L     | Button to select between HDMI and USB-C video inputs when both are connected at same time  |

| Port Name | Index | Definition  |
|-----------|-------|---|
| Reset     | M     | Reset to factory defaults. Disconnect power. Delete unit from ZMP GUI. Using a wire or paper clip, lightly press into this hole while powering on the unit. Hold for 15 seconds to reset the unit to factory defaults.(Note reset hole highlighted in drawing above. Hole is located under the cover plate) |

### Important USB-C information:

To ensure proper operation when using the USB-C input for video and/or USB-Host function and/or USB charging the USB-C cable must meet certain requirements.

---

### USB-C Cable Requirements

1. Cable should be as short as possible
2. Must have USB-IF certification
3. Must be USB 3.2 Gen2 (2x1 or 2x2)
4. Current rating of 5A
5. Must support USB power delivery of 100W, 20V/5A
6. Data specs must be 20Gbps per lane (4K@60Hz) or above. (40Gbps cable)
7. USB Data specs must be 5Gbps (USB 3.0)
8. Must have built in E-Mark IC

Please see Appendix 1 near the end of this document for a list of known good USB-C cables.

**ZeeVee is not responsible for damage to any equipment caused by poor or incorrect USB-C cables.**

---

### Wallplate Encoder (US form factor-back)



| Port Name               | Index | Definition  |
|-------------------------|-------|---|
| <b>Power</b>            | A     | 24V DC Power. Phoenix connector.<br><b>Note:</b> Power supply does not ship with unit. Recommend to use PoE power.  |
| <b>10G Copper (PoE)</b> | B     | 10Gb Ethernet over Cat6a (or better) cabling. RJ45. Supports PoE.<br><b>Important Note:</b> If using PoE with ZyPer4K units; the ZyPer4K must have a path to the ground. This grounding can be accomplished by using a shielded network cable (F/UTP). Please see Appendix 3 of this manual for additional information. |

### Note on PoE Power:

It is important to remember that the ZyPer4K wallplate is a device that requires a 10Gb network. Therefore any PoE injector must also support 10Gb data transfer.

ZeeVee recommends the following 10G PoE Injector for use with the ZyPer4K wallplate and ZyPer4K-XS/XSE copper units.

*Proset PT-PSE104GB-60-10*

To support PoE the following minimum Ethernet cable requirements must be met.

- Must be Cat6a 23AWG Solid Copper Twisted Pair.
- **Must be shielded**
- Maximum Length 328ft (100m)
- DC Loop Resistance per Pair  $< 25\Omega$
- DC Resistance Unbalance per Pair 3% or  $< 200m\Omega$

### Important Notes

If using a Network Switch to provide PoE power to the ZyPer4K devices, it is important that the switch itself be protected against electrical surges that could be caused by something like a lightning strike. An appropriate surge protector should be placed between the Network Switch and AC power source.

### Switching Inputs

The Video Select button can be used to manually change inputs. Otherwise input will act as follows:

Connected = Active source

- Both HDMI and USB-C disconnected – no link
- USBC disconnected, HDMI is connected – Wall Plate HDMI is connected
- HDMI disconnected; USB-C is connected – Wall Plate connects USB-C

Cable state changes

- HDMI connected; USB not connected but USB-C is then connected – Video remains HDMI
- USB-C is connected; HDMI is not connected but HDMI is then connected- Video changes to HDMI
- Any cable pulls at this point the video will fail over to the other active source.

## Wallplate Encoder (EU form factor-front)



| Port Name       | Index | Definition   |
|-----------------|-------|--|
| Utility Network | A     | 10/100/1000Base-T Ethernet port. Used for general purpose device attachment to network.  |
| Audio           | B     | Audio Input/Output Jack. Drives line-level stereo audio.   |
| USB-B           | C     | USB 2.0 Type B port. Configuration and routing of USB handled by the ZMP configuration. (Compatible with ZyPer4K units if Icron included. Compatible with XS/XR units if Icron not included) Always compatible with XSE units. |
| HDMI Input      | D     | HDMI 2.0 Input port.   |
| USB-C Input     | E     | Full featured USB-C DisplayPort port (DP-Alt Mode) supporting both Video and USB Host functionality. Can support device charging only if 24V source connected to unit. Cannot charge if Z4K using PoE power only.              |
| LED Status      | F     | LED illuminated when unit has a video input on HDMI or USB-C input   |
| LED Power       | G     | LED illuminated when unit is powered   |
| IR-OUT          | H     | Infrared commands information passed back FROM decoders as configured by ZMP. <b>Note:</b> Must use IR emitter shipped in box with unit.   |
| IR-IN           | J     | Infrared commands to be passed TO decoders as configured by ZMP. <b>Note:</b> Must use IR receiver shipped in box with unit.   |
| RS 232 Port     | K     | RS232 Control Port for sending and receiving side-band serial traffic to/from decoders as directed by ZyPer Management Platform (ZMP)  |
| Video Select    | L     | Button to select between HDMI and USB-C video inputs when both are connected at same time  |

| Port Name | Index | Definition   |
|-----------|-------|--|
| Reset     | M     | Reset to factory defaults. Disconnect power. Delete unit from ZMP GUI. Using a wire or paper clip, lightly press into this hole while powering on the unit. Hold for 15 seconds to reset the unit to factory defaults. (Note reset hole highlighted in drawing above. Hole is not red) |

### Important USB-C information:

To ensure proper operation when using the USB-C input for video and/or USB-Host function and/or USB charging the USB-C cable must meet certain requirements.

### USB-C Cable Requirements

1. Cable should be as short as possible
2. Must have USB-IF certification
3. Must be USB 3.2 Gen2 (2x1 or 2x2)
4. Current rating of 5A
5. Must support USB power delivery of 100W, 20V/5A
6. Data specs must be 20Gbps per lane (4K@60Hz) or above. (40Gbps cable)
7. USB Data specs must be 5Gbps (USB 3.0)
8. Must have built in E-Mark IC

Please see Appendix 1 near the end of this document for a list of known good USB-C cables.

**Kramer is not responsible for damage to any equipment caused by poor or incorrect USB-C cables.**



## Wallplate Encoder (EU form factor-back)

| Port Name        | Index | Definition  |
|------------------|-------|---|
| Power            | A     | 24V DC Power. Phoenix connector.<br><b>Note:</b> Power supply does not ship with unit. Recommend to use PoE power.  |
| 10G Copper (PoE) | B     | 10Gb Ethernet over Cat6a (or better) cabling. RJ45. Supports PoE.<br><b>Important Note:</b> If using PoE with ZyPer4K units; the ZyPer4K must have a path to the ground. This grounding can be accomplished by using a shielded network cable (F/UTP). Please see Appendix 3 of this manual for additional information. |

**Note on PoE Power:**

It is important to remember that the ZyPer4K wallplate is a device that requires a 10Gb network. Therefore any PoE injector must also support 10Gb data transfer.

ZeeVee recommends the following 10G PoE Injector for use with the ZyPer4K wallplate and ZyPer4K-XS copper units.

*Proctet PT-PSE104GB-60-10*

To support PoE the following minimum Ethernet cable requirements must be met.

- Must be Cat6a 23AWG Solid Copper Twisted Pair.
- **Must be shielded**
- Maximum Length 328ft (100m)
- DC Loop Resistance per Pair  $< 25\Omega$
- DC Resistance Unbalance per Pair 3% or  $< 200m\Omega$

**Important Note**

If using a Network Switch to provide PoE power to the ZyPer4K devices, it is important that the switch itself be protected against electrical surges that could be caused by something like a lightning strike. An appropriate surge protector should be placed between the Network Switch and AC power source.

**Switching Inputs**

The Video Select button can be used to manually change inputs. Otherwise input will act as follows:

Connected = Active source

- Both HDMI and USB-C disconnected – no link
- USBC disconnected, HDMI is connected – Wall Plate HDMI is connected
- HDMI disconnected; USB-C is connected – Wall Plate connects USB-C

Cable state changes

- HDMI connected; USB not connected but USB-C is then connected – Video remains HDMI
- USB-C is connected; HDMI is not connected but HDMI is then connected- Video changes to HDMI
- Any cable pulls at this point the video will fail over to the other active source.

---

## Important USB-C information

To ensure proper operation when using the USB-C input for video and/or USB-Host function and/or USB charging the USB-C cable must meet certain requirements.

---

### USB-C Cable Requirements

1. Cable should be as short as possible
2. Must have USB-IF certification
3. Must be USB 3.2 Gen2 (2x1 or 2x2)
4. Current rating of 5A
5. Must support USB power delivery of 100W, 20V/5A
6. Video Data specs must support 4K data at 60Hz (4K@60Hz 4:4:4)
7. Must have built in E-Mark IC

Please see Appendix 1 near the end of this document for a list of known good USB-C cables.

**Kramer is not responsible for damage to any equipment caused by poor or incorrect USB-C cables.**

---

## Decoder

The function of the ZyPer4K Decoder is to accept a 10Gb IP feed containing the video information to be displayed. It decrypts, decodes and formats the video and audio information for display on the attached viewing device. The decoder is capable of outputting any HDMI 2.0 resolution supplied by the encoder including full 4K, 4:4:4 at 60Hz. There are several different variations based on the user's desired media type and USB options.

---

### Enclosure variants

There are seven sizes of the ZyPer4K Decoder unit enclosure.

| Output Function             | Box Size  |
|-----------------------------|---|
| HDMI Output (White box)     | Base unit: 175mm Wide x 43mm High x 144mm Deep  |
| HDMI Output (Quiet/Fanless) | Base unit: 164mm Wide x 44mm High x 145mm Deep  |
| HDMI and DisplayPort Output | Base unit: 175mm Wide x 43mm High x 144mm Deep  |
| HDMI Output (XS Version)    | 199mm Wide x 47mm High x 116mm Deep   |
| HDMI Output (XSE Version)   | 199mm Wide x 48mm High x 136mm Deep   |
| HDMI Output (XR Version)    | 220mm Wide x 71mm High x 199mm Deep   |
| US form factor wallplate    | US 3-Gang size. 171.5mm Wide x 123.9mm High x 45.9mm Deep (Includes cover plate)                                |
| EU form factor wallplate    | EU Size. 222.5mm Wide x 86mm High x 45.9mm Deep (Includes cover plate) (UK cover plate available at added cost) |

---

### Common Ports



The following ports are common to all decoders, regardless of the interface options.

## ZyPer4K

| Port Name              | Index | Definition  |
|------------------------|-------|---|
| <b>Power</b>           | A     | 12VDC from supply at 1.2A (center +, ring-)   |
| <b>Utility Network</b> | B     | 10/100/1000Base-T Ethernet port. Used for general purpose device attachment to network. Traffic will be switched on to media network. |
| <b>Ground Lug</b>      | C     | For equipotential referencing of the box, this lug may be connected the environmental ground using a customer-supplied ground lead.   |



| Port Name          | Index | Definition  |
|--------------------|-------|---|
| <b>HDMI Output</b> | A     | HDMI 2.0 Output port. Capable of up to 4K60 4:4:4 with embedded audio and HDCP2.2 encryption. |



| Port Name          | Index | Definition   |
|--------------------|-------|--|
| <b>RS 232 Port</b> | A     | RS232 Control Port for sending and receiving side-band serial traffic to/from encoders as directed by ZyPer Management Platform. (ZMP) |
| <b>LED PWR</b>     | B     | LED illuminated when unit is powered   |
| <b>LED VID</b>     | C     | LED Illuminated when active video is being processed   |
| <b>Audio</b>       | D     | Audio Output Jack. Drives line-level stereo audio on 3.5mm jack.   |

| Port Name | Index | Definition   |
|-----------|-------|--|
| IR-OUT    | E     | Infrared Commands information passed FROM Encoders to Decoders as configured by ZMP. <b>Note:</b> Must user ZeeVee part number <b>Z4KIRTX</b>  |
| IR-IN     | F     | Infrared Commands to be passed TO Encoders as configured by ZMP. <b>Note:</b> Must user ZeeVee part number <b>Z4KIRRX</b>  |
| RESET     | G     | Reset to factory defaults. Disconnect power. Delete unit from ZMP GUI. Using a wire or paper clip, lightly press into this hole while powering on the unit. Hold for 15 seconds to reset the unit to factory defaults. |

---

### Optional Ports: 10Gb Ethernet



| Port Name  | Index | Definition  |
|------------|-------|---|
| 10G Fiber  | A1    | 10 Gigabit Ethernet Connection. Uses standard 10Gb SFP devices. |
| 10G Copper | A2    | 10Gb Ethernet over Cat6a or better cabling. RJ45                |

## Optional Ports: USB



The ZyPer4K Decoder device can be ordered with optional USB connectivity.

Shown to the left is a unit with the USB option (top) and without the USB option (bottom) installed. This is a build-time option and is not retrofittable to the product.

| Port Name | Index | Definition  |
|-----------|-------|---|
| USB       | A     | 2 ports of USB 2.0 Type-A connectivity. Either port may be used and both operate simultaneously. Each port may provide up to 0.5A of power output (5V). |

### Important Note

The USB system requires its own IP Address that is different and independent from the IP Address of the ZyPer4K itself. Therefore a ZyPer4K unit with integrated USB needs two IP addresses. Customers that are using a DHCP server to generate IP Addresses must ensure the pool of available IP Addresses accounts these extra devices needing IP Addresses in the system.

If no DHCP server is available, the USB controller will assign itself a Link-Local address. However, if there is a DHCP server, but there are not enough addresses available in the pool, USB connections may fail.

There is no means of setting the USB controller with a Static IP address.

## Optional Ports: Display Port



The ZyPer4K Decoder device can be ordered with an optional DisplayPort output.

**Note:** DisplayPort output port does not support any Audio capabilities.

## Quiet/Fanless Decoder

The Quiet/Fanless decoder is available with either Copper or Fiber connectivity. Note that USB is not available with this version of hardware. (Note this product is discontinued)



| Port Name       | Index | Definition  |
|-----------------|-------|---|
| HDMI Output     | A     | HDMI 2.0 Output port. Capable of up to 4K60 4:4:4 with embedded audio and HDCP2.2 encryption.   |
| 10Gb Ethernet   | B     | 10Gb Ethernet over Cat6a or better cabling. RJ45  |
| Utility Network | C     | 10/100/1000Base-T Ethernet port. Used for general purpose device attachment to network. Traffic will be switched on to media network. |
| Power           | D     | 12VDC from supply at 1.2A (center +, ring-)   |



| Port Name   | Index | Definition   |
|-------------|-------|--|
| RS 232 Port | A     | RS232 Control Port for sending and receiving side-band serial traffic to/from encoders as directed by ZyPer Management Platform. (ZMP)   |
| LED PWR     | B     | LED illuminated when unit is powered   |
| LED VID     | C     | LED Illuminated when active video is being processed   |
| Audio       | D     | Audio Output Jack. Drives line-level stereo audio on 3.5mm jack.   |
| IR-OUT      | E     | Infrared Commands information passed FROM Encoders to Decoders as configured by ZMP.   |
| IR-IN       | F     | Infrared Commands to be passed TO Encoders as configured by ZMP.   |
| RESET       | G     | Reset to factory defaults. Disconnect power. Delete unit from ZMP GUI. Using a wire or paper clip, lightly press into this hole while powering on the unit. Hold for 15 seconds to reset the unit to factory defaults. |

**Note:** The preferred orientation of the fanless decoder is vertical with at least 1.5 inches of clearance around all sides.

---

## XS Version Decoders

XS version decoders provide a smaller footprint alternative as well as silent fanless operation. Note that XS version decoders and standard encoders/decoders are compatible with each other with the exception of a few features noted below:

XS Version decoders do not support IR ports.  
 XS Version decoders do not support RS232 ports.  
 XS Version decoders do not support Preview Streams  
 XS Version decoders do not support Multiview Text Overlay  
 XS Version units USB function is not compatible with standard (White box) USB units.  
 XS Version unit USB does not support cameras.

**Note:** Removing the rubber ring will void the warranty. The ring provides essential shock protection, unit spacing and is part of the seal that keeps foreign matter out of the unit.

## ZyPer4K-XS Decoder (Copper)



| Port Name        | Index | Definition  |
|------------------|-------|---|
| Power            | A     | 12VDC from supply. Center Post is + Ring is -   |
| 10G Copper (PoE) | B     | 10Gb Ethernet over Cat6a (or better) cabling. RJ45. Supports PoE.<br><b>Important Note:</b> If using PoE with ZyPer4K units; the ZyPer4K must have a path to the ground. This grounding can be accomplished by using a shielded network cable (F/UTP) or the connected HDMI display is grounded. (i.e. A 3-prong power connector on display) Please see Appendix 3 of this manual for additional information. |
| Utility Network  | C     | 10/100/1000Base-T Ethernet port. Used for general purpose device attachment to network. Traffic will be switched on to media network.   |
| USB-A            | D     | USB 2.0 Type A port. Configuration and routing of USB handled by the ZMP configuration. (Only compatible with other XS/XSE/XR units) Provides up to 0.5A of power (5V)  |
| Audio            | E     | Audio Output Jack. Drives line-level stereo audio on 3.5mm jack.  |
| HDMI Output      | F     | HDMI 2.0 Output port. Capable of up to 4K60 with HDCP2.2 encryption.  |
| LED Status       | G     | LED illuminated when unit has a video input   |
| LED Power        | H     | LED illuminated when unit is powered  |



## ZyPer4K-XS Decoder (Fiber)



| Port Name       | Index | Definition   |
|-----------------|-------|--|
| Power           | A     | 12VDC from supply. Center Post is + Ring is -  |
| 10G Fiber       | B     | 10 Gigabit Ethernet Connection. Uses standard 10Gb pluggable devices SFP devices.  |
| Utility Network | C     | 10/100/1000Base-T Ethernet port. Used for general purpose device attachment to network. Traffic will be switched on to media network.                                  |
| USB-A           | D     | USB 2.0 Type A port. Configuration and routing of USB handled by the ZMP configuration. (Only compatible with other XS/XSE/XR units) Provides up to 0.5A of power (5V) |
| Audio           | E     | Audio Output Jack. Drives line-level stereo audio on 3.5mm jack.   |
| HDMI Output     | F     | HDMI 2.0 Output port. Capable of up to 4K60 with HDCP2.2 encryption.   |
| LED Status      | G     | LED illuminated when unit has a video input  |
| LED Power       | H     | LED illuminated when unit is powered   |



---

## XSE Version Decoders

XSE version decoders provide a smaller footprint alternative as well as silent fanless operation. Note that XSE version decoders and standard encoders/decoders are compatible with each other with the exception of a few features noted below:

XSE Version decoders do not support IR ports.

XSE Version decoders do not support Preview Streams

XSE Version decoders do not support Multiview Text Overlay

XSE Version units USB function is not compatible with standard (White box) USB units. (Except if Icron module installed)

XSE Version unit USB does not support cameras.(Except if Icron module installed)

**Note:** Removing the rubber ring will void the warranty. The ring provides essential shock protection, unit spacing and is part of the seal that keeps foreign matter out of the unit.

**ZyPer4K-XSE Decoder Rev 1 (Copper)**  
**Note: Dante/Icron is Optional Feature**



| Port Name        | Index | Definition  |
|------------------|-------|---|
| Power            | A     | 12VDC from supply. Center Post is + Ring is -   |
| 10G Copper (PoE) | B     | 10Gb Ethernet over Cat6a (or better) cabling. RJ45. Supports PoE.<br><br><b>Important Note:</b> If using PoE with ZyPer4K units; the ZyPer4K must have a path to the ground. This grounding can be accomplished by using a shielded network cable (F/UTP) or the connected HDMI display is grounded. (i.e. A 3-prong power connector on display) Please see Appendix 3 of this manual for additional information. |
| Utility Network  | C     | 10/100/1000Base-T Ethernet port. Used for general purpose device attachment to network. Traffic will be switched on to media network.   |
| USB-A            | D     | USB 2.0 Type A port. Configuration and routing of USB handled by the ZMP configuration. Provides up to 0.5A of power (5V). <b>Note:</b> Rev2 of this unit will have 2 USB-A ports.  |
| RS-232           | E     | RS232 Control Port for sending and receiving side-band serial traffic to/from decoders as directed by ZyPer Management Platform.  |
| HDMI Output      | F     | HDMI 2.0 Output port. Capable of up to 4K60 with HDCP2.2 encryption.  |
| Audio Output     | G     | Balanced Audio Output. 5-pin Phoenix.   |
| LED Status       | H     | LED illuminated when unit has a video input   |
| LED Power        | J     | LED illuminated when unit is powered  |



**ZyPer4K-XSE Decoder Rev 1 (Fiber)**  
**Note: Dante/Icron is Optional Feature**



| Port Name       | Index | Definition   |
|-----------------|-------|--|
| Power           | A     | 12VDC from supply. Center Post is + Ring is -  |
| 10G Fiber       | B     | 10 Gigabit Ethernet Connection. Uses standard 10Gb pluggable devices SFP devices.  |
| Utility Network | C     | 10/100/1000Base-T Ethernet port. Used for general purpose device attachment to network. Traffic will be switched on to media network.  |
| USB-A           | D     | USB 2.0 Type A port. Configuration and routing of USB handled by the ZMP configuration. Provides up to 0.5A of power (5V). <b>Note: Rev2 of this unit will have 2 USB-A ports.</b> |
| RS-232          | E     | RS232 Control Port for sending and receiving side-band serial traffic to/from decoders as directed by ZyPer Management Platform.   |
| HDMI Output     | F     | HDMI 2.0 Output port. Capable of up to 4K60 with HDCP2.2 encryption.   |
| Audio Output    | G     | Balanced Audio Output. 5-pin Phoenix.  |
| LED Status      | H     | LED illuminated when unit has a video input  |
| LED Power       | J     | LED illuminated when unit is powered   |



**ZyPer4K-XSE Decoder Rev 2 (Copper)**  
**Note: Dante/Icron is Optional Feature**



| Port Name        | Index | Definition  |
|------------------|-------|---|
| Power            | A     | 12VDC from supply. Center Post is + Ring is -   |
| 10G Copper (PoE) | B     | 10Gb Ethernet over Cat6a (or better) cabling. RJ45. Supports PoE.<br><br><b>Important Note:</b> If using PoE with ZyPer4K units; the ZyPer4K must have a path to the ground. This grounding can be accomplished by using a shielded network cable (F/UTP) or the connected HDMI display is grounded. (i.e. A 3-prong power connector on display) Please see Appendix 3 of this manual for additional information. |
| Utility Network  | C     | 10/100/1000Base-T Ethernet port. Used for general purpose device attachment to network. Traffic will be switched on to media network.   |
| USB-A            | D     | USB 2.0 Type A ports. Configuration and routing of USB handled by the ZMP configuration. Provides up to 0.5A of power (5V).   |
| RS-232           | E     | RS232 Control Port for sending and receiving side-band serial traffic to/from decoders as directed by ZyPer Management Platform.  |
| HDMI Output      | F     | HDMI 2.0 Output port. Capable of up to 4K60 with HDCP2.2 encryption.  |
| Audio Output     | G     | Balanced Audio Output. 5-pin Phoenix.   |
| LED Status       | H     | LED illuminated when unit has a video input   |
| LED Power        | J     | LED illuminated when unit is powered  |



**ZyPer4K-XSE Decoder Rev 2 (Fiber)**  
**Note: Dante/Icron is Optional Feature**



| Port Name              | Index | Definition  |
|------------------------|-------|---|
| <b>Power</b>           | A     | 12VDC from supply. Center Post is + Ring is -   |
| <b>10G Fiber</b>       | B     | 10 Gigabit Ethernet Connection. Uses standard 10Gb pluggable devices SFP devices.   |
| <b>Utility Network</b> | C     | 10/100/1000Base-T Ethernet port. Used for general purpose device attachment to network. Traffic will be switched on to media network. |
| <b>USB-A</b>           | D     | USB 2.0 Type A ports. Configuration and routing of USB handled by the ZMP configuration. Provides up to 0.5A of power (5V).           |
| <b>RS-232</b>          | E     | RS232 Control Port for sending and receiving side-band serial traffic to/from decoders as directed by ZyPer Management Platform.      |
| <b>HDMI Output</b>     | F     | HDMI 2.0 Output port. Capable of up to 4K60 with HDCP2.2 encryption.  |
| <b>Audio Output</b>    | G     | Balanced Audio Output. 5-pin Phoenix.   |
| <b>LED Status</b>      | H     | LED illuminated when unit has a video input   |
| <b>LED Power</b>       | J     | LED illuminated when unit is powered  |



### **Important Note (Optional Dante/Icron module for XSE decoder units)**

The Optional Dante/Icron USB system requires its own IP Address that is different and independent from the IP Address of the ZyPer4K-XSE itself. Therefore a ZyPer4K-XSE unit with Dante and Icron USB needs three IP addresses. Customers that are using a DHCP server to generate IP Addresses must ensure the pool of available IP Addresses accounts for these extra devices needing IP Addresses in the system.

If no DHCP server is available, the USB controller and Dante controller will assign themselves a Link-Local address. However, if there is a DHCP server, but there are not enough addresses available in the pool, USB connections and Dante may fail.

There is no means of setting the USB controller or Dante controller with a Static IP address.

### **Important Interoperability Note**

The Icron enabled XSE decoder (**Rev 1**) USB feature will only work with USB 2.0 devices connected to it. Decoder will not function with USB 1.0 or USB 1.1 devices. Devices such as keyboards and mice.

**Workaround:** Connect an external USB HUB to the ZyPer4K-XSE Decoder. This will allow any USB 1.0, 1.1 or 2.0 device to function properly. Kramer/ZeeVee added an internal USB hub in the Rev 2 of the ZyPer4K-XSE hardware. (**Note this updated unit is identified easily as it has 2 USB-A ports**)

**Note:** Connection of external USB HUB should only be done while the ZyPer4K unit is powered off. Do not hot plug USB HUB into ZyPer4K.

### **Important Dante Note**

The Dante feature can be enabled on either the 10G LAN or on an independent 1G LAN using the Utility Port.

There is an API command to configure the desired LAN for Dante operation.

```
set device <deviceMAC | deviceName> utilityPort enabled | disabled | onlyDanteAudio
```

Options:

1. enabled: Sets Dante to the 10G LAN. Utility port is technically the same LAN
2. disabled: Dante is completely disabled. Not available on either port
3. onlyDanteAudio: Dante is on Utility port as a separate LAN

## ZyPer4K-XS/XSE Decoder Reset Pin

The hardware reset pin for the ZyPer4K-XS/XSE decoder is located on the side of the unit with the regulatory markings. (Note image below enhanced to better show the location of the reset pin hole. There is no white circle around the reset pin hole.)



| Port Name | Index | Definition   |
|-----------|-------|--|
| RESET     | A     | Reset to factory defaults. Disconnect power. Delete unit from ZMP GUI. Using a wire or paper clip, lightly press into this hole while powering on the unit. Hold for 15 seconds to reset the unit to factory defaults. |

## XR Version Decoders

XR version decoders provide a rugged enclosure with rugged connections options as well as silent fanless operation. Note that XR version decoders and standard encoders/decoders are compatible with each other with the exception of a few features noted below:

XR Version decoders do not support RS232 or IR ports.

XR Version decoders do not support Preview Streams

XR Version decoders do not support Multiview Text Overlay

XR Version units USB function is not compatible with standard unit USB units. (Is compatible with XS units)

XR Version unit USB does not support cameras.

**Note:** Removing the rubber ring will void the warranty. The ring provides essential shock protection, unit spacing and is part of the seal that keeps foreign matter out of the unit.

## ZyPer4K XR Decoder (Copper)



| Port Name        | Index | Definition  |
|------------------|-------|---|
| 10G Copper (PoE) | A     | 10Gb Ethernet over Cat6a (or better) cabling. RJ45. Supports PoE.<br><b>Important Note:</b> If using PoE with ZyPer4K units; the ZyPer4K must have a path to the ground. Please see Appendix 3 for additional information.  |
| Utility Network  | B     | 10/100/1000Base-T Ethernet port. (Neutrik NE8FDX-P6) Used for general purpose device attachment to network.   |
| Audio            | C     | Audio Output Jack. (Switchcraft D3F-XLR) Drives line-level stereo audio. Pin 1 = Audio Return, Pin 2 = Right Channel, Pin 3 = Left Channel  |
| USB-A            | D     | USB 2.0 Type A port. (Switchcraft EHUSBABX) Configuration and routing of USB handled by the ZMP. (Only compatible with other XR and XS units)   |
| HDMI Output      | E     | HDMI 2.0 Output port. (Switchcraft EHDMI2)  |
| Power            | F     | 120/220V AC Power input. Requires Neutrik NAC3FX-W-TOP connector.<br><b>Power cords do not ship with units.</b> Example Cable below:<br><br><a href="https://www.fullcompass.com/prod/517787-blizzard-true-main-1406-powercon-true1-compatible-to-edison-cable-14awg-6?gad_source=1&amp;gclid=EA1aIQobChM1rlvqiNjbiAMVFTYIBR16UTWsEAQYASA">https://www.fullcompass.com/prod/517787-blizzard-true-main-1406-powercon-true1-compatible-to-edison-cable-14awg-6?gad_source=1&amp;gclid=EA1aIQobChM1rlvqiNjbiAMVFTYIBR16UTWsEAQYASA</a><br>BEgKyiPD_BwE |
| LED Status       | G     | LED illuminated when unit outputting video  |
| LED Power        | H     | LED illuminated when unit is powered  |



## ZyPer4K XR Decoder (Fiber)

Fiber Gasket



| Port Name       | Index | Definition   |
|-----------------|-------|--|
| 10G Fiber       | A     | 10Gb Ethernet over Fiber. LC connector. (Neutrik N02-4FDW-1-A) Multimode or Single mode SFP module integrated into the unit. (MMF Gasket = Black, SMF Gasket = Yellow) <b>Note: MMF supports 50um fiber cable only</b>   |
| Utility Network | B     | 10/100/1000Base-T Ethernet port. (Neutrik NE8FDX-P6) Used for general purpose device attachment to network.  |
| Audio           | C     | Audio Input/Output Jack. (Switchcraft D3F-XLR) Drives line-level stereo audio.   |
| USB-A           | D     | USB 2.0 Type A port. (Switchcraft EHUSBABX) Configuration and routing of USB handled by the ZMP configuration. (Only compatible with other XR and XS units) Provides up to 0.5A of power (5V)  |
| HDMI Output     | E     | HDMI 2.0 Output port. (Switchcraft EHDMI2)   |
| Power           | F     | 120/220V AC Power input. Requires Neutrik NAC3FX-W-TOP connector. <b>Power cords do not ship with units.</b> Example power cord link below:<br><br><a href="https://www.fullcompass.com/prod/517787-blizzard-true-main-1406-powercon-true1-compatible-to-edison-cable-14awg-6?gad_source=1&amp;gclid=EA1alQobChM1rlvqiNjbiAMVFTYIBR16UTWsEAQYASA">https://www.fullcompass.com/prod/517787-blizzard-true-main-1406-powercon-true1-compatible-to-edison-cable-14awg-6?<br/>gad_source=1&amp;gclid=EA1alQobChM1rlvqiNjbiAMVFTYIBR16UTWsEAQYASA<br/>BEgKyiPD_BwE</a> |
| LED Status      | G     | LED illuminated when unit is outputting video  |
| LED Power       | H     | LED illuminated when unit is powered   |



## ZyPer4K-XR Decoder Mounting Hole and Reset Pin

The hardware reset pin for the ZyPer4K-XR decoder is located on the side of the unit with the Stage-Clamp Mount Point. (Note image below enhanced to better show the location of the reset pin hole. There is no white dot to mark the reset pin hole.)

The ZyPer4K-XR encoder has a mounting hold for standard Truss Clamps. Thread is M10x1.5mm (course) with a maximum thread depth of 28mm.



| Port Name         | Index | Definition   |
|-------------------|-------|--|
| <b>RESET</b>      | A     | Reset to factory defaults. Disconnect power. Delete unit from ZMP GUI. Using a wire or paper clip, lightly press into this hole while powering on the unit. Hold for 15 seconds to reset the unit to factory defaults. |
| <b>Mount Hole</b> | B     | Stage-Clamp Mount Point. Thread M10x1.5mm (course). Max thread depth 28mm.   |

### Important Notes about mounting:

When using a Stage/Truss clamp there is a requirement that the ZyPer4K-XR unit be "hung" from the bolt or "perched" on the bolt. The center of mass for the unit shall be directly downward from the bolt.

If the axis of the bolt is not vertical, the side plate of the ZyPer-XR units can be torqued and stressed to the level that could cause permanent deformation or damage to the unit. Example accepted orientation is shown below:



## Wallplate Decoder (US form factor-front)



| Port Name       | Index | Definition  |
|-----------------|-------|---|
| Utility Network | A     | 10/100/1000Base-T Ethernet port. Used for general purpose device attachment to network.   |
| Audio           | B     | Audio Output Jack. Drives line-level stereo audio.  |
| USB-A           | C     | USB 2.0 Type A ports. Configuration and routing of USB handled by the ZMP configuration. (Compatible with ZyPer4K units if Icron included. Compatible with XS/XR units if Icron not included) Each port provides up to 0.5A of power (5V) |
| HDMI Output     | D     | HDMI 2.0 Output port.   |
| LED Status      | E     | LED illuminated when unit is outputting video.  |
| LED Power       | F     | LED illuminated when unit is powered  |
| IR-OUT          | G     | Infrared Commands information passed back FROM decoders as configured by ZMP. <b>Note:</b> Must use IR emitter shipped in box with unit.  |
| IR-IN           | H     | Infrared Commands to be passed TO decoders as configured by ZMP. <b>Note:</b> Must use IR receiver shipped in box with unit.  |
| RS 232 Port     | J     | RS232 Control Port for sending and receiving side-band serial traffic to/from decoders as directed by ZyPer Management Platform (ZMP)   |

| Port Name | Index | Definition   |
|-----------|-------|--|
| Reset     | K     | Reset to factory defaults. Disconnect power. Delete unit from ZMP GUI. Using a wire or paper clip, lightly press into this hole while powering on the unit. Hold for 15 seconds to reset the unit to factory defaults. (Note reset hole highlighted in drawing above. Hole is located under the cover plate) |

## Wallplate Decoder (US form factor-back)



| Port Name        | Index | Definition  |
|------------------|-------|---|
| Power            | A     | 24V DC Power. Phoenix connector.<br><b>Note:</b> Power supply does not ship with unit. Recommend to use PoE power.  |
| 10G Copper (PoE) | B     | 10Gb Ethernet over Cat6a (or better) cabling. RJ45. Supports PoE.<br><b>Important Note:</b> If using PoE with ZyPer4K units; the ZyPer4K must have a path to the ground. This grounding can be accomplished by using a shielded network cable (F/UTP) or the connected HDMI display is grounded. (i.e. A 3-prong power connector on display) Please see Appendix 3 of this manual for additional information. |

### Note on PoE Power:

It is important to remember that the ZyPer4K wallplate is a device that requires a 10Gb network. Therefore any PoE injector must also support 10Gb data transfer.

## ZyPer4K

ZeeVee recommends the following 10G PoE Injector for use with the ZyPer4K wallplate and ZyPer4K-XS copper units.

*Proset PT-PSE104GB-60-10*

To support PoE the following minimum Ethernet cable requirements must be met.

- Must be Cat6a 23AWG Solid Copper Twisted Pair.
- **Must be shielded**
- Maximum Length 328ft (100m)
- DC Loop Resistance per Pair  $< 25\Omega$
- DC Resistance Unbalance per Pair 3% or  $< 200m\Omega$

### **Important Note**

If using a Network Switch to provide PoE power to the ZyPer4K devices, it is important that the switch itself be protected against electrical surges that could be caused by something like a lightning strike. An appropriate surge protector should be placed between the Network Switch and AC power source.

## Wallplate Decoder (EU form factor-front)



| Port Name       | Index | Definition   |
|-----------------|-------|--|
| Utility Network | A     | 10/100/1000Base-T Ethernet port. Used for general purpose device attachment to network.  |
| Audio           | B     | Audio Output Jack. Drives line-level stereo audio.   |
| USB-A           | C     | USB 2.0 Type A ports. Configuration and routing of USB handled by the ZMP configuration. (Compatible with ZyPer4K units if Icron included. Compatible with XS/XR units if Icron not included) Each port provides up to 0.5A of power (5V)  |
| HDMI Output     | D     | HDMI 2.0 Output port.  |
| LED Status      | E     | LED illuminated when unit is outputting video  |
| LED Power       | F     | LED illuminated when unit is powered   |
| IR-OUT          | G     | Infrared Commands information passed back FROM decoders as configured by ZMP. <b>Note:</b> Must use IR emitter shipped in box with unit.   |
| IR-IN           | H     | Infrared Commands to be passed TO decoders as configured by ZMP. <b>Note:</b> Must use IR receiver shipped in box with unit.   |
| RS 232 Port     | J     | RS232 Control Port for sending and receiving side-band serial traffic to/from decoders as directed by ZyPer Management Platform (ZMP)  |
| Reset           | K     | Reset to factory defaults. Disconnect power. Delete unit from ZMP GUI. Using a wire or paper clip, lightly press into this hole while powering on the unit. Hold for 15 seconds to reset the unit to factory defaults. (Note reset hole highlighted in drawing above. Hole is not red) |

## Wallplate Decoder (EU form factor-back)



| Port Name               | Index | Definition  |
|-------------------------|-------|---|
| <b>Power</b>            | A     | 24V DC Power. Phoenix connector.<br><b>Note:</b> Power supply does not ship with unit. Recommend to use PoE power.  |
| <b>10G Copper (PoE)</b> | B     | 10Gb Ethernet over Cat6a (or better) cabling. RJ45. Supports PoE.<br><b>Important Note:</b> If using PoE with ZyPer4K units; the ZyPer4K must have a path to the ground. This grounding can be accomplished by using a shielded network cable (F/UTP) or the connected HDMI display is grounded. (i.e. A 3-prong power connector on display) Please see Appendix 3 of this manual for additional information. |

**Note on PoE Power:**

It is important to remember that the ZyPer4K wallplate is a device that requires a 10Gb network. Therefore any PoE injector must also support 10Gb data transfer.

ZeeVee recommends the following 10G PoE Injector for use with the ZyPer4K wallplate and ZyPer4K-XS copper units.

*Proctet PT-PSE104GB-60-10*

To support PoE the following minimum Ethernet cable requirements must be met.

- Must be Cat6a 23AWG Solid Copper Twisted Pair.
- **Must be shielded**
- Maximum Length 328ft (100m)
- DC Loop Resistance per Pair < 25Ω

- DC Resistance Unbalance per Pair 3% or  $< 200\text{m}\Omega$

**Important Note**

If using a Network Switch to provide PoE power to the ZyPer4K devices, it is important that the switch itself be protected against electrical surges that could be caused by something like a lightning strike. An appropriate surge protector should be placed between the Network Switch and AC power source.

---

## Options

Most ZyPer4K Encoders or Decoders can be ordered with a single 10G bulk media port that is either Fiber Ethernet or Copper Ethernet. Only one of those options is supported at a given time. (Wallplate units available as Copper only)

| Type            | Encoder | Decoder | Parameter   |
|-----------------|---------|---------|---|
| Fiber Ethernet  | ✓       | ✓       | Single 10GBASE-F-xx receptacle supporting installation of:<br>Duplex fiber cable, SFP+ module (1 LC connector)<br><i>SFP+ module sold separately.</i> |
| Copper Ethernet | ✓       | ✓       | Single 10GBASE-T RJ45 connector   |

\*\*only one of the above may be installed at a given time


---

## Other Ports

| Type                | Standard Encoder | Standard Decoder | XS/XR Encoder | XS/XR Decoder | Parameter   |
|---------------------|------------------|------------------|---------------|---------------|---|
| Utility Ethernet    | ✓                | ✓                | ✓             | ✓             | Single 1GBASE-T- RJ45 receptacle for general purpose connectivity at Encoder or Decoder side. Traffic is switched onto same logical segment as the bulk media traffic.<br><i>Recommend connection to a terminal leaf.</i> |
| RS232               | ✓                | ✓                |               | *             | Connector: 1-DB9 Standard 9-pin Female DCE connector. Communication: up to 115.2K baud<br><b>Note:</b> XSE Decoder unit supports RS232. Connector is 3-pin phoenix.   |
| USB-A (2)           |                  | ✓                |               |               | [optional] 2 x Standard USB 2.0 Type-A port (Not available on Quiet/Fanless)  |
| USA-A (1)           |                  |                  |               | ✓             | 1 x Standard USB 2.0 Type-A port. Only compatible with other XS/XR units.   |
| USB-B               | ✓                |                  |               |               | [optional] 1x Standard USB2.0 Type-B port   |
| Mini USB-B or USB-C |                  |                  | ✓*            |               | 1 x Mini USB 2.0 Type-B port. Only compatible with other XS/XR units.<br><b>Note:</b> XSE Encoder supports a single USB-C connector. Unit may have configurable Icron unit installed.                                     |

| Type         | Standard Encoder | Standard Decoder | XS/XR Encoder | XS/XR Decoder | Parameter  |
|--------------|------------------|------------------|---------------|---------------|--|
| Analog Audio | ✓                |                  | ✓*            |               | <p>3.5mm L/R analog audio jack</p> <p>2-channel L/R line level stereo input<br/>— or ZMP configured as —</p> <p>2-channel L/R stereo output<br/>(down-mixed from HDMI port of encoder)</p> <p><b>Note:</b> XSE units support 5-pin phoenix connector</p> |
| Analog Audio |                  | ✓                |               | ✓*            | <p>3.5mm L/R analog audio jack</p> <p>2-channel L/R stereo output</p> <p><b>Note:</b> Updated XS units support 5-pin phoenix connector</p>   |
| IR Input     | ✓                | ✓                |               |               | <p>3.5mm plug for IR Capture Dongle (ZeeVee Model#: Z4KIRRX )</p> <p><i>** capture dongle sold separately</i></p>  |
| IR Output    | ✓                | ✓                |               |               | <p>3.5mm plug for IR Transmitter (ZeeVee Model#: Z4KIRTX)</p> <p><i>** transmit dongle sold separately</i></p>   |


Analog Audio Jack supports a 3.5mm PC-audio type plug with the pinout as shown to the right:

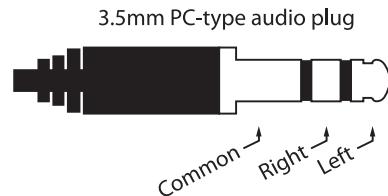

## Setting Up ZyPer4K in a Point to Point Environment

A point to point, or one to one environment involves connecting one source directly to one display. A network switch is not needed in this basic configuration. This environment also does not require configuration through the ZyPer4K management software and is a true “plug and play” setup.

*If using analog audio, RS232 or Infrared, you may need to configure the Encoder and Decoder with our management software. See the ZyPer4K Management Platform User Manual for more information.*

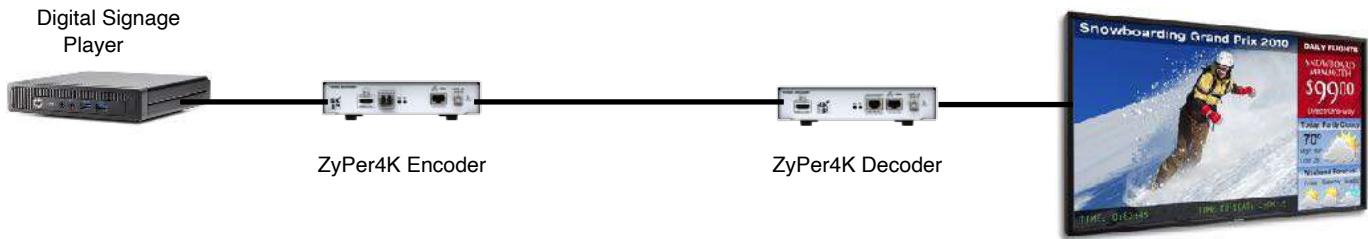

1. Connect HDMI cable from active source to Encoder (HDMI In port). Ensure Encoder is plugged in and pwr LED light illuminated. When HDMI cable is connected, the video (vid) light will illuminate.
2. Connect Ethernet cable either using SFP+ module (Fiber) or RJ45 jack (Copper) between Encoder and Decoder. (Both Encoder and Decoder must be same configuration. Fiber or Copper in this configuration)
3. Connect HDMI cable from active display to Decoder (HDMI Out port). Ensure Decoder is plugged in and that pwr light is illuminated.

## Dante Embedded Platform (DEP)



Some ZyPer4K Encoders and Decoders support DEP. This means every endpoint can be configured to support both Dante transmission and receive functionality.

| Feature              |                   | Supported/Description                     |
|----------------------|-------------------|---|
| Dante Audio channels |                   | 2x2 (input x output)                      |
| Sample rate          |                   | 44.1, 48, 88.2, 96 kHz                    |
| Audio format         |                   | LPCM only                                 |
| PCM sample format    |                   | Signed 32-bit little endian               |
| Z4K Encoder          | Dante transmitter | HDMI-in or local analogue audio input     |
|                      | Dante receiver    | To Z4K audio network                      |
| Z4K Decoder          | Dante transmitter | From Z4K audio network                    |
|                      | Dante receiver    | HDMI-out and local analogue audio output. |

### Important Note

Dante Embedded Platform can be implemented to operation on either LAN port ZyPer4K units. In a single LAN configuration, the Dante function and standard Z4K AV function share the same LAN. Dante AV-A requires its own IP Address that is different and independent from the IP Address of the ZyPer4K itself. This IP address cannot be changed in Dante Controller.

**Important Note:** The Utility port must be enabled for Dante to operate even if the Utility port is not being used for Dante transfers. (10G port being used) Customers that are using a DHCP server to generate IP Addresses must ensure the pool of available IP Addresses accounts for any ZyPer4K endpoints with Dante Embedded in the system.

For a Dual LAN configuration, Dante Embedded Platform requires its own IP Address that is different and independent from the IP Address of the ZyPer4K itself. This could include the DEP IP address being on a different subnet. Customers that are using a DHCP server to generate IP Addresses must ensure the pool of available IP Addresses accounts for any ZyPer4K endpoints with Dante Embedded Platform in the system.

If no DHCP server is available, DEP will assign itself a Link-Local address. However, if there is a DHCP server, but there are not enough addresses available in the pool, Dante connections may fail.

## ZyPer4K

## Critical Note:

For Dual LAN configuration. The Dante LAN port and Primary Z4K 10G LAN port should never be on the same subnet. This will cause IP conflicts that could result in video not properly flowing on the network. (Note this means that you cannot have both ports set to a Link-Local address. You must manually configure one of the two ports to a different subnet)

## Dante on primary 10G LAN (This is the same LAN)

| zeevee                   |               | ZyPer Management Platform |                   |        |                                    |                          |              |                          |               | admin                    | P           | G                        |              |                          |              |
|--------------------------|---------------|---------------------------|-------------------|--------|------------------------------------|--------------------------|--------------|--------------------------|---------------|--------------------------|-------------|--------------------------|--------------|--------------------------|--------------|
| Display Grid(7)          |               |                           |                   |        |                                    |                          |              |                          |               | Actions                  |             |                          |              |                          |              |
| Status                   |               | Routing                   |                   | Config |                                    | VideoOut                 |              | Network                  |               | EDID                     |             | Firmware                 |              | RS-232                   |              |
| ?                        | Name          | ?                         | MAC Address       | ?      | IP Mode                            | ?                        | IP Addr      | ?                        | IP Mask       | ?                        | IP Gateway  | ?                        | USB IP Addr  | ?                        | Utility Port |
| <input type="checkbox"/> | Z4K-XS-Dec    | <input type="checkbox"/>  | 00:16:c0:4d:e3:12 | dhcp   | <input type="button" value="Set"/> | <input type="checkbox"/> | Set          | <input type="checkbox"/> | Set           | <input type="checkbox"/> | Set         | <input type="checkbox"/> | Set          | <input type="checkbox"/> | Set          |
| <input type="checkbox"/> | UHD60-1D      | <input type="checkbox"/>  | 00:1c:d5:01:09:65 | dhcp   | <input type="button" value="Set"/> | <input type="checkbox"/> | 192.168.0.31 | <input type="checkbox"/> | 255.255.255.0 | <input type="checkbox"/> | 192.168.0.1 | <input type="checkbox"/> | none         | <input type="checkbox"/> | disabled     |
| <input type="checkbox"/> | Dec-XSE       | <input type="checkbox"/>  | 00:1c:d5:0c:01:c3 | dhcp   | <input type="button" value="Set"/> | <input type="checkbox"/> | 192.168.0.25 | <input type="checkbox"/> | 255.255.255.0 | <input type="checkbox"/> | 192.168.0.1 | <input type="checkbox"/> | 192.168.0.27 | <input type="checkbox"/> | enabled      |
| <input type="checkbox"/> | UHD60-1DA     | <input type="checkbox"/>  | 34:1b:22:81:f9:88 | dhcp   | <input type="button" value="Set"/> | <input type="checkbox"/> | 192.168.0.32 | <input type="checkbox"/> | 255.255.255.0 | <input type="checkbox"/> | 192.168.0.1 | <input type="checkbox"/> | none         | <input type="checkbox"/> | NA           |
| <input type="checkbox"/> | XSE-Dec-Combo | <input type="checkbox"/>  | 6c:df:fb:00:03:a0 | dhcp   | <input type="button" value="Set"/> | <input type="checkbox"/> | 192.168.0.32 | <input type="checkbox"/> | 255.255.255.0 | <input type="checkbox"/> | 192.168.0.1 | <input type="checkbox"/> | none         | <input type="checkbox"/> | enabled      |
| <input type="checkbox"/> | XSE_Dec_Built | <input type="checkbox"/>  | 6c:df:fb:00:03:c2 | dhcp   | <input type="button" value="Set"/> | <input type="checkbox"/> | 192.168.0.5  | <input type="checkbox"/> | 255.255.255.0 | <input type="checkbox"/> | 192.168.0.1 | <input type="checkbox"/> | none         | <input type="checkbox"/> | disabled     |
| <input type="checkbox"/> | Z4K-Dec2      | <input type="checkbox"/>  | d8:80:39:59:f0:36 | dhcp   | <input type="button" value="Set"/> | <input type="checkbox"/> | 192.168.0.28 | <input type="checkbox"/> | 255.255.255.0 | <input type="checkbox"/> | 192.168.0.1 | <input type="checkbox"/> | 192.168.0.25 | <input type="checkbox"/> | disabled     |

**Dante on Utility Port (1G LAN)** This is a different LAN

| zeevee                   |               | ● 1                      | ZyPer Management Platform |         |                                      |                          |              | admin         | P           |                          |              |                          |                |                          |                          |   |
|--------------------------|---------------|--------------------------|---------------------------|---------|--------------------------------------|--------------------------|--------------|---------------|-------------|--------------------------|--------------|--------------------------|----------------|--------------------------|--------------------------|---|
| Display Grid(7)          |               |                          |                           |         |                                      |                          |              |               |             |                          |              |                          |                |                          |                          |   |
| Status                   | Routing       | Config                   | VideoOut                  | Network | EDID                                 | Firmware                 | RS-232       | ☰             |             |                          |              |                          |                |                          |                          |   |
| ?                        | Name          | ?                        | MAC Address               | ?       | IP Mode                              | ?                        | IP Addr      | ?             | IP Mask     | ?                        | IP Gateway   | ?                        | USB IP Addr    | ?                        | Utility Port             | ? |
| <input type="checkbox"/> | Z4K-XS-Dec    | <input type="checkbox"/> | 00:16:c0:4d:e3:12         | dhcp    | <input type="button" value="Set ✓"/> | <input type="checkbox"/> | 192.168.0.12 | 255.255.255.0 | 192.168.0.1 | <input type="checkbox"/> | none         | <input type="checkbox"/> | disabled       | <input type="checkbox"/> | Set ✓                    |   |
| <input type="checkbox"/> | UHD60-1D      | <input type="checkbox"/> | 00:1c:d5:01:09:65         | dhcp    | <input type="button" value="Set ✓"/> | <input type="checkbox"/> | 192.168.0.31 | 255.255.255.0 | 192.168.0.1 | <input type="checkbox"/> | none         | <input type="checkbox"/> | NA             | <input type="checkbox"/> |                          |   |
| <input type="checkbox"/> | Dec-XSE       | <input type="checkbox"/> | 00:1c:d5:0c:01:c3         | dhcp    | <input type="button" value="Set ✓"/> | <input type="checkbox"/> | 192.168.0.25 | 255.255.255.0 | 192.168.0.1 | <input type="checkbox"/> | 192.168.0.27 | <input type="checkbox"/> | onlyDanteAudio | <input type="checkbox"/> |                          |   |
| <input type="checkbox"/> | UHD60-1DA     | <input type="checkbox"/> | 34:1b:22:81:f9:88         | dhcp    | <input type="button" value="Set ✓"/> | <input type="checkbox"/> | 192.168.0.32 | 255.255.255.0 | 192.168.0.1 | <input type="checkbox"/> | none         | <input type="checkbox"/> | NA             | <input type="checkbox"/> |                          |   |
| <input type="checkbox"/> | XSE-Dec-Combo | <input type="checkbox"/> | 6c:df:fb:00:03:a0         | dhcp    | <input type="button" value="Set ✓"/> | <input type="checkbox"/> | 192.168.0.32 | 255.255.255.0 | 192.168.0.1 | <input type="checkbox"/> | none         | <input type="checkbox"/> | enabled        | <input type="checkbox"/> | <input type="checkbox"/> |   |
| <input type="checkbox"/> | XSE_Dec_Built | <input type="checkbox"/> | 6c:df:fb:00:03:c2         | dhcp    | <input type="button" value="Set ✓"/> | <input type="checkbox"/> | 192.168.0.5  | 255.255.255.0 | 192.168.0.1 | <input type="checkbox"/> | none         | <input type="checkbox"/> | disabled       | <input type="checkbox"/> |                          |   |
| <input type="checkbox"/> | Z4K-Dec2      | <input type="checkbox"/> | d8:80:39:59:f0:36         | dhcp    | <input type="button" value="Set ✓"/> | <input type="checkbox"/> | 192.168.0.28 | 255.255.255.0 | 192.168.0.1 | <input type="checkbox"/> | 192.168.0.25 | <input type="checkbox"/> | disabled       | <input type="checkbox"/> |                          |   |



---

## Dante Operation

It is expected that the user is familiar with Dante and the use of Dante networks. It is beyond the scope of this document to provide Dante training.

The Dante Transmitter found in the ZyPer4K encoder/decoder will insert the *analog audio* or *HDMI audio* stream that it is receiving onto the Dante Network. Note that the audio must be unencoded/unencrypted. Only raw PCM audio can be inserted onto the Dante network. It is possible the AV video network and the Dante audio network are in fact the same network. It is not possible to route Dante audio traffic from one VLAN onto another VLAN.

By default if only HDMI audio is available, this audio stream will be inserted onto the Dante network. If Analog audio is available via the Analog audio input port; then this audio stream will be inserted onto the Dante network instead of any available HDMI audio.

Network settings are the same as standard ZyPer4K encoders/decoders. Some switches may require additional settings to work with a Dante network. For example the Netgear M4300 series requires settings detailed at the following location:

<https://kb.netgear.com/000060205/M4300-Configuration-Guide-for-Dante-Audio-Devices>

The user should consult the documentation for the switch provider being used.

In Dante Controller the device will appear as a Transmitter and Receiver with the name DEP-  
YYYYYY

YYYYYY - Represents the final bytes of the Dante Controllers MAC Address

Note that the device can be renamed in Dante Controller software.  
A factory reset of the ZyPer4K will restore the default Dante name.

**Important Note:** ZyPer4K Dante devices should never be made the Dante Clock Leader.  
Please select another Dante device as the Clock Leader (Preferred Leader)

Below are screen shots from *Dante Controller*.

## Dante Status

Dante Controller - Device View (XSE-Decoder-DEP-000355)

File Devices View Help

Receive Transmit Status Latency Device Config Network Config AES67 Config

XSE-Decoder-DEP-000355

Manufacturer Information

Manufacturer: Zeevee Pty Ltd  
Model Name: DEP  
Product Version: 1.0.1

Dante Information

Dante Model: Dante Embedded Platform  
Dante Software Version: 1.3.1.1

Clock Synchronization

Mute Status: Unmuted  
Sync Status: Locked  
External Word Clock: No  
Preferred: No  
Frequency Offset: -24 ppm

Interfaces


P  IP Address: 192.168.0.24  
MAC Address: 6C:DF:FB:00:03:55  
Tx Utilization: 12 Kbps, Errors 0  
Rx Utilization: 13 Kbps, Errors 0

[Clear Counters](#)

**Important Note:** The **Sample Rate** must be set to the correct rate of the incoming audio.

Incorrect setting of the **Sample Rate** field will cause a Dante Transmitter to not see audio as available to transmit.

Incorrect setting of the **Sample Rate** field will cause a Dante Receiver to not receive audio from a Dante Transmitter.

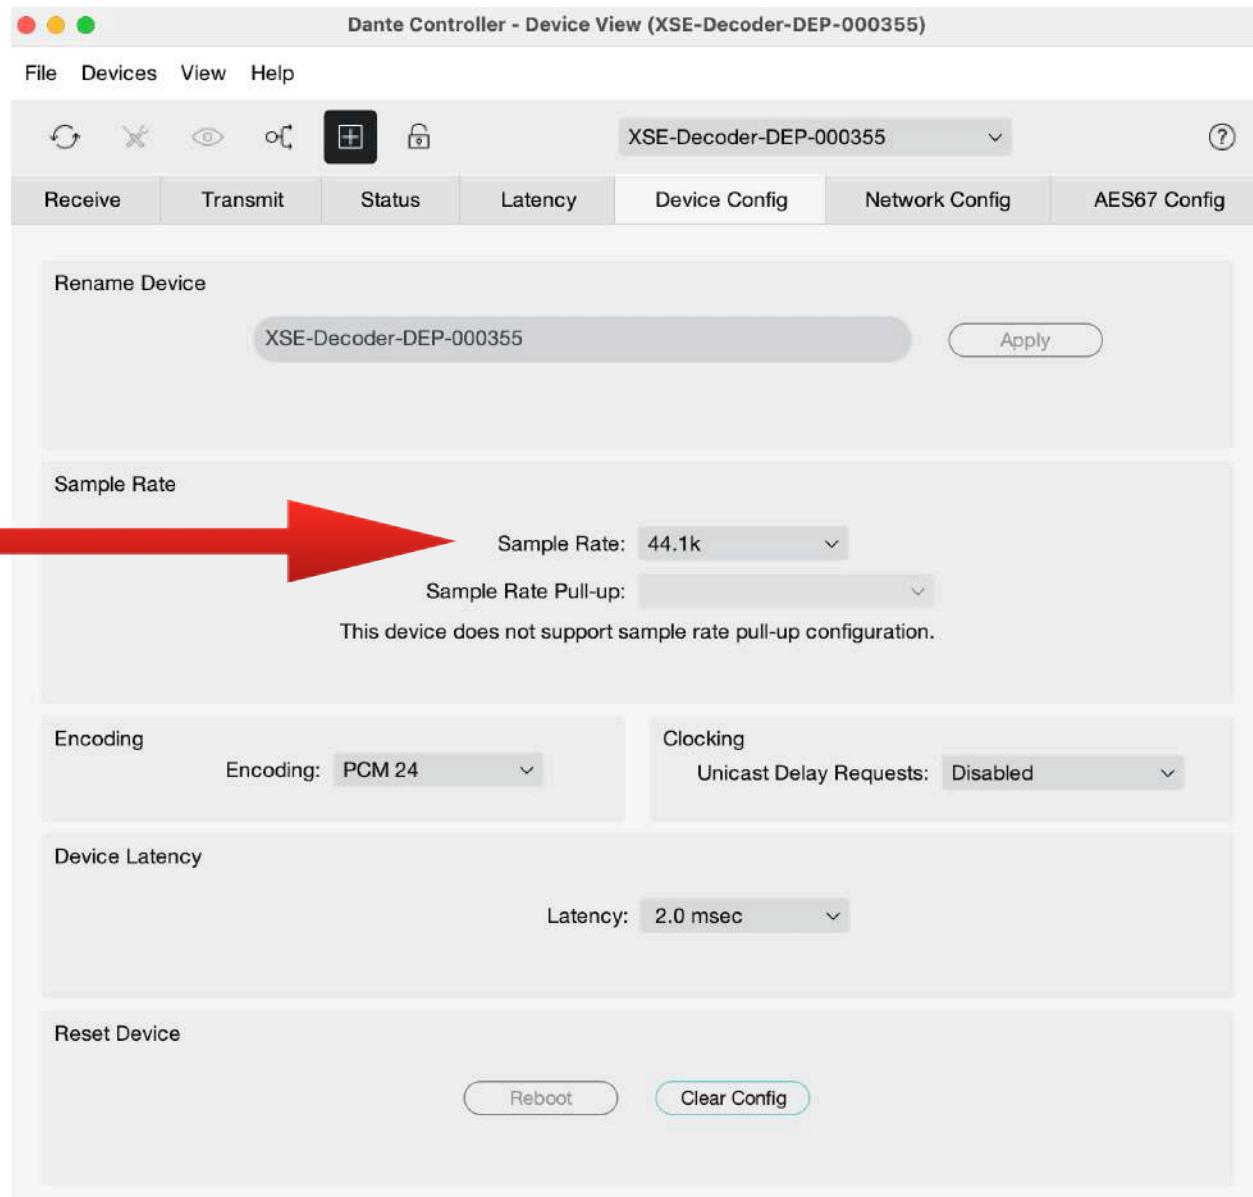

## Dante API Commands

The following are important API commands related to Dante operation on supported ZyPer4K-XSE Encoders and Decoders.

To have Dante on the primary 10G Network

**API Command:**

*set device NAME utilityPort enabled*

(Note can also set this from ZMP GUI. See images below)

To have Dante on the 1G Utility port (Separate LAN)

**API Command:**

*set device NAME utilityPort onlyDanteAudio*

(Note can also set this from ZMP GUI. See images below)

### Encoder Commands

#### Transmitter Function

Set the source for the transmitter to use for Dante audio. Options are HDMI input or Analog audio input.

**Select HDMI**

*set encoder ENC\_NAME danteAudioOut hdmiAudioDownmix*

**Select Analog Audio**

*set encoder ENC\_NAME danteAudioOut analogAudio*

### Encoder Commands

#### Receiver Function (Receive Dante Audio from another source and output on Analog port)

*set encoder ENC\_NAME analogAudioOut source directDanteAudio*

#### Receiver Function (Receive Dante Audio from another source and route to Z4K Decoder)

*join ENC\_NAME DEC\_NAME danteAudio*

*set decoder DEC\_NAME hdmiAudioOut source danteAudio*

### Decoder Commands

#### Transmitter Function

*set decoder DEC-NAME danteAudioOut source hdmiAudioDownmix*

## Decoder Commands


### Receive Function

```
set decoder DEC_NAME analogAudioOut source directDanteAudio  
set decoder DEC_NAME hdmiAudioOut source directDanteAudio
```

**Note:** You can use both commands above at the same time. This will provide Dante audio out from both HDMI and Analog Audio Ports

## Setting up ZyPer4K in Many to Many Environment

A many to many, or switched environment involves connecting many sources to many displays. ZyPer4K allows you a flexible and scalable amount of input-output options without limitations. For example, in a 24-port configuration, you can configure a 1x23, 6x18, or 4x20 (and so on) system. A network switch is needed in these many to many configurations. These environments also require configuration through the ZyPer4K management software.


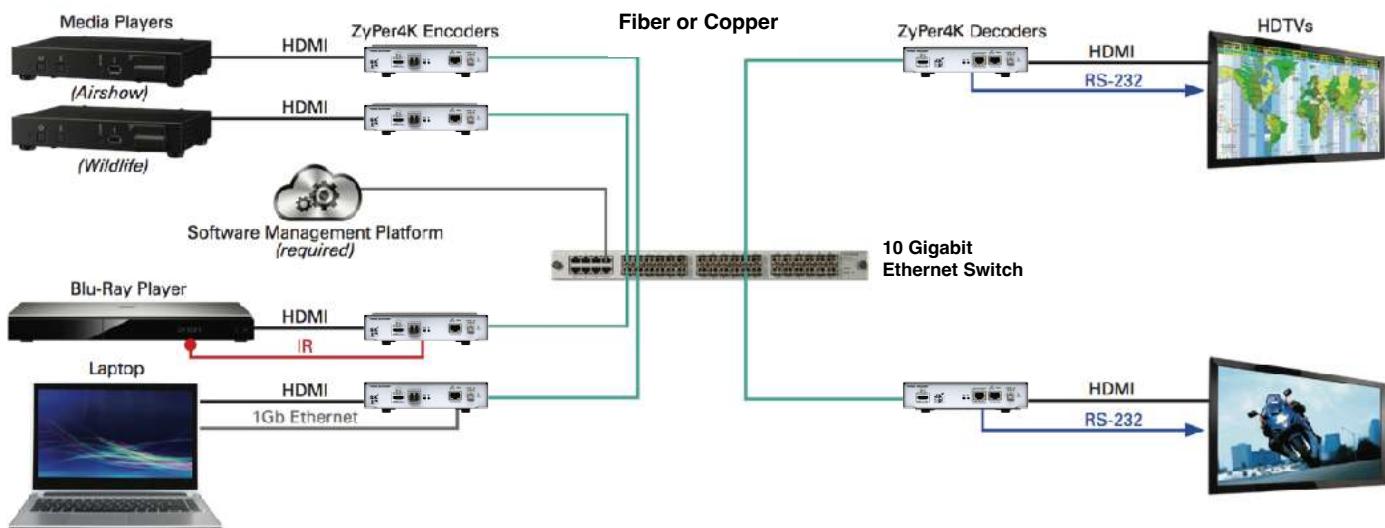


### To set up ZyPer4K in a multipoint environment, you have to:

- Connect the ZyPer4K Management Platform hardware to the network switch
  - Determine the IP Address of the ZMP (See the Management Platform User Guide for details)
- Connect all Encoders and Decoders to the 10Gb network switch
- Connect a PC or Laptop to the network switch.
  - Make sure laptop is on same “network” as the MP
  - Open a Chrome browser and point it to the IP Address of the MP. (This opens ZyPer Management Platform (ZMP))
  - Login to the MP using the default username and password. “admin” / “admin”
  - All devices (encoders and decoders) will automatically appear in ZMP

## ZyPer4K

- Switch (or route) video from sources to displays
  - Drag source onto display to route video/audio

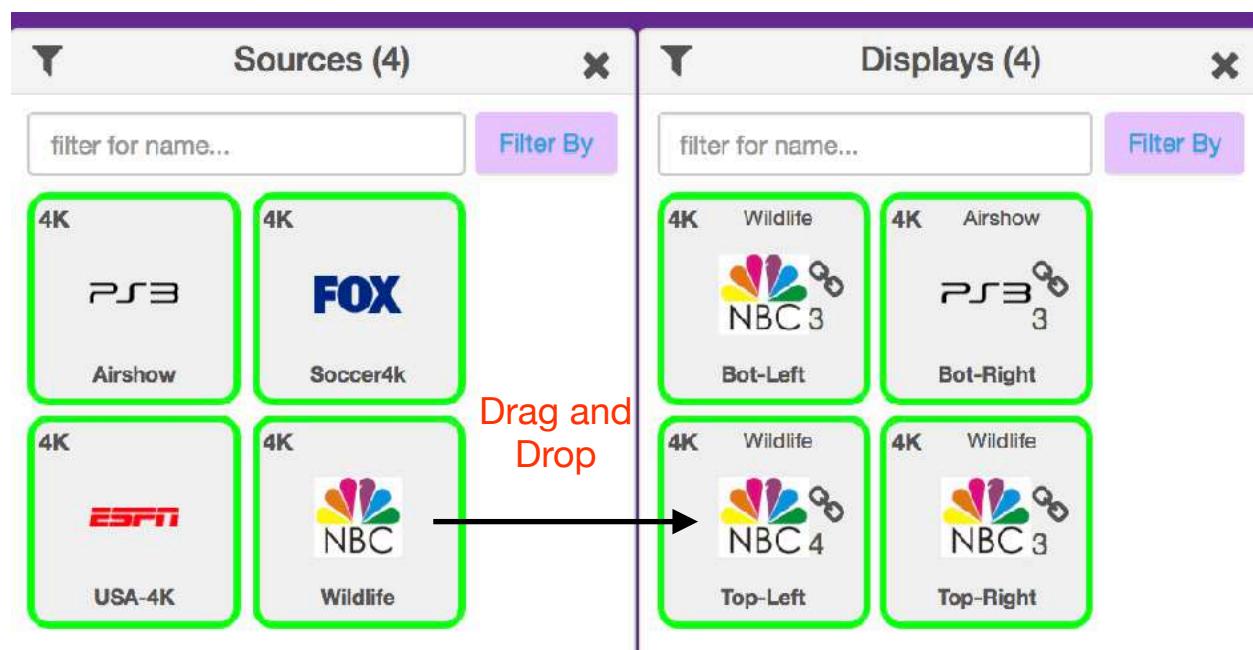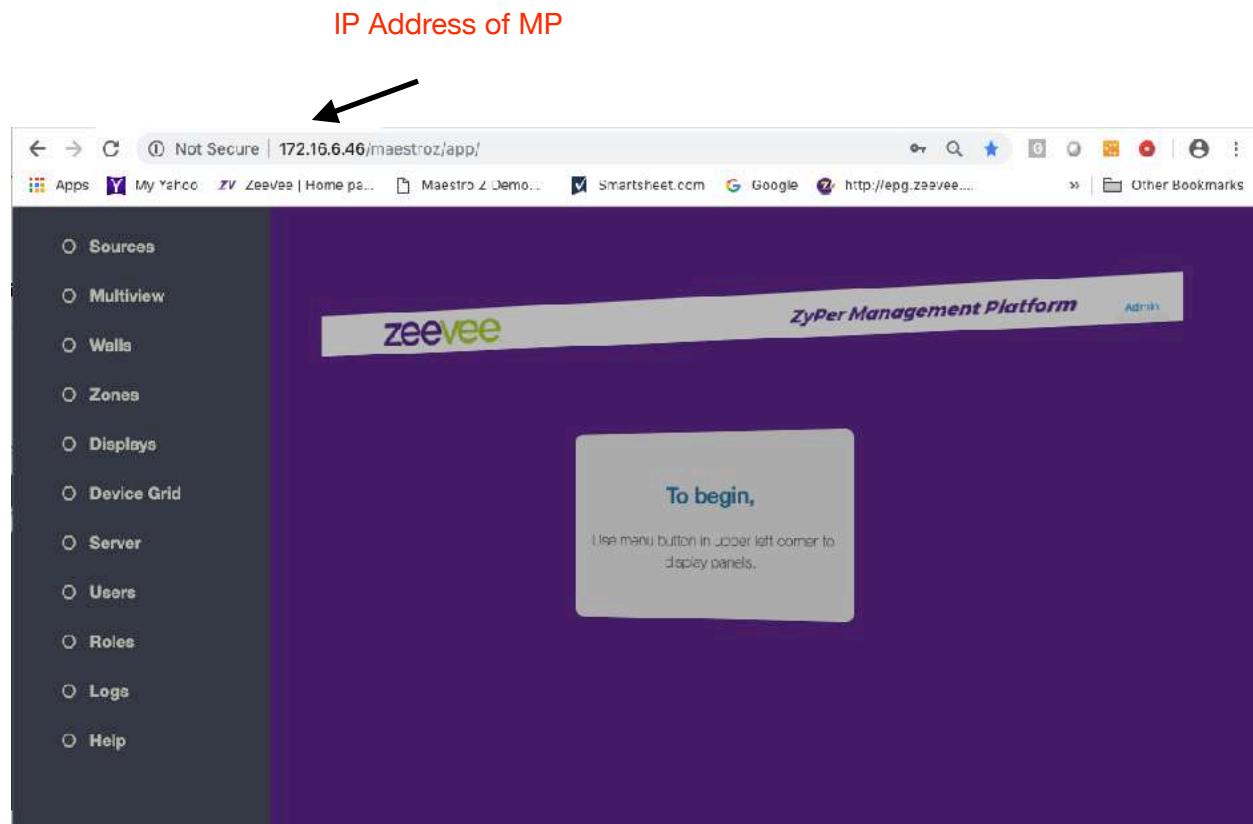

## ZyPer4K

Please consult the *ZyPer Management Platform User Manual* for additional details on switching/routing video from sources to displays.

Please consult the *ZyPer4K Network Requirements and Security Considerations* document for details on Network switch requirements.

Both documents are available on the ZeeVee website:

<https://www.zeevee.com/documentation>

## Icron USB Details (Optional Feature most units)


The ZyPer4K provides for USB-over-LAN communications using an optional Icron chipset.

The ZyPer4K Encoder contains a Virtual USB Hub while the ZyPer4K decoder contains a USB Host. This configuration provides support for connecting an Encoder to up to 7 Decoders. The total number of connected USB devices is limited to USB bandwidth.

Maximum number of supported USB Hops is 5. However 2 hop are already in the ZyPer4K unit.

Device types include the following:

- USB Keyboard
- USB Mouse
- USB Pen Tablet & Signature Pad
- USB Card Readers
- USB Flash Memory
- USB Hard Disk
- USB CD-ROM
- USB Camera

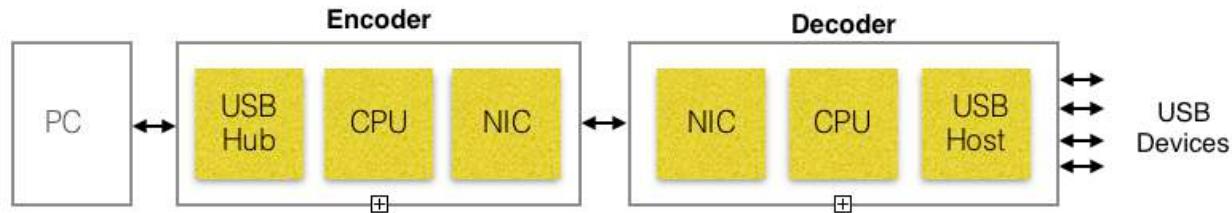

**Important Notes:** The Icron USB chipset requires its own independent IP address. This address can only be obtained via a DHCP server, or alternately it will take a Link-Local address.

The ZyPer4K unit itself should never be assigned a Static IP address if the Icron USB chipset is installed. The ZyPer4K should be set to use DHCP or Link-Local.

ZyPer4K video/audio stream can be routed between subnets if the Network and Z4K units are configured properly. **However the Icron USB chipset signals cannot be routed between subnets.**

### ZyPer4K-XSE Ability to Disable Icron:

Some ZyPer4K-XSE units are available with a combo card that provides support for both Icron USB and Dante. The Icron USB function can be disabled if there is a desire to maintain USB compatibility with other ZyPer4K-XS/XSE units that do not have this combo card option installed.

## USB Details (Standard Feature XS/XSE/XR units)

The ZyPer4K provides for USB-over-LAN communications.

The ZyPer4K Encoder contains a USB Device Port while the ZyPer4K decoder contains a USB Host. This configuration provides support for connecting an Encoder to a single Decoder. The total number of connected USB devices is limited to 2 per decoder.

Device types include the following:

USB Keyboard

USB Mouse

USB Touch Panels

**Note:** ZyPer4K-XS/XR units only support USB communication between other ZyPer4K-XS/XR units. Also supports USB to Wallplate units not containing the Icron chipset.

## ZyPer4K USB Interoperability

The chart below details USB interoperability between ZyPer4K USB enabled endpoints. Please note the updated ZyPer4K-XSE units can disable Icron function if desired.

|             |                       | Decoders  |                        |  |  |                          |                   |  |                                      |
|-------------|-----------------------|---|------------------------|--|--|--------------------------|-------------------|--|--------------------------------------|
|             |                       | Z4K-XS  | Z4K-XSE                | Z4K-XSE<br>Dante+Icron                       | Z4KXS-WallPlate  | Z4KXS-WallPlate<br>Icron | Z4K-Icron         | Z4K-XR   |                                      |
| USB Routing |                       | Applicable Models   | Z4KDEC3XS<br>Z4KDEC3XS | Z4KXS-D<br>Z4KXS-D<br>Z4KC2XS-D<br>Z4KF2XS-D | Z4KCC3XS-DAU<br>Z4KCC3XS-DAU<br>Z4KC2XS-DAU<br>Z4KF2XS-DAU | Z4KDECC3XS-WPUS          | Z4KDECC3XS-WPUS-I | Z4KDEC3U<br>Z4KPODEC3U<br>Z4KDEC3U<br>Z4KDPDEC3U | Z4KDEC3XR<br>Z4KDECFSR<br>Z4KDECFLXR |
| Encoders    | Z4K-XS                | Z4KENCC3XS<br>Z4KENCFS  | Yes                    | Yes  | Yes<br>(Disable Icron)                                     | Yes                      | No                | No   | Yes                                  |
|             | Z4K-XSE               | Z4KC2XS-E<br>Z4KF2XS-E  | Yes                    | Yes  | Yes<br>(Disable Icron)                                     | Yes                      | No                | No   | Yes                                  |
|             | Z4K-XSE Dante+Icron   | Z4KC2XS-EAU<br>Z4KF2XS-EAU  | Yes<br>(Disable Icron) | Yes<br>(Disable Icron)                       | Yes  | Yes<br>(Disable Icron)   | Yes               | Yes  | Yes<br>(Disable Icron)               |
|             | Z4KXS-WallPlate       | Z4KENCC3XS-WPUS   | Yes                    | Yes  | Yes<br>(Disable Icron)                                     | Yes                      | No                | No   | Yes                                  |
|             | Z4KXS-WallPlate-Icron | Z4KENCC3XS-WPUS-I   | No                     | No   | Yes<br>(USB 2.0 only)                                      | No                       | Yes               | Yes  | No                                   |
|             | Z4K-Icron             | Z4KENCFS<br>Z4KENC3U<br>Z4K12GSDIENCFS<br>Z4K12GSDIENC3U<br>Z4KDPENCFS<br>Z4KDPENCC3U<br>Z4KANLENCF3U<br>Z4KANLENCC3U<br>Z4KHDMIENCFS<br>Z4KHDMIENC3U | No                     | No   | Yes<br>(USB 2.0 only)                                      | No                       | Yes               | Yes  | No                                   |
|             | Z4K-XR                | Z4KENCC3XR<br>Z4KENCFSR<br>Z4KENCFLXR   | Yes                    | Yes  | Yes<br>(Disable Icron)                                     | Yes                      | No                | No   | Yes                                  |

Red = USB not supported between devices

Yellow = USB HID supported between devices (May require Icron to be disabled in XSE unit)

Green = Full USB 2.0 support between devices.

Blue = USB Host port does not support direct connection to a USB 3.0 port. USB Hub is required between encoder and PC.

---

## Important Note on ZyPer4K-XSE Decoders

ZyPer4K-XSE Rev 1 models with Icron have a limitation when used with the Icron chipset implemented in non-XS ZyPer4K units. This impacts the following part numbers.

### Part Numbers:

Z4KCXS-DAU (Semtech and Icron USB)

Z4KFXS-DAU (Semtech and Icron USB)

### USB Limitation:

When the ZyPer4K Encoder is a “white box” or “Wall plate”; the Icron enabled XSE decoder USB feature will only work with USB 2.0 devices connected to it. Decoder will not function with USB 1.0 or USB 1.1 devices. Devices such as keyboards and mice.

**Workaround:** Connect an external USB HUB to the ZyPer4K-XS Decoder. This will allow any USB 1.0, 1.1 or 2.0 device to function properly. Kramer added internal USB hub in Rev 2 of the ZyPer4K-XSE hardware.

### Updated Part Numbers: (Rev 2)

Z4KC2XS-DAU (Semtech and Icron USB)

Z4KF2XS-DAU (Semtech and Icron USB)

**Note:** Connection of external USB HUB should only be done while the ZyPer4K unit is powered off. Do not hot plug USB HUB into ZyPer4K.



## Technical Specifications

### Encoder and Decoder HDMI Video Specifications

All encoders and decoders have one exposed HDMI port. It is an input on the encoder and an output on the decoder. All the parameters in terms of the formats of video and audio carried are the same for either.

| HDMI  | ZyPer4K |     |   |
|---|---------|-----|---|
|   | Enc     | Dec |   |
| HDMI Standard Port  | ✓       | ✓   | HDMI 2.0 with HDR* and HDCP 2.2 Support   |
| Direction   | ✓       |     | Input   |
|   |         | ✓   | Output  |
| Connector   | ✓       | ✓   | Type-A receptacle (female)  |
| HDMI Resolutions<br>(USB-C support on<br>XS and wallplate<br>encoder) | ✓       | ✓   | <p>Supports all major VESA resolutions and variations including full <b>HDMI 2.0 and HDR* support:</b></p> <p>640x480 (p/i)<br/>     720x576 (25Hz/50Hz)(p/i)<br/>     800x600 (p)<br/>     1024x768 (p)<br/>     1280x720 (p/i)<br/>     1280x1024 (p)<br/>     1366x768 (p)<br/>     1440x1080 (p)<br/>     1600x1200 (p)<br/>     1920x1080 (p/i) <b>Including 120 Hz, 144 Hz and 240 Hz</b><br/>     2560x1440 (p) <b>Including 120 Hz and 144 Hz support</b><br/>     2048x1536 (p)<br/>     3840x2160 (p) <b>Including 4:4:4, 60 Hz support</b><br/>     4096x2160 (p) <b>Including 4:4:4, 60 Hz support</b></p> <p>all at 24/25/29.97/30/50/59.94/60Hz refresh rates except where noted</p> <p>HDR fully supported in “Genlocked” mode</p> <p>HDR inputs reduced to 8-bits on output in “Fast-Switch mode”</p> |

| HDMI       |     | ZyPer4K |   |
|------------|-----|---------|---|
|            | Enc | Dec     |   |
| HDMI Audio | ✓   | ✓       | <p>All encoded audio formats plus LPCM (8 channels)<br/>           (HDMI to HDMI audio is “passed-through” from encoder to decoder)</p> <p><i>Additional restrictions may result from the audio supported at encoder’s input.</i></p> |

---

## Decoder DisplayPort Video Specifications

| DisplayPort |   | ZyPer4K                    |  |
|-------------|---|----------------------------|--|
| Dec         |   |                            |  |
| DisplayPort | ✓ | DisplayPort 1.2a with HDR* |  |
| Direction   | ✓ | Output                     |  |
| Connector   | ✓ | Type-A receptacle (female) |  |

| DisplayPort             | ZyPer4K  |
|-------------------------|--|
| DisplayPort Resolutions | <p>✓ Supports all major VESA resolutions and variations including full HDR* support:</p> <p>640x480 (p/i)<br/>     720x576 (25Hz/50Hz)(p/i)<br/>     800x600 (p)<br/>     1024x768 (p)<br/>     1280x720 (p/i)<br/>     1280x1024 (p)<br/>     1366x768 (p)<br/>     1440x1080 (p)<br/>     1600x1200 (p)<br/>     1920x1080 (p/i)<br/>     2048x1536 (p)<br/> <b>3840x2160 (p) Including 4:4:4, 60 Hz support</b><br/> <b>4096x2160 (p) Including 4:4:4, 60 Hz support</b></p> <p>all at 24/25/29.97/30/50/59.94/60Hz refresh rates except where noted</p> <p>HDR fully supported in “Genlocked” mode</p> <p>HDR inputs reduced to 8-bits on output in “Fast-Switch mode”</p> |
| Additional Specs        | <p>5.4Gbps, 4-Lane DP/eDP Transmitter</p> <ul style="list-style-type: none"> <li>- Compliant with VESA DP/eDP Standard V1.2a</li> <li>- DP/eDP Link Clock Frequency up to 540 MHz</li> <li>- 6-bit, 8-bit, 10-bit and 12-bit Deep Color modes</li> <li>- Single Stream Transport (SST)</li> </ul>  |

## Physical and Environmental

The following parameters apply to all encoders and decoders unless specifically stated otherwise.

| Type                                   | Parameter   |
|--|---|
| A/C Adapter                            | 100-1240VAC 50-60Hz 0.7-0.45A draw on AC Mains<br><br>Output Max: 12VDC 2.5A  |
| ZyPer4K unit power consumption         | 12VDC at 1.2A max 12W nominal (Standard Fiber Encoder/Decoder)<br>12VDC at 1.6A max 15W nominal (Standard Copper Encoder/Decoder)<br>12VDC at 1.2A max 12.5W nominal (Extended input Fiber Encoder)<br>12VDC at 1.6A max 15.5W nominal (Extended input Copper Encoder)<br>USB Option (Adds 660mW power to above versions)<br>12VDC at 1.5A max 8.2W nominal (XS/XR version Encoder/Decoder)<br>12VDC at 2.2A max 13.0W nominal (XSE Encoder/Decoder)<br>24VDC at 1.0A max 9.0W nominal (Wall plate Encoder/Decoder)<br><b>Note:</b> Connecting USB devices to Decoders can add up to 5.0W of power. |
| Dimensions (LxWxH)<br>maximum envelope | 144mm x 175mm** x 43mm* (Decoder/Encoder with no extended input option)<br>144mm x 228mm** x 43mm* (Encoder with extended input option)<br>145mm x 164mm x 44mm* (Quiet/Fanless Decoder)<br>116mm x 199mm x 47mm (XS encoder/decoder)<br>136mm x 199mm x 48mm (XSE encoder/decoder)<br>199mm x 220mm x 71mm (XR encoder/decoder)<br>123.9mm x 171.5mm x 45.9mm (US Wallplate HxWxD)<br>86mm x 222.5mm x 45.9mm (EU Wallplate HxWxD)<br><br>*subtract 6mm from height if rubber feet are removed<br>** add 48mm to overall width if both mounting ears are installed                                 |
| Weight                                 | 880g (Decoder, Encoder with no extended input option)<br>850g (Quiet/Fanless Decoder)<br>1070g (Encoder with extended input option)<br>850g (XS Encoders and Decoders)<br>1000g (XSE Encoders and Decoders)<br>2100g (XR Encoders and Decoders)   |
| Operating Temperature                  | 0° C to +40° C (32° F to 104° F)  |
| Non-Operating Temp                     | -20° C to +80° C (-4° F to +176° F)   |
| Humidity (op/storage)                  | 20% to 90% (Non-Condensing)   |
| Coating                                | White, satin anti-microbial powder coat<br>Black, anti-microbial powder coat (Quiet/Fanless Decoder and XS/XSE/XR units)  |

## General Safety and Care Instructions

---

### Safety

**WARNING:** When using electronic products, basic precautions should always be followed, including:

- Keep these instructions.
- Heed all warnings.
- Follow all instructions.
- Do not use this apparatus near water.
- Clean only with in accordance with cleaning instructions included in this manual.
- Do not block any ventilation openings. Install in accordance with the manufacturer's instructions for spacing and clearance to allow proper airflow.
- Do not install or place this product near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- Do not defeat the safety purpose of the grounding-type plug. A grounding type plug has two blades and a third grounding prong. The third prong is provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
- Power cord must be accessible to allow for the removal of the power from the unit.
- Protect the power cord from being walked on or pinched, particularly at plugs, convenience receptacles, and the point where cords exit from the apparatus.
- Unplug this apparatus during lightning storms.
- Unplug this apparatus when unused for long periods of time.
- Only use attachments/accessories supplied or specified by the manufacturer.
- Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or excessive moisture, does not operate normally, or has been dropped.



**WARNING:** To reduce the risk of fire or electric shock do not operate this apparatus in a position where it is exposed to dripping or splashing liquids, rain, moisture, or excessively high humidity. Objects containing liquid shall not be placed in proximity to the unit such that they present a risk of spillage onto the apparatus.

**Shock and Fire Hazard:**

The unit's metal case, power supply, and grounding terminals and lugs are essential in containing radio energy as well as safeguarding the user from any risk of electrical shock. The metal shell of the unit protects the internal circuitry from environmentally induced over stress conditions and is an integral part of the compliant system.



**WARNING: Do not open the box or in any way expose the internal circuitry.**



**WARNING: There are no user-serviceable parts inside the unit. Opening or damaging the ZyPer4K unit in any way voids the warranty and immediately nullifies any assertion of regulatory compliance made by ZeeVee. Any required service shall be performed by trained and qualified service personnel authorized by ZeeVee.**



---

## Cleaning

---

### Encoder, Decoder and ZyPerMP Unit Cleaning Procedures

#### Before cleaning:



1. Switch off or fully disconnect the AC power from the external supply unit connector to the ZyPer unit.
2. If the state of the AC power cannot be established, disconnect the DC input plug from the ZyPer unit before proceeding.

#### Cleaning Procedure:

1. Any unused cable receptacles should be covered with the supplied rubber plugs or a piece of tape to prevent cleaner from entering and possibly affecting operation.
2. Clean the exterior of the unit with a soft cotton cloth that has been lightly moistened with an approved and recognized cleaning agent.

The exterior of the unit has been tested for compatibility with, and resistance to, the following products:

- ◆ Alcohol (Isopropyl and Ethyl)
- ◆ Ammonia-based cleaners (Windex)

*In case none of the above cleaning products is available, water may be used.*

The ZyPer4K unit is fairly tolerant to cleaning with moistened cleaning cloths, but the unit is not fluid tight. Care should be taken to not spray cleaner directly on to the unit or into the vents to avoid liquid ingress and damage to the internal electronics.



***CAUTION: Do not apply or spray liquid directly on to the unit's exterior as excess liquid may cause damage to internal electronics. Apply the liquid to the cleaning cloth first.***

3. Repeat with water-moistened cloth only.

4. Wipe with a dry cloth

5. Air vents shall be checked to make sure that they are free of accumulated lint or blockages.

Should the air vents appear clogged use a vacuum cleaner with a soft-bristle brush attachment to loosen and draw the debris out of the vents and away from the unit.

Do not loosen and blow the debris in to the unit as internal buildup of debris will degrade the ability of the unit to cool itself and reliability may be adversely affected.

Do not apply power if there is any evidence of fluid in the interior of the unit.

---

### ZyPerMP Specific Cleaning Procedure



The ZyPerMP control unit is not designed to be placed in an environment that would subject it to impurities that require as frequent cleaning as the encoder and decoder units. Should the ZyPerMP unit need cleaning, the same procedures apply as enumerated above, only a very sparing amount of cleaner should be applied to the cleaning cloth.

## Important Siting and Application Considerations

---

### ZyPer4K Equipment Type and Uses

#### ZyPer4K Intended Uses

- Equipment is intended for the distribution of Audio Visual Information in and around a facility.
- Equipment is intended to distribute Human Interface and control information over the same network as the Audio Visual information following the same or different logical distribution paths.
- Equipment does not generate video information itself, but accepts and distributes video information from industry-standard devices which generate such audio visual information.
- Equipment is intended for the sophisticated display and presentation of decoded information that has been distributed by companion ZyPer4K equipment.
- Equipment is intended to be controlled from a central control node (the ZyPerMP) which ties in to a customer control system for sophisticated presentation and management of the information flow and direction.



**WARNING:** The installer should test and validate a complete setup with the actual devices before deploying to a final production installation.

---

## Installation Environment

The general area where the ZyPer4K unit is to be installed shall be clean and free of obstructions or clutter.

---

### Mounting Options

- Unit may be mounted horizontally on the installed rubber feet
- Unit may be bolted to a horizontal surface using the provided L-brackets with or without feet installed.
- Unit may be mounted vertically only if appropriate clearance is provided around the grille work for adequate airflow. The appropriate ZyPer4K rack mount kits insure that airflow space is sufficient when mounting vertically.
- Units may be stacked in a horizontal orientation providing stack is no higher than 3 units when using the provided rubber feet
  - Greater stacking requires that the user remove the rubber feet and externally bracing the stack of units.
- In all cases, insure that the units are rigidly held in place and will not be subject to impact and there is no possibility of toppling.
- Do not stack any other equipment or devices on top of the unit weighing more than 3Kg and only if sufficient bracing is provided to protect against toppling.



**WARNING:** Failure to adhere to these recommendation could result in unsafe operation, damage to the equipment, or injury to the operators.

---

### Mounting Brackets

Standard units only. XS, XSE and XR units not supported.

ZyPer4K equipment may be used horizontally and simply sit upon the rubber feet that are factory installed. It is recognized that in some sites a more rigid and secure installation is desired. To that end, there are available L-shaped brackets which may be optionally used to rigidly affix the unit to a shelf, wall, or any sturdy surface.

Part number for the L-shaped brackets is **Z4KCMNTBRKT**


It is up to the installer to provide the appropriate screws or bolts to affix the unit to whatever surface it is to be mounted.

## ZyPer4K


The optional L-Brackets allow for the ZyPer4K unit to be rigidly mounted flat to a cart, plate, wall, or any type of flat surface. The hole, cross, and slot cutouts allow for great flexibility in mounting



When using the L-Brackets, first remove the screws and rubber feet on the bottom of the unit. Retain the screws as they will be used to affix the L-Brackets to the ZyPer4K unit body. The rubber feet are not used when mounting with the L-Brackets.

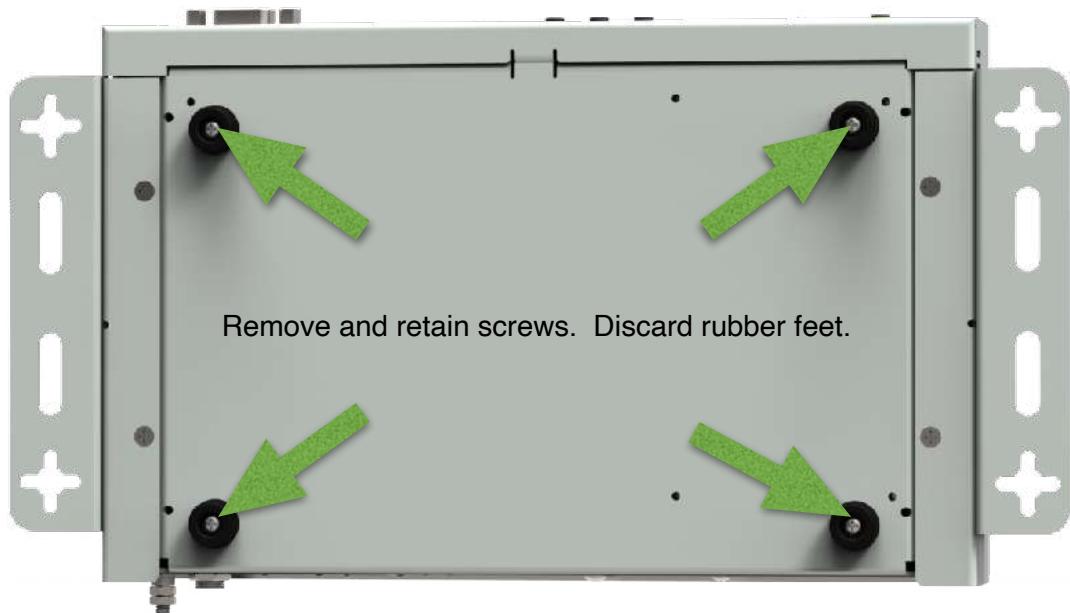

Affix the L-Brackets to the sides of the unit using the retained screws from the rubber feet (repeat for each side).

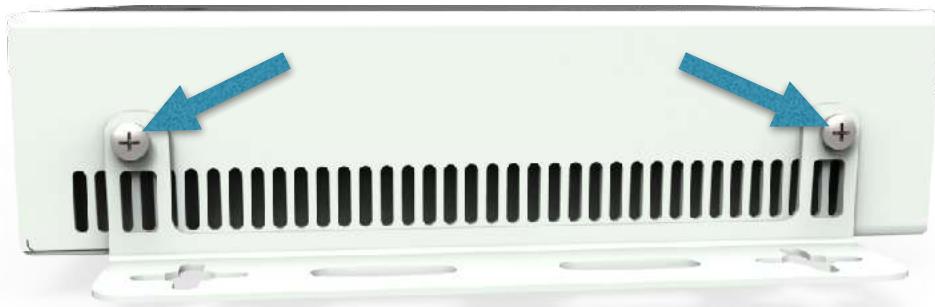

**Recommended mounting hardware for rigid mount**

The installer must provide the appropriate hardware to mount the L-Brackets to whatever surface is used.

**Drywall:** When mounting to drywall, ZeeVee recommends use of Drywall anchors for #6 up to #10 hardware and washers appropriate to the size screw utilized. The recommended sequence of hardware would be; Drywall anchor, Flat Washer, ZyPer4K L-Bracket, Flat Washer, Screw or Bolt.

**Sheet Metal Shelf or Equipment:** #6 up to #10 thread-forming or thread-cutting machine screws. Pilot holes should be drilled using the equipment as an outline template. Should the removal of equipment periodically be required use thread-cutting screws. The recommended sequence of hardware would be; Flat Washer, ZyPer4K L-Bracket, Flat washer, Lock Washer (when using thread cutting screw), Screw or Bolt.

There should be 4 sets of screws and associated hardware in as “outboard” a position as is practicable.

## VESA Mounting Bracket


There is an optional VESA mounting bracket available from ZeeVee for mounting most unit styles to shelves, walls or other sturdy surfaces as well as directly to VESA compatible displays. This VESA bracket is compatible with any standard size ZyPer4K encoder or decoder. Extended box encoders and XR units are not supported.

Part number for this custom bracket is Z4KVESABRK

The VESA mounting bracket supports standard VESA parameters for mounting directly to rear of a display. 100x100, 100x200 and 200x200 VESA hole mounts are supported.


When using the VESA bracket, first remove the screws and rubber feet on the bottom of the ZyPer4K unit. Retain the screws as they will be used to affix the VESA bracket to the ZyPer4K unit body. The rubber feet are not used when mounting with the VESA bracket. XS/XSE units are mounted to the very center holes (either direction) and use the provided spacers.

Note that mounting ZyPer4K to the rear of display would use the available VESA mounting holes and may prevent the display from using these holes to mount the display to a wall. See examples on following page .

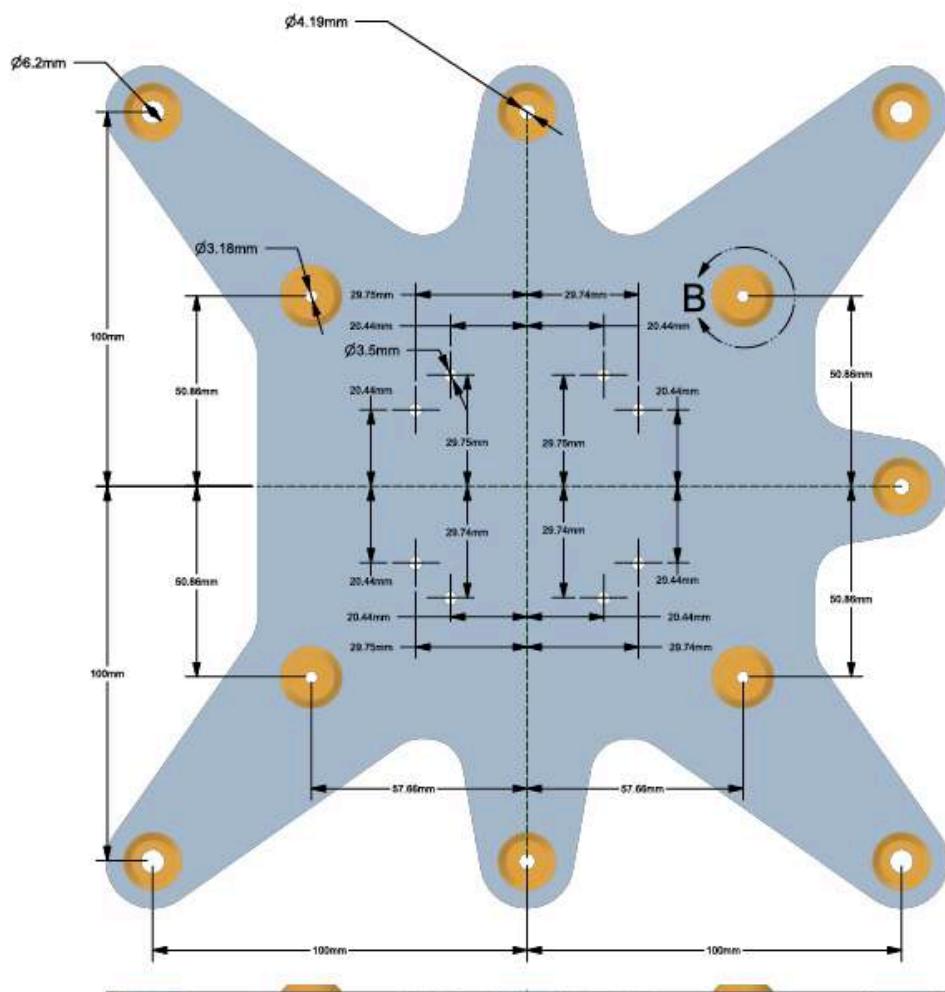

## ZyPer4K

Example mounting ZyPer4K to center of 200x200 VESA bracket using all 4 mounting holes/screws. This would prevent the use of wall mounting bracket hardware.

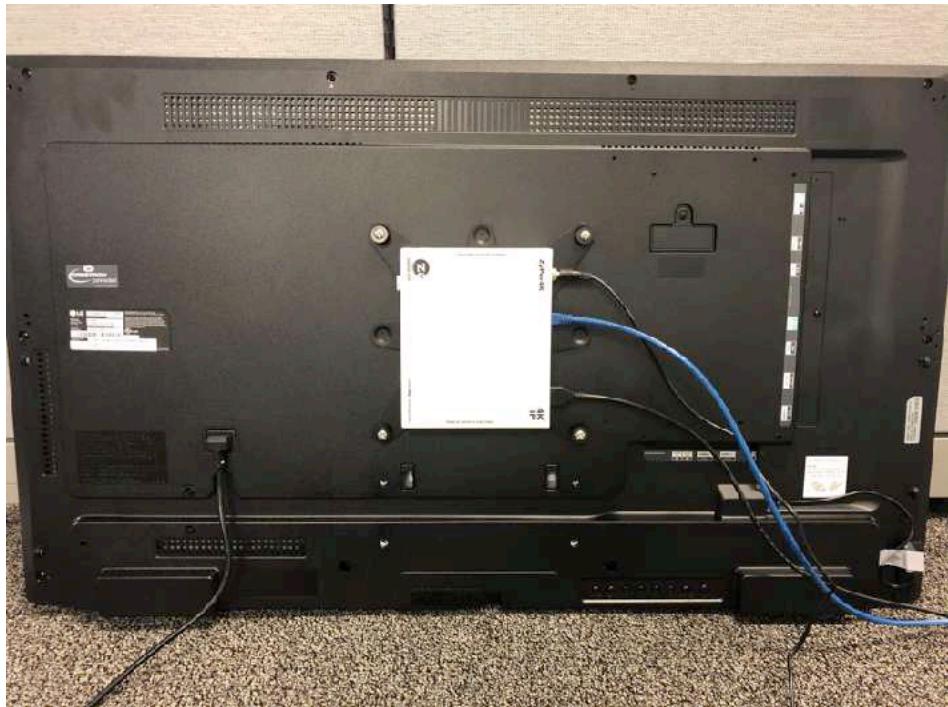

Example mounting ZyPerK to side of 200x200 VESA bracket using 2 mounting holes/screws. This **may** enable use of wall mounting bracket hardware.



## Ventilation

Ambient environmental temperature and humidity shall not exceed that specified in the Detailed Specifications portion of this document.

Ambient temperature in this case refers to the temperature of air entering the device through the ventilation grille. Care should be taken to not enclose the device or deploy in a fashion where airflow loops or local “hot spots” can cause the inlet air to rise above the specified limit for normal operation.

In general 25mm ( $\approx$  1inch) of clearance should be provided around the ventilation openings unless an external air mover insures that the inlet temperature is at or below the specified limit.

If the equipment is mounted in an enclosed cabinet, it is the job of the installer to insure that within the cabinet or enclosure the ZyPer4K equipment does not experience local temperatures in excess of that specified in the Detailed Specifications portion of this document.

---

## Water and moisture

Never expose the ZyPer4K unit to direct rain, moisture, or excessively high humidity.

Never use the device near water - e.g. near a bathtub, basin, pool, sink, or in a wet basement.

Clean only in accordance with the instructions in this manual.

---

## AC Mains Connection

The ZyPer4K Encoder and Decoder units are powered through an external AC/DC converter unit.

The Encoder and Decoder units must be powered and connected using the supplied external AC/DC converter. The voltage supplied to the Encoder and Decoder units from the external supply is 12VDC at less than 2.0A

- Do not substitute the supplied AC/DC power supply unit with another component. The overall system compliance is dependent on each of the provided elements being present and operational.



**INFORMATION:** The introduction of a foreign, non-ZeeVee element nullifies any claim of regulatory compliance asserted by ZeeVee.

The AC/DC power supply shall be powered from the appropriately rated AC mains voltage which allows for a wide range of input, generally from 100VAC through 240VAC.

Only use a power cord with an appropriately rated protective earth connection. The protective earth connection is essential to the overall safety of the system.



**WARNING:** Bypassing or omitting the protective earth connection increases the risk of electrical shock and radio emissions



Install the equipment in such a manner as the IEC power cord ingress in to the AC/DC adapter is accessible as this is the boundary of the AC mains system and the point at which the ZyPer4K equipment is disconnected from the AC mains power if needed.

The equipment should be installed as near as is practicable to an AC outlet.

- Do not substitute or extend the DC cable from the AC/DC unit.

The ZyPer4K system is intended and rated for continuous operation

Should the ZyPer4K equipment be unused for an extended period of time it should be disconnected from the AC mains at the AC inlet to the external AC/DC converter in order to protect the equipment from transient over-voltage conditions.

---

## AC Power Cord

Connect the external AC/DC supply unit to the AC mains with a UL-listed detachable power cord, 3-wire, type SJ or equivalent, 18 AWG min., rated 250 V min., plug 5-15P configuration for 120V application, or 6-15P for 240V application.

AC/DC converter inlet side of AC cord shall be of type IEC320C13

- Do not overload wall outlets and extension cords.

 Power cords should be routed so that they are not likely to be walked upon or pinched by items placed upon or compressing them.

Match the rating of the power cord to the voltage of the power outlet in accordance with the specific requirements and in compliance with safety standard of your particular country.

## Equipotential Referencing

Safety and compliance with standards is highly dependent on the proper crafting of the electrical realm in which electrical equipment operates. It is also good practice to properly ground all electrical equipment.

The ZyPer4K equipment may be connected to the the known and common equipotential reference by bonding the devices electrically. This is achieved by connecting the equipotential plane reference to the unit via the equipotential stud.

The ZyPer4K devices all have a universal stud on the rear of the unit near the power connector for this purpose. Two nuts are also provided to allow for a “locking connection”. This stud is sized and threaded for #8 hardware.



This is a reference point that in order to insure the voltage potential of the enclosure of the ZyPer4K unit is referenced to a known common level.



*The grounding wire and crimped lug is NOT provided as part of the ZyPer4K unit as that item is site-specific.*


## Installer-Required Action

If used, the installer must connect to the Equipotential Stud with a wire terminated with a crimped ring lug with internally toothed locking feature similar to the item shown. The locking feature insures the ring lug will not loosen over time given environmental handling or vibration.



The Equipotential Stud is an 8-32 threaded connection. Employ a ring lug of the proper diameter to insure the most reliable connection.

High-quality wire of 16 gauge or heavier is recommended by Kramer, It is the responsibility of the installer to determine the needs of the specific installation.

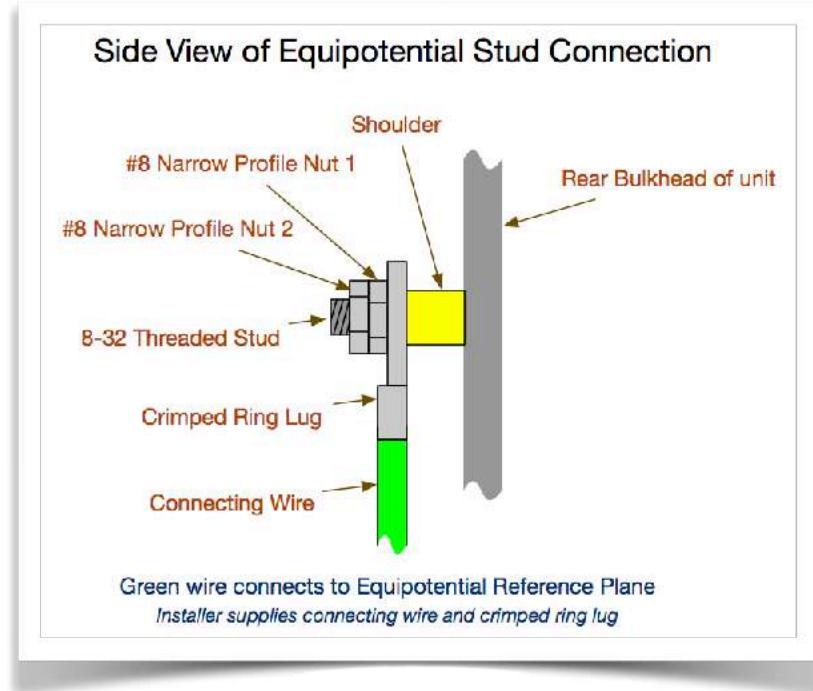

## Responsibility and Stewardship

Kramer is committed to using the planet's resources efficiently and having as little negative impact on the environment and health of mankind as possible.

Our products consume very little energy and attempt to provide the highest level of function for the smallest investment in resources.

### Reduction of Hazardous Substances (RoHS)

**RoHS Directive 2011/65/EC, Directive 2002/95/EC, Directive 2003/11/EC**

**Product Lines:**

***ZyPer Products supplied by Kramer, Inc.***


| Material                                      | Limit     |
|---|-----------|
| Lead and its compounds (Pb)                   | <1000 ppm |
| Hexavalent Chromium and its compounds (Cr VI) | <1000 ppm |
| Cadmium and its compounds (Cd)                | <100 ppm  |
| Mercury and its compounds (Hg)                | <100 ppm  |
| Polybrominated diphenyl ethers (PBDEs)        | <1000 ppm |
| Polybrominated biphenyls (PBBs)               | 1000 ppm  |
| Bis(2-Ethylhexyl) phthalate (DEHP)            | <1000 ppm |
| Benzyl butyl phthalate (BBP)                  | <1000 ppm |
| Dibutyl phthalate (DBP)                       | <1000 ppm |
| Diisobutyl phthalate (DIBP)                   | <1000 ppm |

Be advised that based on the information available to Kramer from our component and sub-assembly providers, the product lines listed above do not contain as intentional additives, any of the referenced materials at the levels indicated, as referenced in the subject EU directives. To the best of our knowledge, none of these materials are generated during production and the supplied component parts of the Kramer products do not contain the listed materials. Since we do not expect these materials to be present, we do not specifically run a complete analysis on all finished goods, excepting for periodically auditing the finished goods and component materials in certain circumstances.

This information is believed to be accurate and refers to the laws, regulations and products at the date of issue. However, Kramer makes no express or implied representations or warranties with respect to the information contained herein. It is the responsibility of our customers to determine that their use of Kramer products is safe, lawful, and technically suitable for their applications. Because of possible changes in the laws and regulations, we cannot guarantee that the status of the listed products will remain unchanged.

## Waste Electrical and Electronic Equipment

### WEEE Directive 2012/19/EU on waste electrical and electronic equipment

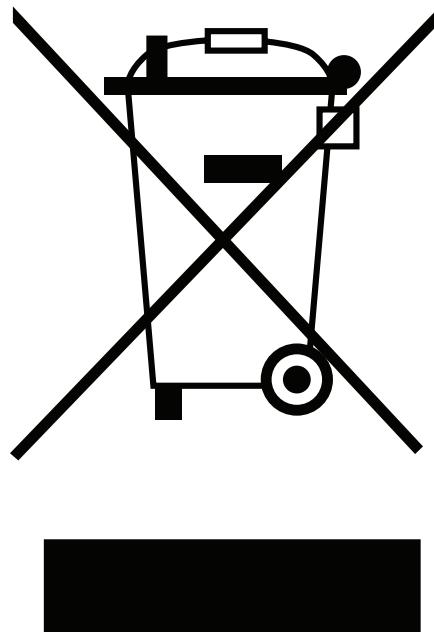

The WEEE Directives (2008/98/EC and 2012/19/EU) place an obligation on electrical equipment manufacturers and importers to recycle electronic products at the end of their useful life.

ZeeVee products that are marked with the WEEE symbol (see left) indicate that the product must NOT be disposed of with other household waste. Instead, it is the user's responsibility to dispose of their waste electrical and electronic equipment by handing it over to an approved re-processor or by returning it an authorized agent of ZeeVee or their distributor for recycling. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate these items from other types of waste and recycle them responsibly

For more information about the recycling of this product, please contact your local waste disposal authorities or local municipal waste disposal service.

For specific questions related to WEEE compliance of ZeeVee products contact:  
[zv\\_support@kramerav.com](mailto:zv_support@kramerav.com)

This information is believed to be accurate and refers to the laws, regulations and products at the date of issue. However, ZeeVee makes no express or implied representations or warranties with respect to the information contained herein. It is the responsibility of our customers to determine that their use of ZeeVee products is safe, lawful, and technically suitable for their applications. Because of possible changes in the laws and regulations, we cannot guarantee that the status of the listed products will remain unchanged.

Kramer/ZeeVee, Inc.  
295 Foster Street, Littleton, MA 01460

## FCC Compliance Statement

The ZyPer4K family of devices has been tested and found to comply with the limits for Class A Digital Devices pursuant to Part 15 of the FCC Rules. Operation is subject to the following conditions: 1) these devices may not cause harmful interference, and 2) these devices must accept any interference received including interference that may cause undesired operation.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed or used in accordance with the instructions, may cause harmful interference to radio communications. However there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. reorient or relocate the receiving antenna
2. increase the separation between the equipment and the receiver
3. connect the equipment to an outlet on a circuit different from that to which the receiver is connected
4. consult the dealer or an experienced radio/TV technician for help.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. Where shielded interface cables have been provided with the product or specified additional components or accessories elsewhere defined to be used with the installation of the product, they must be used in order to ensure compliance with FCC regulations.



***In order to insure compliance with the referenced FCC regulations, only deploy the equipment with provided or approved accessories in the manner indicated in this and other pertinent manuals.***

***Use only approved and properly shielded cables of good quality.***

Address any inquiries to:

**ZeeVee, Inc.**  
295 Foster Street, Suite 200  
Littleton, MA 01462


## EMC Information

The ZyPer4K devices should be mounted and operated in accordance with the guidelines specified in this guide to maintain the integrity of the expected EMC characteristics.

The supplied Power Supply (AC/DC Conversion unit) should be used. The ZeeVee 12V Rack Mount Power Supply (Z4KPWRCTR12) may also be used. Any other AC/DC supply has not been tested or verified to perform at the levels indicated in this manual.

Media cables are not provided and the ZyPer4K devices are generally fairly tolerant of different types and manufacture styles.

- Media cables should be of good quality and rated for the performance levels of the interface to which they are connected.
  - e.g. 4K HDMI ports should only be connected to HDMI cables rated for 4K operation at the desired resolutions.
  - e.g. 3G-SDI cables should be of the appropriated impedance and within the length restrictions of the greater 3G-SDI specification
- HDMI cables shall be of the type incorporating integral Ferrite cores in order to achieve rated compliance levels and the cleanest electromagnetic environment in the vicinity of the unit.

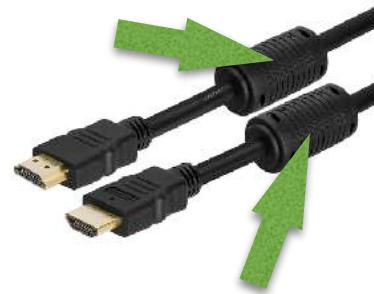

## Electromagnetic Emissions


| Test   | Compliance Level | Notes  |
|--|------------------|--|
| RF emissions: CISPR 11                                 | Group 1          | ZyPer4K emissions are very low and not expected to cause unintentional interference. |
| RF emissions: CISPR 11                                 | Class A          | Commercial equipment for use in commercial environments.                             |
| Harmonic emissions: IEC 61000-3-2                      | Class D          | Suitable for use in all commercial and domestic low-voltage environments.            |
| Voltage fluctuations/ flicker emissions: IEC 61000-3-3 | Compliant        |  |

## Electromagnetic Immunity


| Test   | IEC Standard | EN60601 Compliance Level   | Result | Deployment Note  |
|--|--------------|--|--------|--|
| Electrostatic Discharge (ESD)  | 61000-4-2    | ± 6kV contact<br>± 8kV air   | PASS   | Expect hard floor of wood, tile, ceramic, metallic material. If floor has synthetic covering, expected relative of humidity of 30% shall be maintained to avoid static charge buildup. |
| Radiated RF  | 61000-4-3    | 3 V/m<br>80 MHz to 2.5 GHz   | PASS   | Minimum separation guidelines should be observed if placing equipment close to intentional RF radiator.  |
| Electrical fast transient/burst transient  | 61000-4-4    | ± 2kV for power supply lines<br>± 1kV for input/ output lines  | PASS   | Expected power quality typical for commercial facility.  |
| Surge  | 61000-4-5    | ± 1 kV line(s) to line(s)<br>± 2 kV line(s) to earth   | PASS   | Expected power quality typical for commercial facility.  |
| Conducted RF   | 61000-4-6    | 3 Vrms<br>150 kHz to 80 MHz  | PASS   | Minimum separation guidelines should be observed if placing equipment close to intentional RF radiator.  |
| Power frequency (50/60 Hz) magnetic field  | 61000-4-8    | 3 A/m  | PASS   |  |
| Voltage dips, short interruptions and voltage variations on power supply input lines | 61000-4-11   | <5% $U_T$ 1(>95% dip in $U_T$ ) for 0.5 cycle<br>40% $U_T$ (60% dip in $U_T$ ) for 5 cycles<br>70% $U_T$ (30% dip in $U_T$ ) for 25 cycles<br>< 5% $U_T$ (>95% dip in $U_T$ ) for 5s | PASS   | Typical commercial facility power expected. Good practice dictates that a UPS system shall be employed if continued operation through any possible AC delivery disturbance is desired. |

# Physical Dimension Diagrams


## ZyPer4K Standard Size Units

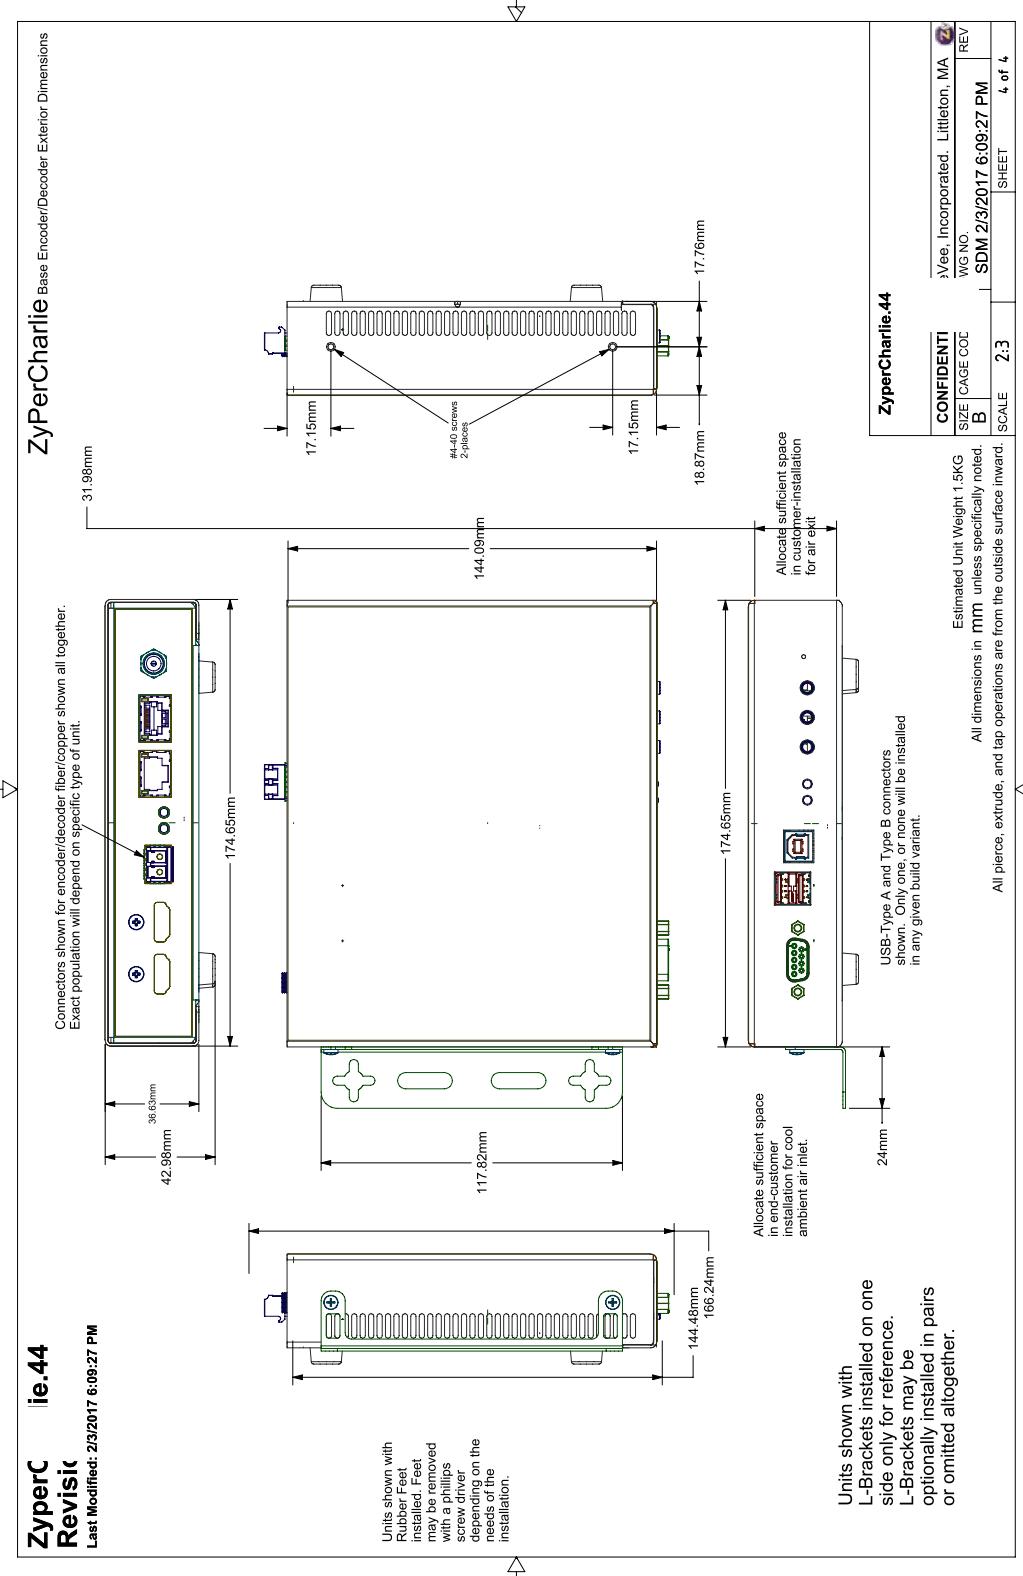


## ZyPer4K Extended Size Units

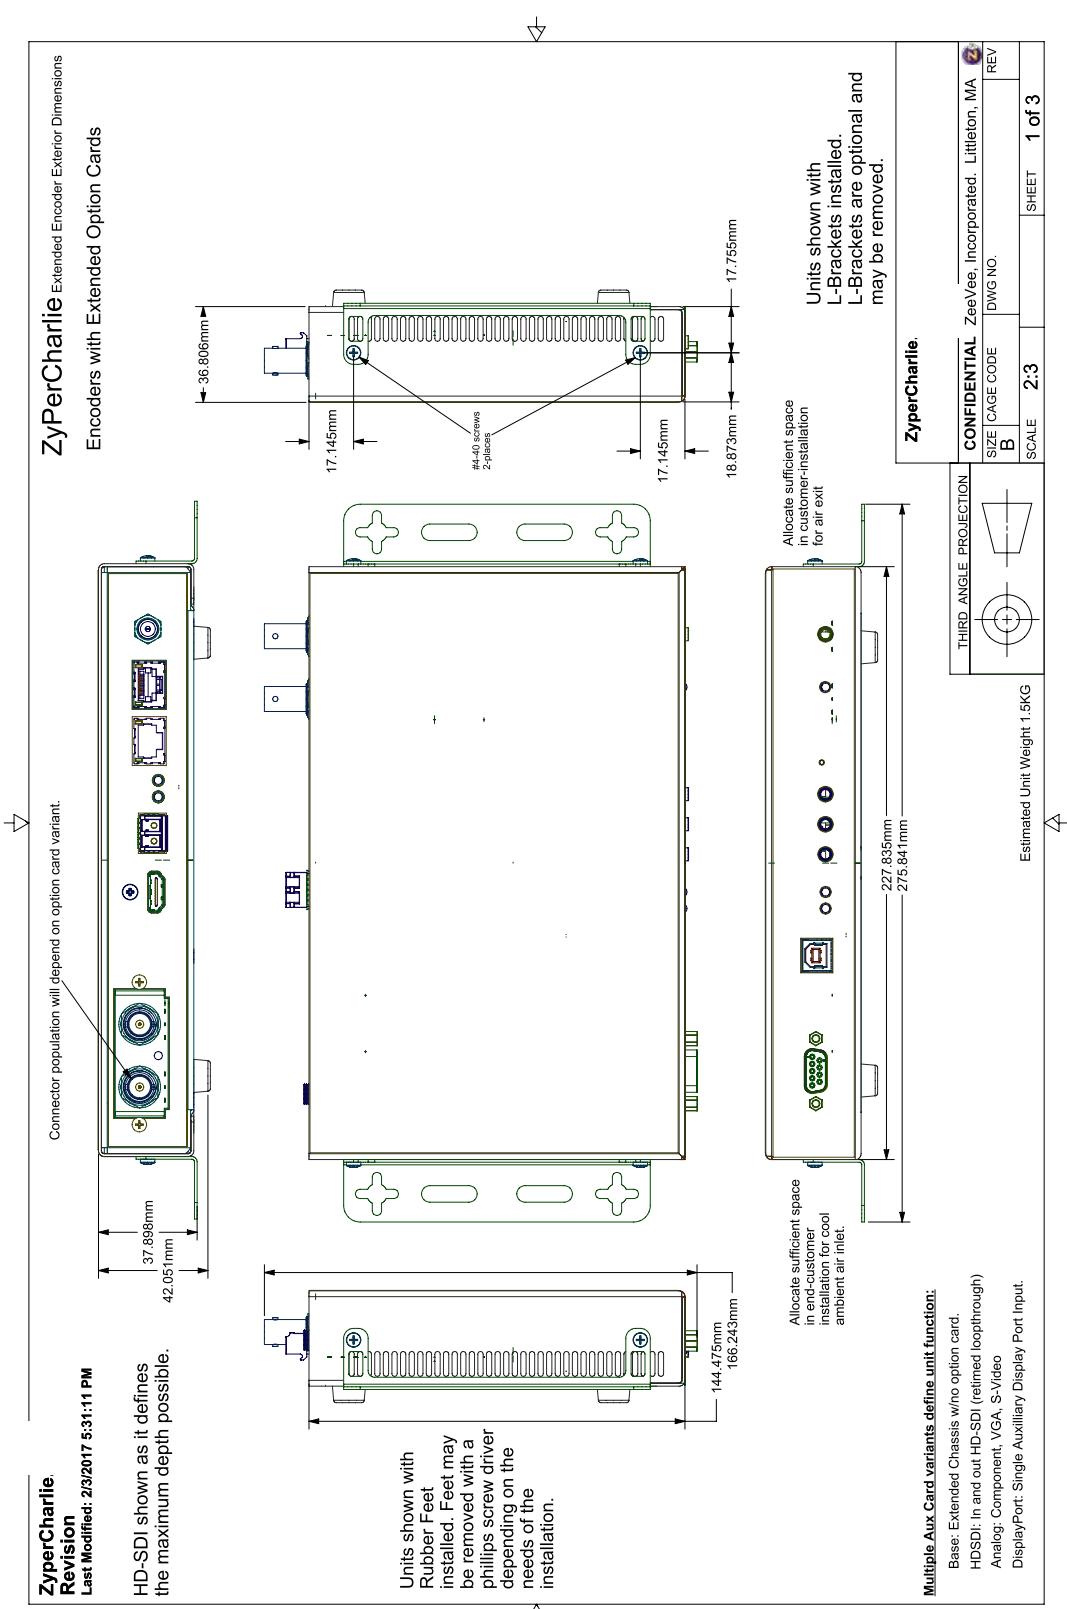


## ZyPer4K XS Units

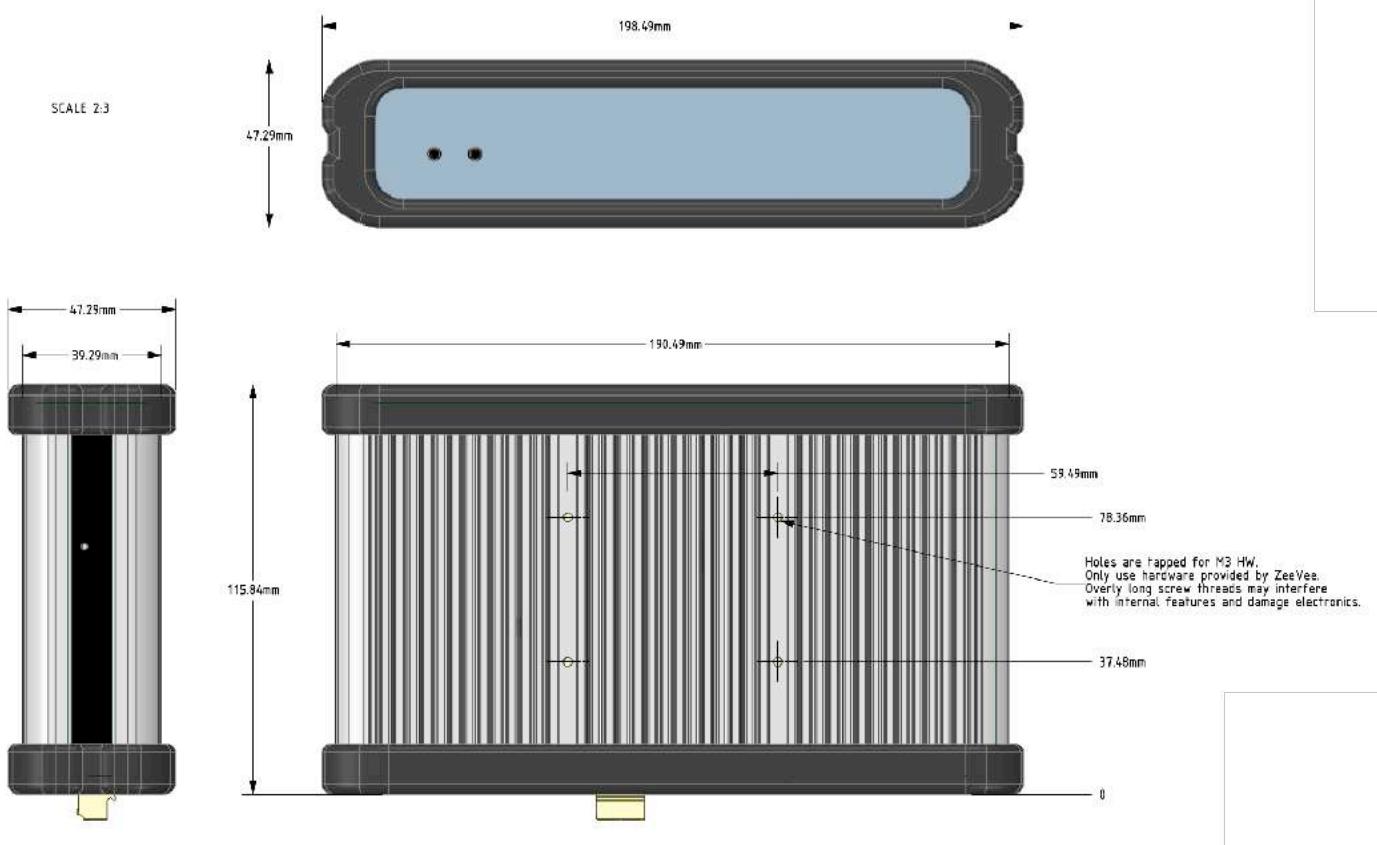


## ZyPer4K XSE Units

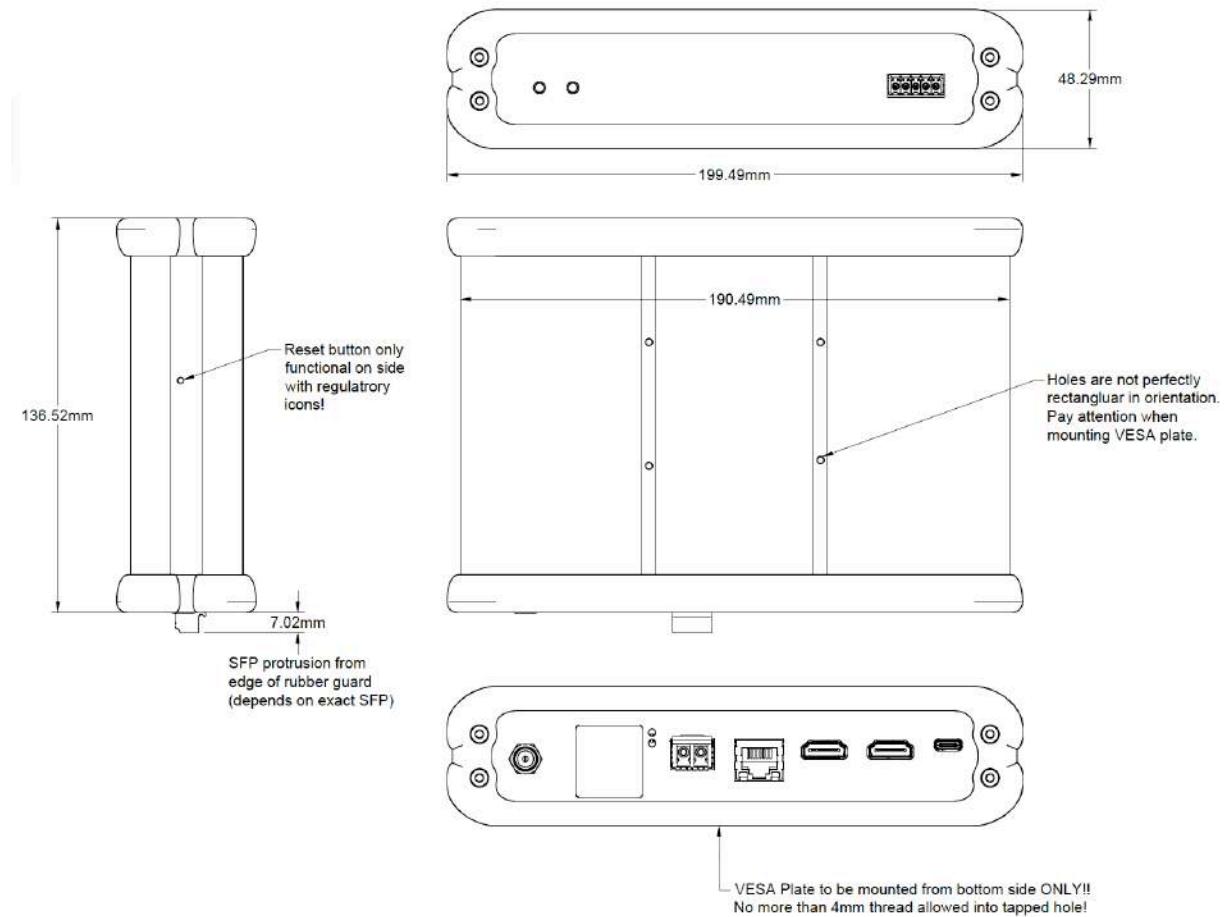


## ZyPer4K XR Units

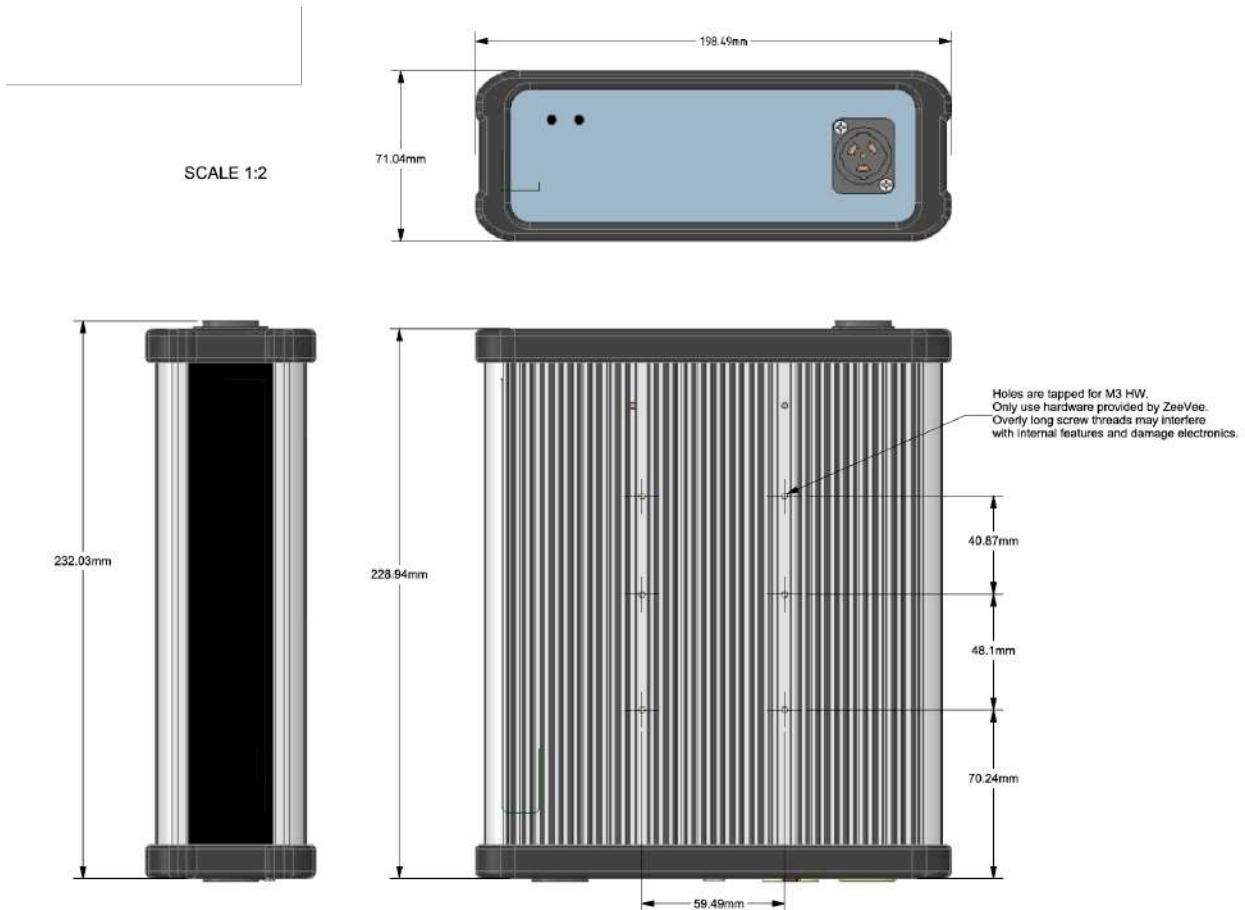

**US Wallplate** (Dimensions in millimeters)

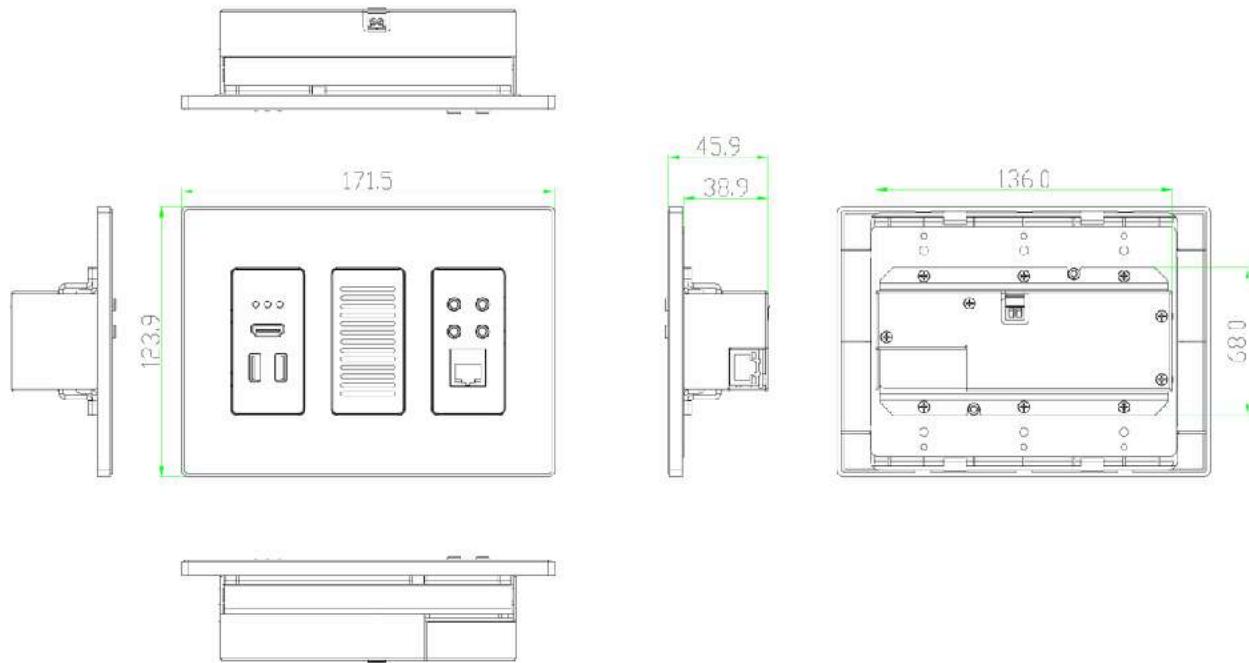

**EU Wallplate** (Dimensions in millimeters)

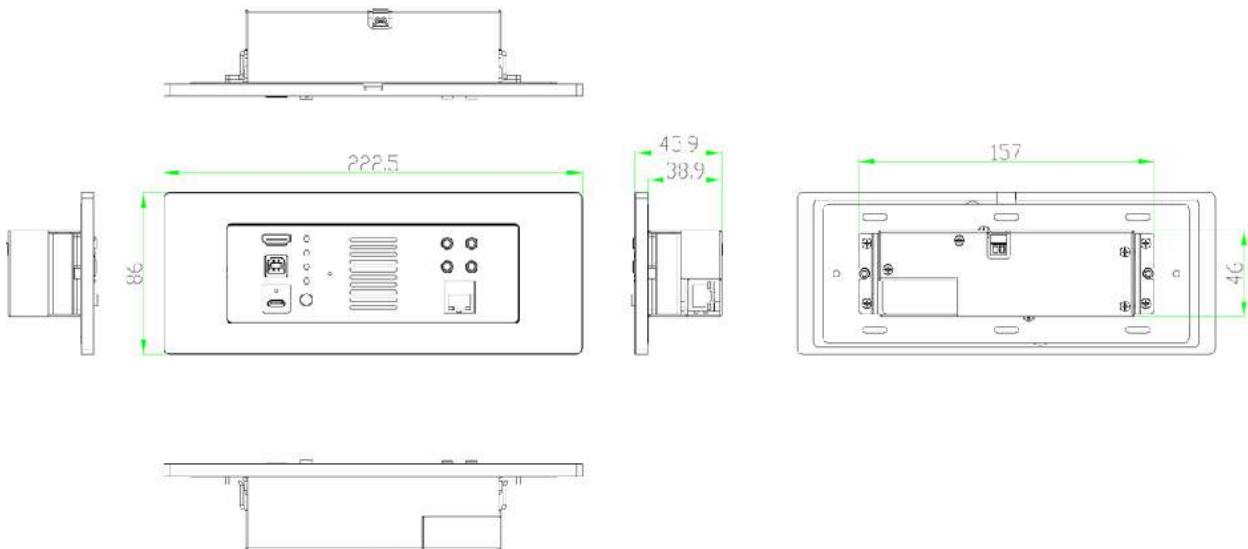

## Appendix 1

### Known Good USB-C Cables

The following USB-C cables have been tested with the ZyPer4K Wallplate units for simultaneous support of the following features: 3840 x 2160 video at 60Hz. Audio. USB Data for Webcam video transfer. 60W power charging. (External power supply to ZyPer4K required)

| Manufacturer / Part Number  | Length                                 | Link  |
|---|--|---|
| <b>Kramer</b> (Preferred solution)<br>C-U32/MFF-6<br>C-U32/MFF-10<br>C-U32/MFF-15<br>C-U32/FF-3<br>C-U32/FF-6 | 6 ft<br>10 ft<br>15 ft<br>3 ft<br>6 ft | <a href="https://www1.kramerav.com/gc/product/c-u32/mff">https://www1.kramerav.com/gc/product/c-u32/mff</a><br><a href="https://www1.kramerav.com/gc/product/c-u32/ff">https://www1.kramerav.com/gc/product/c-u32/ff</a>  |
| <b>BTX</b><br>BTX-USB4G3CMM1M   | 1.0m                                   | <a href="https://www.btx.com/usb4-g3x2-usb-c-m-m-40g-5a-240w-1m">https://www.btx.com/usb4-g3x2-usb-c-m-m-40g-5a-240w-1m</a>   |
| <b>BTX</b><br>BTX-USB4CMM2M   | 2.0m                                   | <a href="https://www.btx.com/usb-4-0-gen-2x2-20-gbps-240w-2-meters">https://www.btx.com/usb-4-0-gen-2x2-20-gbps-240w-2-meters</a>   |
| <b>Comprehensive</b><br>USB10G-CC-3PROBLK   | 3 ft                                   | <a href="https://comprehensiveco.com/products/pro-av-it-integrator-series-certified-ultra-flexible-10g-usb-c-to-c-male-4k-av-and-data-cable-3ft.html">https://comprehensiveco.com/products/pro-av-it-integrator-series-certified-ultra-flexible-10g-usb-c-to-c-male-4k-av-and-data-cable-3ft.html</a>   |
| <b>Comprehensive</b><br>USB10G-CC-6PROBLK   | 6 ft                                   | <a href="https://comprehensiveco.com/products/pro-av-it-integrator-series-certified-ultra-flexible-10g-usb-c-to-c-male-4k-av-and-data-cable-6ft.html">https://comprehensiveco.com/products/pro-av-it-integrator-series-certified-ultra-flexible-10g-usb-c-to-c-male-4k-av-and-data-cable-6ft.html</a>   |
| <b>Comprehensive</b><br>USB10G-CC-10PROBLKA   | 10 ft                                  | <a href="https://comprehensiveco.com/products/pro-av-it-integrator-series-certified-ultra-flexible-10g-usb-c-to-c-male-4k-av-and-data-cable-10ft.html">https://comprehensiveco.com/products/pro-av-it-integrator-series-certified-ultra-flexible-10g-usb-c-to-c-male-4k-av-and-data-cable-10ft.html</a>                                       |
| <b>Comprehensive</b><br>USB10G-CC-15PROBLKA   | 15 ft                                  | <a href="https://comprehensiveco.com/products/pro-av-it-integrator-series-certified-ultra-flexible-10g-usb-c-to-usb-c-male-4k-av-and-data-cable-15ft.html">https://comprehensiveco.com/products/pro-av-it-integrator-series-certified-ultra-flexible-10g-usb-c-to-usb-c-male-4k-av-and-data-cable-15ft.html</a>                               |
| <b>Cables to Go</b><br>C2G28885<br>C2G28886<br>C2G28887   | 0.5m<br>0.8m<br>2.0m                   | <a href="https://www.cablestogo.com/usb-and-pc/usb-c-cables-adapters-and-hubs/thunderbolt-cables/6ft-2m-thunderbolt-4-usb-c-active-cable-40gbps/p/cg-c2g28887?text=28887">https://www.cablestogo.com/usb-and-pc/usb-c-cables-adapters-and-hubs/thunderbolt-cables/6ft-2m-thunderbolt-4-usb-c-active-cable-40gbps/p/cg-c2g28887?text=28887</a> |
| <b>iVANKY</b><br>VBD10  | 1.0m                                   | <a href="https://www.amazon.com/Thunderbolt-Compatible-Tablets-Samsung-More-3-3ft/dp/B088627SLY?th=1">https://www.amazon.com/Thunderbolt-Compatible-Tablets-Samsung-More-3-3ft/dp/B088627SLY?th=1</a>   |
| <b>Plugable</b><br>TBT3-40G80CM   | 0.8m                                   | <a href="https://www.amazon.com/dp/B07R43LPCX?ref=ppx_yo2ov_dt_b_product_details&amp;th=1">https://www.amazon.com/dp/B07R43LPCX?ref=ppx_yo2ov_dt_b_product_details&amp;th=1</a>   |

**Note:** ZyPer4K-XSE Encoder can support up to 60W of charging with appropriate power input and proper USB-C cables.

## **Appendix 2**

---

### **USB-C Charging**

The ZyPer4K Wallplate Encoders with USB-C input are capable of charging devices over the attached USB-C cable if the external 24V power supply is connected to the ZyPer4K Encoder.

Charging level is controlled by the attached device such as a MacBook. This ensures that the ZyPer4K is not providing more power to the connected device than is called for.

#### **Examples:**

|                    |  |
|--------------------|--|
| MacBook (2016)     | Power supplied while “charging” = Approximately 25W            |
|                    | Power supplied while fully charged in sleep mode: Less than 1W |
| MacBook Pro (2018) | Power supplied while “charging” = Approximately 53W            |
|                    | Power supplied while fully charged in sleep mode: Less than 1W |

How seen by MacBook or MacBook Pro:

#### **AC Charger Information:**

Connected: Yes  
ID: 0x0000  
Wattage (W): 60  
Family: 0xe000400a  
Charging: Yes

**Important note:** The USB-C cable must be capable of carrying the required current. Low quality cables present a danger of possible cable fire. See Appendix 1 for recommended cables.

---

### **USB-C Cable Requirements**

1. Cable should be as short as possible
2. Must have USB-IF certification
3. Must be USB 3.2 Gen2 (2x1 or 2x2)
4. Current rating of 5A
5. Must support USB power delivery of 100W, 20V/5A
6. Video Data specs must support 4K data at 60Hz (4K@60Hz 4:4:4)
7. Must have built in E-Mark IC

**Kramer is not responsible for damage to any equipment caused by poor or incorrect USB-C cables.**

## **Appendix 3**

---

### **PoE Power and PoE Switches**

It is important to remember that the ZyPer4K is a device that requires a 10Gb network. Therefore any PoE injector must also support 10Gb data transfer.

Kramer recommends the following 10G PoE Injector for use with the ZyPer4K Wallplate and ZyPer4K-XS or ZyPer4K-XSE copper units.

*Proctet PT-PSE104GB-60-10*

To support PoE the following minimum Ethernet cable requirements must be met.

- Must be Cat6a 23AWG Solid Copper Twisted Pair.
- **Must be shielded**
- Maximum Length 328ft (100m)
- DC Loop Resistance per Pair  $< 25\Omega$
- DC Resistance Unbalance per Pair 3% or  $< 200m\Omega$

#### **Recommended Cables:**

Kramer has validated and can recommend Ethernet cables from Siemon Cable.

*North America Link:*

<https://ecatalog.siemon.com/en/Copper/Cable/Category-6A-Shielded-Cable-North-America>

*International Link:*

<https://ecatalog.siemon.com/en/Copper/Cable/Category-6A-Shielded-Cable-International>


#### **Important Note**


If using a Network Switch to provide PoE power to the ZyPer4K devices, it is important that the switch itself be protected against electrical surges that could be caused by something like a lightning strike. An appropriate surge protector should be placed between the Network Switch and AC power source.

## Why Shielded Ethernet Cable Is Required

Shielded cable must be used with PoE systems to provide the ZyPer4K-XS or XR endpoint a path to ground when another path is not available. Shielded cable options include: F/UTP, S/UTP, F/FTP, S/FTP, SF/UTP and SF/FTP.

### Unshielded Example:

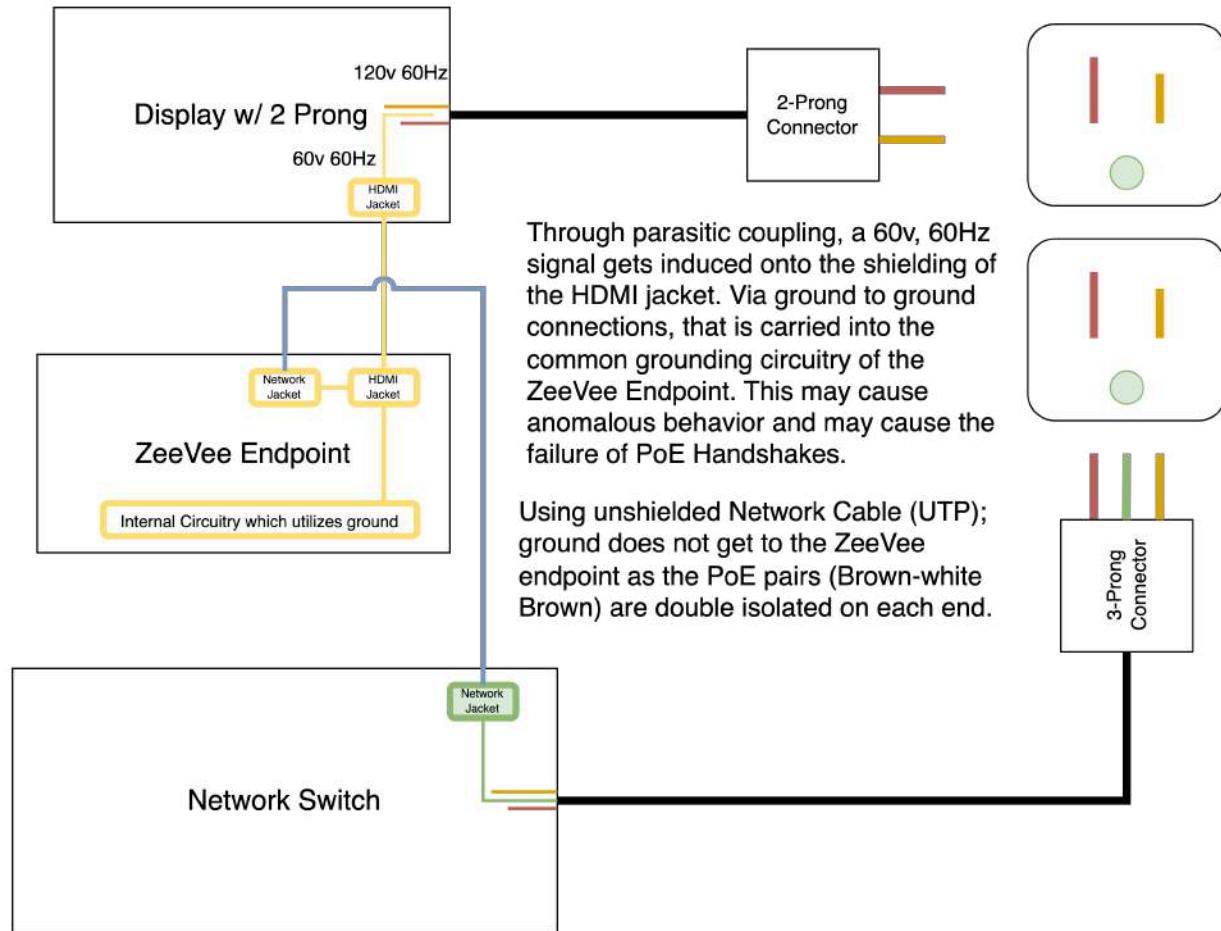

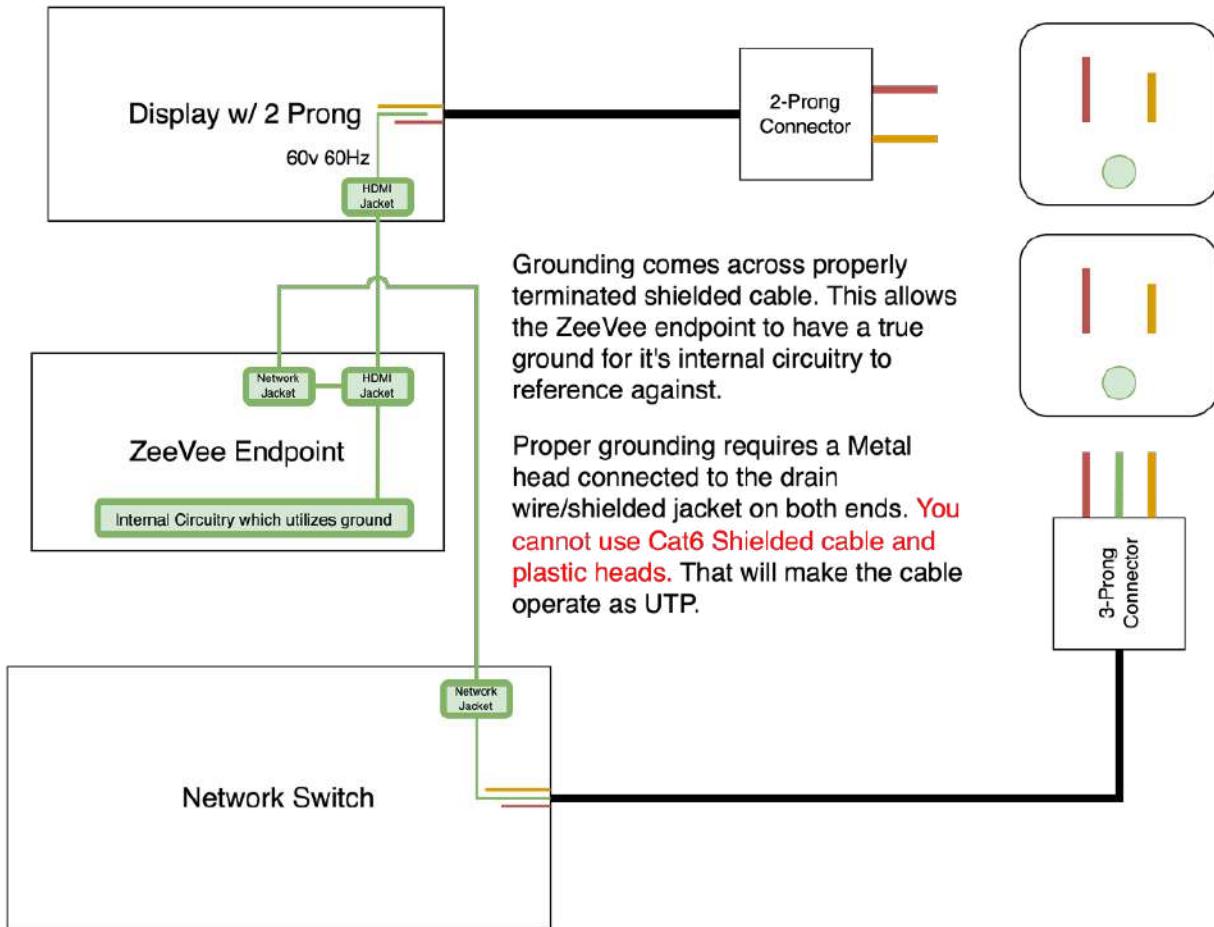**Shielded Example (F/UTP, S/UTP, F/FTP, S/FTP, SF/UTP or SF/FTP)**

## Appendix 4

### Accessories

| Part Number     | Description   |
|-----------------|---|
| Z4KSFP10G85-3M  | ZyPer4K, Fiber Optic Transceiver, SFP+ 10Gbps 850nm MMF 300m  |
| Z4KSFP10G31-10K | ZyPer4K, Fiber Optic Transceiver, SFP+ 10Gbps 1310nm SMF 10km   |
| Z4KRACKC1       | ZyPer4K Rack Mount Kit. Holds up to 8 ZyPer4K Encoders/Decoders in standard 5RU space. Includes rack assembly, 8 carrier units and 24 countersink screws. (Not compatible with ZyPer4K-XS or XSE units)   |
| Z4KRACKC2       | ZyPer4K Rack Mount Kit. Holds up to 8 ZyPer4K extended module Encoders/Decoders in standard 6RU space. Includes rack assembly, 8 carrier units and 24 countersink screws. (Not compatible with ZyPer4K-XS or XSE units)   |
| Z4KPWRCTR12     | ZyPer 12V Power Center for use with up to 8 ZyPer Encoder/Decoders (all models except XR). 1 RU. Includes rack ears, 8 3-foot locking 12V DC power cables, AC power cord.   |
| Z4KBCFP         | ZyPer4K Rack Mount Filler Plate Standard is used to cover unused slots in a ZyPer4K Rack Mount Kit. (Not compatible with ZyPer4K-XS units)  |
| Z4KCExtFP       | ZyPer4K Rack Mount Filler Plate Extended is used to cover unused slots in an ZyPer4K Rack Mount Kit Extended. (Not compatible with ZyPer4K-XS units)  |
| Z4KCCBRK        | ZyPer4K Rack Mount Filler Plate Center Carrier is used to cover partially unused slots that are populated with a standard ZyPer4K unit in an ZyPer4K Rack Mount Kit Extended. (Not compatible with ZyPer4K-XS units)  |
| Z4KXSBP         | ZyPer4K-XS Rack Mount Filler Plate Standard is used to cover unused slots in a ZyPer4K-XS or XSE Rack Mount Kit.  |
| Z4KRACKXS       | ZyPer4K-XS Rack Mount Kit. Holds up to 8 ZyPer4K-XS Encoders/Decoders in standard 6RU space. Includes rack assembly and 8 carrier units.  |
| Z4KRACKXSE      | ZyPer4K-XSE Rack Mount Kit. Holds up to 8 ZyPer4K-XSE Encoders/Decoders in standard 6RU space. Includes rack assembly and 8 carrier units.  |
| Z4KVESABRK      | ZyPer4K VESA Bracket is a custom wall/desk/display mount bracket for ZyPer4K. Supports standard VESA parameters for mounting directly to rear of a display. 100x100, 100x200 and 200x200 VESA hole mounts are supported. Not compatible with ZyPer4K-XR units or Extended Input Encoders. |
| Z4KCMNTBRKT     | The ZyPer4K Wing Mount Bracket is for ZyPer4K encoders/decoders. Enables mounting to floors, ceilings, desks, walls etc. Contains 2 brackets for single encoder/decoder. Not compatible with ZyPer4K-XS/XSE or XR units.  |
| ZWPPWR-24       | ZyPer4K WP Power Supply is a 24V power supply with 2-pin phoenix connector for use with ZyPer4K Wall plate encoders and decoders. (Not for use with any other ZyPer4K product)  |
| Z4K12VP         | Power supply for any ZyPer4K white box encoders and decoders. Not for use with wall plates or XS/XSE//XR units. 12VDC, 36W, 3.0A, Locking DC Jack, Power cable not included.  |

## ZyPer4K

| Part Number | Description  |
|-------------|--|
| Z4K12VP-XS  | Power supply for any ZyPer4K XS/XSE units. 12VDC, 4.2A Power cable not included. |

## Appendix 5

### ZyPer4K Part Numbers

| Part Number                            | Description   |
|--|---|
| Z4KENCF3                               | ZyPer4K HDMI 2.0 input Encoder, with IP streaming via 10Gbit/fiber. Supports analog audio, IR, RS-232. No USB. Includes power supply. Requires ZyPer4K Decoder. Cables not included.  |
| Z4KENCF3U                              | ZyPer4K HDMI 2.0 input Encoder, with IP streaming via 10Gbit/fiber. Supports USB, analog audio, IR, RS-232. Includes power supply. Requires ZyPer4K Decoder. Cables not included.   |
| Z4KDECF3<br><i>Discontinued</i>        | ZyPer4K HDMI 2.0 output Decoder, accepts IP streaming via 10Gbit/fiber. Supports analog audio, IR, RS-232. No USB. Includes power supply. Requires ZyPer4K Encoder. Cables not included.  |
| Z4KDECF3U<br><i>Discontinued</i>       | ZyPer4K HDMI 2.0 output Decoder, accepts IP streaming via 10Gbit/fiber. Supports USB, analog audio, IR, RS-232. Includes power supply. Requires ZyPer4K Encoder. Cables not included.   |
| Z4KDPDECF3<br><i>Discontinued</i>      | ZyPer4K HDMI 2.0 output and DisplayPort Decoder, accepts IP streaming via 10Gbit/fiber. Supports analog audio, IR, RS-232. No USB. Includes power supply. Requires ZyPer4K Encoder. Cables not included.  |
| Z4KDPDECF3U<br><i>Discontinued</i>     | ZyPer4K HDMI 2.0 output and DisplayPort Decoder, accepts IP streaming via 10Gbit/fiber. Supports USB, analog audio, IR, RS-232. Includes power supply. Requires ZyPer4K Encoder. Cables not included.   |
| Z4K12GSDIENCF3<br><i>Discontinued</i>  | ZyPer4K Extended Module, HDMI 2.0 and 12G SDI input Encoder, with IP streaming via 10Gbit/fiber. Supports analog audio, IR, RS-232. No USB. Includes power supply. Requires ZyPer4K Decoder. Cables not included. Available 09/01/2023.                     |
| Z4K12GSDIENCF3U<br><i>Discontinued</i> | ZyPer4K Extended Module, HDMI 2.0 and 12G SDI input Encoder, with IP streaming via 10Gbit/fiber. Supports USB, analog audio, IR, RS-232. Includes power supply. Requires ZyPer4K Decoder. Cables not included. Available 09/01/2023.                        |
| Z4KDPENCF3<br><i>Discontinued</i>      | ZyPer4K Extended Module, HDMI 2.0 and Display Port input Encoder, with IP streaming via 10Gbit/fiber. Supports analog audio, IR, RS-232. No USB. Includes power supply. Requires ZyPer4K Decoder. Cables not included.                                      |
| Z4KDPENCF3U<br><i>Discontinued</i>     | ZyPer4K Extended Module, HDMI 2.0 and Display Port input Encoder, with IP streaming via 10Gbit/fiber. Supports USB, analog audio, IR, RS-232. Includes power supply. Requires ZyPer4K Decoder. Cables not included.   |
| Z4KANLENCF3<br><i>Discontinued</i>     | ZyPer4K Extended Module, HDMI 2.0 and analog video (component, composite, VGA, S-video) input Encoder, with IP streaming via 10Gbit/fiber. Supports analog audio, IR, RS-232. No USB. Includes power supply. Requires ZyPer4K Decoder. Cables not included. |

## ZyPer4K

| Part Number  | Description  |
|--|--|
| Z4KANLENCF3U<br><span style="color: red;">Discontinued</span>  | ZyPer4K Extended Module, HDMI 2.0 and analog video (component, composite, VGA, S-video) input Encoder, with IP streaming via 10Gbit/fiber. Supports USB, analog audio, IR, RS-232. Includes power supply. Requires ZyPer4K Decoder. Cables not included.   |
| Z4KHDMIENCF3<br><span style="color: red;">Discontinued</span>  | ZyPer4K Extended Module, Dual HDMI 2.0 input Encoder with single HDMI loop-out, with IP streaming via 10Gbit/fiber. Supports analog audio, IR, RS-232. Includes power supply and wall mount brackets. Requires ZyPer4K Decoder. Cables not included.   |
| Z4KHDMIENCF3U<br><span style="color: red;">Discontinued</span> | ZyPer4K Extended Module, Dual HDMI 2.0 input Encoder with single HDMI loop-out, with IP streaming via 10Gbit/fiber. Supports USB, analog audio, IR, RS-232. Includes power supply and wall mount brackets. Requires ZyPer4K Decoder. Cables not included.  |
| Z4KDF3UA<br><span style="color: red;">Discontinued</span>      | ZyPer4K HDMI 2.0 output Decoder with Dante Transmitter, accepts IP streaming via 10Gbit/fiber. Supports USB, IR, RS-232. Includes power supply. Requires ZyPer4K Encoder. Cables not included.   |
| Z4KENCF3XS<br><span style="color: red;">Discontinued</span>    | ZyPer4K-XS HDMI 2.0 input Encoder, with IP streaming via 10Gbit/fiber. Supports HDMI and analog audio input. USB supported with between ZyPer4K XS/XR devices. Includes power supply. Compatible with any ZyPer4K Decoder. Cables not included.  |
| Z4KDECFSXR<br><span style="color: red;">Discontinued</span>    | ZyPer4K-XS HDMI 2.0 output Decoder, accepts IP streaming via 10Gbit/fiber. Supports HDMI and analog audio output. USB supported with between ZyPer4K XS/XR devices. Includes power supply. Compatible with any ZyPer4K Encoder. Cables not included.   |
| Z4KENCF3XS<br><span style="color: red;">Discontinued</span>    | ZyPer4K-XR HDMI 2.0 input Encoder with IP streaming via 10Gbit/Fiber. 850nm Multi-Mode Fiber Media Port. Supports HDMI and Analog audio Input. USB supported with between ZyPer4K XS/XR devices. Compatible with any ZyPer4K Decoder. AC power port, 1GB utility port and M10 Truss Clamp mounting hole. Enclosure and all connectors are rugged.        |
| Z4KENCFLXR<br><span style="color: red;">Discontinued</span>    | ZyPer4K-XR HDMI 2.0 input Encoder with IP streaming via 10Gbit/Fiber. 1300nm Single-Mode Fiber Media Port. Supports HDMI and Analog audio Input. USB supported with between ZyPer4K XS/XR devices. Compatible with any ZyPer4K Decoder. AC power port, 1GB utility port and M10 Truss Clamp mounting hole. Enclosure and all connectors are rugged.      |
| Z4KDECFSXR<br><span style="color: red;">Discontinued</span>    | ZyPer4K-XR HDMI 2.0 output Decoder, accepts IP streaming via 10Gbit/fiber. 850nm Multi-Mode Fiber Media Port. Supports HDMI and Analog audio Input. USB supported with between ZyPer4K XS/XR devices. Compatible with any ZyPer4K Encoder. AC power port, 1GB utility port and M10 Truss Clamp mounting hole. Enclosure and all connectors are rugged.   |
| Z4KDECFLXR<br><span style="color: red;">Discontinued</span>    | ZyPer4K-XR HDMI 2.0 output Decoder, accepts IP streaming via 10Gbit/fiber. 1300nm Single-Mode Fiber Media Port. Supports HDMI and Analog audio Input. USB supported with between ZyPer4K XS/XR devices. Compatible with any ZyPer4K Encoder. AC power port, 1GB utility port and M10 Truss Clamp mounting hole. Enclosure and all connectors are rugged. |

## ZyPer4K

| Part Number                            | Description  |
|--|--|
| Z4KENCC3                               | ZyPer4K HDMI 2.0 input Encoder, with IP streaming via 10Gbit/copper. Supports analog audio, IR, RS-232. No USB. Includes power supply. Requires ZyPer4K Decoder. Cables not included.  |
| Z4KENCC3U                              | ZyPer4K HDMI 2.0 input Encoder, with IP streaming via 10Gbit/copper. Supports USB, analog audio, IR, RS-232. Includes power supply. Requires ZyPer4K Decoder. Cables not included.   |
| Z4KDECC3<br><i>Discontinued</i>        | ZyPer4K HDMI 2.0 output Decoder, accepts IP streaming via 10Gbit/copper. Supports analog audio, IR, RS-232. No USB. Includes power supply. Requires ZyPer4K Encoder. Cables not included.  |
| Z4KDECC3U<br><i>Discontinued</i>       | ZyPer4K HDMI 2.0 output Decoder, accepts IP streaming via 10Gbit/copper. Supports USB, analog audio, IR, RS-232. Includes power supply. Requires ZyPer4K Encoder. Cables not included.   |
| Z4KDPDECC3<br><i>Discontinued</i>      | ZyPer4K HDMI 2.0 output and DisplayPort Decoder, accepts IP streaming via 10Gbit/copper. Supports analog audio, IR, RS-232. No USB. Includes power supply. Requires ZyPer4K Encoder. Cables not included.  |
| Z4KDPDECC3U<br><i>Discontinued</i>     | ZyPer4K HDMI 2.0 output and DisplayPort Decoder, accepts IP streaming via 10Gbit/copper. Supports USB, analog audio, IR, RS-232. Includes power supply. Requires ZyPer4K Encoder. Cables not included.   |
| Z4K12GSDIENCC3<br><i>Discontinued</i>  | ZyPer4K Extended Module, HDMI 2.0 and 12G SDI input Encoder, with IP streaming via 10Gbit/copper. Supports analog audio, IR, RS-232. No USB. Includes power supply. Requires ZyPer4K Decoder. Cables not included. Available 09/01/2023.                     |
| Z4K12GSDIENCC3U<br><i>Discontinued</i> | ZyPer4K Extended Module, HDMI 2.0 and 12G SDI input Encoder, with IP streaming via 10Gbit/copper. Supports USB, analog audio, IR, RS-232. Includes power supply. Requires ZyPer4K Decoder. Cables not included. Available 09/01/2023.                        |
| Z4KDPENCC3<br><i>Discontinued</i>      | ZyPer4K Extended Module, HDMI 2.0 and Display Port input Encoder, with IP streaming via 10Gbit/copper. Supports analog audio, IR, RS-232. No USB. Includes power supply. Requires ZyPer4K Decoder. Cables not included.                                      |
| Z4KDPENCC3U<br><i>Discontinued</i>     | ZyPer4K Extended Module, HDMI 2.0 and Display Port input Encoder, with IP streaming via 10Gbit/copper. Supports USB, analog audio, IR, RS-232. Includes power supply. Requires ZyPer4K Decoder. Cables not included.   |
| Z4KANLENCC3<br><i>Discontinued</i>     | ZyPer4K Extended module, HDMI 2.0 and analog video (component, composite, VGA, S-video) input Encoder, with IP streaming via 10Gbit/copper. Supports analog audio, IR, RS-232. No USB. Includes power supply. Requires ZyPer4K Decoder. Cables not included. |
| Z4KANLENCC3U<br><i>Discontinued</i>    | ZyPer4K Extended Module, HDMI 2.0 and analog video (component, composite, VGA, S-video) input Encoder, with IP streaming via 10Gbit/copper. Supports USB, analog audio, IR, RS-232. Includes power supply. Requires ZyPer4K Decoder. Cables not included.    |

## ZyPer4K

| Part Number                              | Description   |
|--|---|
| Z4KHDMIENCC3<br><i>Discontinued</i>      | ZyPer4K Extended Module, Dual HDMI 2.0 input Encoder with single HDMI loop-out, with IP streaming via 10Gbit/copper. Supports analog audio, IR, RS-232. Includes power supply. Requires ZyPer4K Decoder. Cables not included.   |
| Z4KHDMIENCC3U<br><i>Discontinued</i>     | ZyPer4K Extended Module, Dual HDMI 2.0 input Encoder with single HDMI loop-out, with IP streaming via 10Gbit/copper. Supports USB, analog audio, IR, RS-232. Includes power supply. Requires ZyPer4K Decoder. Cables not included.  |
| Z4KDC3UA<br><i>Discontinued</i>          | ZyPer4K HDMI 2.0 output Decoder with Dante Transmitter accepts IP streaming via 10Gbit/copper. Supports USB, IR, RS-232. Includes power supply. Requires ZyPer4K Encoder. Cables not included.  |
| Z4KENCC3XS<br><i>Discontinued</i>        | ZyPer4K-XS HDMI 2.0 input Encoder, with IP streaming via 10Gbit/copper. PoE. Supports HDMI and analog audio input. USB supported with mini USB-B port between ZyPer4K XS/XR devices. Includes power supply. Compatible with any ZyPer4K Decoder. Cables not included.   |
| Z4KDECC3XS<br><i>Discontinued</i>        | ZyPer4K-XS HDMI 2.0 output Decoder, accepts IP streaming via 10Gbit/copper. PoE. Supports HDMI and analog audio output. USB supported with between ZyPer4K XS/XR devices. Includes power supply. Compatible with any ZyPer4K Encoder. Cables not included   |
| Z4KENCC3XR<br><i>Discontinued</i>        | ZyPer4K-XR HDMI 2.0 input Encoder with IP streaming via 10Gbit/copper. PoE. Supports HDMI and Analog audio Input. USB supported with between ZyPer4K XS/XR devices. Compatible with any ZyPer4K Decoder. AC power port, 1GB utility port and M10 Truss Clamp mounting hole. Enclosure and all connectors are rugged.      |
| Z4KDECC3XR<br><i>Discontinued</i>        | ZyPer4K-XR HDMI 2.0 output Decoder, accepts IP streaming via 10Gbit/Copper. PoE. Supports HDMI and Analog audio Input. USB supported with between ZyPer4K XS/XR devices. Compatible with any ZyPer4K Encoder. AC power port, 1GB utility port and M10 Truss Clamp mounting hole. Enclosure and all connectors are rugged. |
| Z4KENCC3XS-WPUS<br><i>Discontinued</i>   | ZyPer4K-XS HDMI 2.0 and USB-C input Wallplate Encoder (US Form factor), with IP streaming via 10Gbit/copper. PoE. Supports analog audio, IR, RS-232. USB supported with between ZyPer4K XS/XR devices. Audio/Video compatible with any ZyPer4K Decoder. Power supply not included.  |
| Z4KDECC3XS-WPUS<br><i>Discontinued</i>   | ZyPer4K-XS HDMI 2.0 Wallplate Decoder (US Form factor), with IP streaming via 10Gbit/copper. PoE. Supports analog audio, IR, RS-232. USB supported between ZyPer4K XS/XR devices. Audio/Video compatible with any ZyPer4K Encoder. Power supply not included.   |
| Z4KDECC3XS-WPUS-I<br><i>Discontinued</i> | ZyPer4K-XS HDMI 2.0 Wallplate Decoder (US Form factor), with IP streaming via 10Gbit/copper. PoE. Supports analog audio, IR, RS-232. Icron USB supported between ZyPer4K Classic devices. Audio/Video compatible with any ZyPer4K Encoder. Power supply not included.   |

## ZyPer4K

| Part Number   | Description   |
|---|---|
| Z4KENCC3XS-WPUS-I   | ZyPer4K-XS HDMI 2.0 and USB-C input Wallplate Encoder (US Form factor), with IP streaming via 10Gbit/copper. PoE. Supports analog audio, IR, RS-232. Icron USB supported between ZyPer4K Classic devices. Audio/Video compatible with any ZyPer4K Decoder. Power supply not included.   |
| Z4KC2XS-E   | ZyPer4K-XSE Encoder, with IP streaming via 10Gbit/copper. PoE. Supports HDMI 2.0 and USB-C Video Inputs, HDMI Loop-out and balanced analog audio in/out (via 5-pin phoenix). USB HID support via USB-C port. Includes power supply. Audio/Video compatible with any ZyPer4K Decoder. Cables not included.   |
| Z4KC2XS-EAU   | ZyPer4K-XSE Encoder, with IP streaming via 10Gbit/copper with Dante support. PoE. Supports HDMI 2.0 and USB-C Video Inputs, HDMI Loop-out and balanced analog audio in/out (via 5-pin phoenix). Full USB 2.0 via Icron chipset on USB-C port. Includes power supply. Audio/Video compatible with any ZyPer4K Decoder. Cables not included.        |
| Z4KF2XS-E   | ZyPer4K-XSE Encoder, with IP streaming via 10Gbit/fiber. Supports HDMI 2.0 and USB-C Video Inputs, HDMI Loop-out and balanced analog audio in/out (via 5-pin phoenix). USB HID support via USB-C port. Includes power supply. Audio/Video compatible with any ZyPer4K Decoder. Cables not included.   |
| Z4KF2XS-EAU   | ZyPer4K-XSE Encoder, with IP streaming via 10Gbit/fiber with Dante support. Supports HDMI 2.0 and USB-C Video Inputs, HDMI Loop-out and balanced analog audio in/out (via 5-pin phoenix). Full USB 2.0 via Icron chipset on USB-C port. Includes power supply. Audio/Video compatible with any ZyPer4K Decoder. Cables not included.              |
| Z4KCXS-D<br><span style="color: red;">Discontinued</span>   | ZyPer4K-XSE Decoder, accepts IP streaming via 10Gbit/copper. PoE. Supports HDMI 2.0 and balanced analog audio output (via 5-pin phoenix). USB HID support via USB-A port. RS232 via 3-pin phoenix connector. Includes power supply. Audio/Video compatible with any ZyPer4K Encoder. Cables not included  |
| Z4KCXS-DAU<br><span style="color: red;">Discontinued</span> | ZyPer4K-XSE Decoder, accepts IP streaming via 10Gbit/copper with Dante support. PoE. Supports HDMI 2.0 and balanced analog audio output (via 5-pin phoenix). Full USB 2.0 support via Icron chipset on USB-A port. RS232 via 3-pin phoenix connector. Includes power supply. Audio/Video compatible with any ZyPer4K Encoder. Cables not included |
| Z4KFXS-D<br><span style="color: red;">Discontinued</span>   | ZyPer4K-XSE Decoder, accepts IP streaming via 10Gbit/fiber. Supports HDMI 2.0 and balanced analog audio output (via 5-pin phoenix). USB HID support via USB-A port. RS232 via 3-pin phoenix connector. Includes power supply. Audio/Video compatible with any ZyPer4K Encoder. Cables not included  |
| Z4KFXS-DAU<br><span style="color: red;">Discontinued</span> | ZyPer4K-XSE Decoder, accepts IP streaming via 10Gbit/fiber with Dante support. Supports HDMI 2.0 and balanced analog audio output (via 5-pin phoenix). Full USB 2.0 support via Icron chipset on USB-A port. RS232 via 3-pin phoenix connector. Includes power supply. Audio/Video compatible with any ZyPer4K Encoder. Cables not included       |

## ZyPer4K

| Part Number | Description   |
|-------------|---|
| Z4KC2XS-D   | ZyPer4K-XSE Decoder, accepts IP streaming via 10Gbit/copper. PoE. Supports HDMI 2.0 and balanced analog audio output (via 5-pin phoenix). USB HID support via Dual USB-A ports. RS232 via 3-pin phoenix connector. Includes power supply. Audio/Video compatible with any ZyPer4K Encoder. Cables not included  |
| Z4KC2XS-DAU | ZyPer4K-XSE Decoder, accepts IP streaming via 10Gbit/copper with Dante support. PoE. Supports HDMI 2.0 and balanced analog audio output (via 5-pin phoenix). Full USB 2.0 support via Icron chipset on Dual USB-A ports. RS232 via 3-pin phoenix connector. Includes power supply. Audio/Video compatible with any ZyPer4K Encoder. Cables not included |
| Z4KF2XS-D   | ZyPer4K-XSE Decoder, accepts IP streaming via 10Gbit/fiber. Supports HDMI 2.0 and balanced analog audio output (via 5-pin phoenix). USB HID support via Dual USB-A ports. RS232 via 3-pin phoenix connector. Includes power supply. Audio/Video compatible with any ZyPer4K Encoder. Cables not included  |
| Z4KF2XS-DAU | ZyPer4K-XSE Decoder, accepts IP streaming via 10Gbit/fiber with Dante support. Supports HDMI 2.0 and balanced analog audio output (via 5-pin phoenix). Full USB 2.0 support via Icron chipset on Dual USB-A ports. RS232 via 3-pin phoenix connector. Includes power supply. Audio/Video compatible with any ZyPer4K Encoder. Cables not included       |

## Disclaimers

Kramer has striven to ensure that this document is accurate and represents the described products fully. Although, ZeeVee assumes no responsibility for errors found, should any be found, please contact [zv\\_support@kramerav.com](mailto:zv_support@kramerav.com) and corrections will be issued as appropriate.

Kramer hardware designs are property of Kramer.

Components, sub-assemblies, and methods utilized in the designs are free of any encumbrances or appropriate licenses and rights have been obtained by ZeeVee for the use in the described products in the intended manner.

Kramer software is the sole property of Kramer except within the restrictions and guidelines of any open-source or public-license component utilized. Kramer represents that normal usage of the product in a typical customer installation is fully within the granted rights and privileges of any licensed component. Visit [www.zeevee.com](http://www.zeevee.com) or [www.kramerav.com](http://www.kramerav.com) for further details.

The specifications of the described products may change at any time without notice.

Kramer forbids unauthorized disassembly, reverse-engineering, duplication, or any other attempt to recreate all or portions of the hardware or software outside of any use explicitly authorized in writing by Kramer.

### Trademarks

All trademarks are the property of their respective owners.

### Copyright

This document is copyrighted with all rights reserved. This document or any portion contained may not be reproduced or copied by any means - graphically, mechanically, or electronically - without express written authorization of ZeeVee.

**© 2017 ZeeVee, Inc. All rights reserved.**

**© 2024 Kramer, Inc. All rights reserved.**



### TAA Compliance

All ZyPer4K units are TAA Compliant with the exception of the Wallplate units.