



Structured Cable Products™

Quality Installations Deserve Quality Products

www.scpcat5e.com
 sales@scpcat5e.com
 Direct: 954-327-5770
 Toll Free: 866-470-5742

SCP PART#: SP-1.5/2-LSZH-BK

UPC: 817777015300

Description:


COMMERCIAL SPEAKER CABLE - Cca RATED - 2 COND/1.5mm²
 (16awg) 30x0.25mm (STANDARD CLASS 5) OXYGEN FREE COPPER,
 EN50575:2014 Cca-s1,d1,a1 LOW SMOKE ZERO HALOGEN
 BLACK JKT- 305M/1000FT SPOOL

Regulatory:

EN50575:2014 REACTION TO FIRE CLASS Cca-s1,d1,a1

Application:

Commercial Speaker Cable

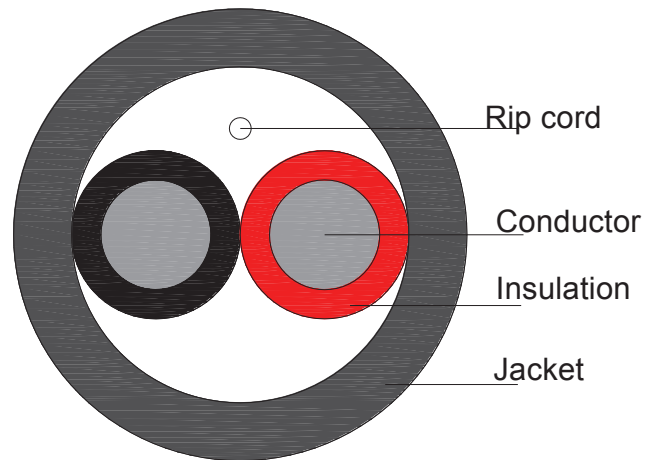

Construction Characteristics:

| | | |
|------------|---------------|---------------------------------|
| Conductor | Material | Bare Copper |
| | Size | 16AWG X 2C(1.5mm ²) |
| | Construction | 30*0.25±0.008mm |
| Insulation | Material | LSZH |
| | Diameter | 2.20±0.05mm |
| | Colors | Black, Red, |
| Jacket | Material | LSZH |
| | AVG.Thickness | 0.70mm |
| | Diameter | 5.8±0.2mm |
| | Rip Cord | Stranded rip cord |
| | Color | Black |

Electrical & Physical Characteristics:

| | | |
|----------------------------------|-------------------------|-----------------------------|
| Rated Voltage | | 300Volts |
| Test Voltage | | 800V/min |
| Minimum Bend Radius | | 8×O.D. |
| Conductor Resistance | | ≤13.72Ω/km |
| Minimum Installation Temperature | | -20°C |
| Insulation | Before | Tensile Strength(Mpa) ≥10.0 |
| | | Elongation ≥125 |
| | Aging Period 100°C×168h | |
| | After | Tensile Strength(Mpa) ≥8.0 |
| | Elongation ≥100 | |

Marking:

STRUCTURED CABLE PRODUCTS -- SP-1.5/2-LSZH -- 2C/1.50mm² (16AWG) 30x0.25mm STRAND OXYGEN FREE COPPER LSZH
 JKT EN50575:2014 CE Cca-s1,d1,a1 RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M

Packaging:

| | | | |
|--------------------|----------------------|------------------|---------------------|
| Approx.Weight | Approx.Dimension(mm) | Package | Packages per pallet |
| 16.7kgs/36.8172lbs | 370x370x175 | 305m/1000ft REEL | 45 |