

# HuddleCamHD MiniTrack 4K Pro

<http://huddlecamed.com>


HuddleCam HD MiniTrack 4K is an Ultra HD camera with AI Auto-Frame and Auto-Tracking technology.

## Key Features:

- Ultra HD Wide-Angle Field of View
- USB 3.0
- Built-in Microphone Array
- AI Auto Framing
- AI AutoTracking

## What's in the Box

- Camera
- USB 3.0 A-C Cable
- IR Remote
- AAA Batteries
- Quick Start Guide

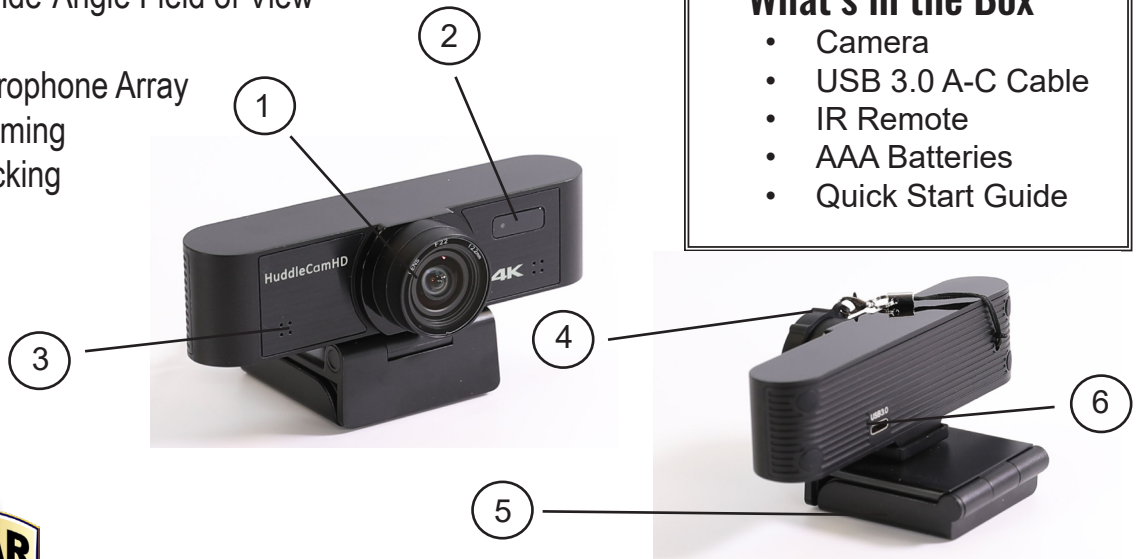

- 1. Lens**  
108 ° Fied of view
- 2. LED Indicator**  
Illuminated during use

- 3. Microphone Array**  
Beamforming mic array
- 4. Lens Cover**  
Lens Cap

- 5. Mounting Base**  
Mount to Monitor or 1/4-20
- 6. USB 3.0 Port**  
Connect to PC USB 3.0 Port



### Image Sensor and Lens

|                           |  |
|---------------------------|--|
| Video Sensor              | 1/2.8" UHD CMOS 8.29 Mega Pixel                          |
|                           | 3840x2160, 2560x1440,                                    |
| Resolution                | 1920x1080, 1280x720, 1024x576,<br>800x600, 640x480, etc. |
| Frame Rate <sup>[1]</sup> | 50Hz = 1 ~ 50, 60Hz = 1 ~ 60                             |
| Zoom <sup>[2]</sup>       | 8X Digital Zoom  |
| Min Illumination          | 0.5 Lux @ F1.8, AGC On                                   |
| Field of View             | 108° H x 68° V   |

### Electronic Index

|                     |                |
|---------------------|----------------|
| Input Voltage       | 5V (USB Power) |
| Current Consumption | 600mA          |
| Power Consumption   | 3W             |
| Working Environment | Indoor         |

### Physical Specifications

|                  |                                 |
|------------------|---------------------------------|
| Material         | Plastic                         |
| Dimensions (in)  | 4.65 W x 2.74 D x 2.13 H        |
| Dimensions (mm.) | 118 W x 69.5 D x 54.1 H         |
| Weight           | 0.35 lbs   0.16kg               |
| Operating Temp.  | 32° F ~ 104° F (-10° C ~ 40° C) |
| Storage Temp     | -40° F ~ 140° F (-40° C ~ 60°C) |

### USB Specifications

|                      |                                     |
|----------------------|-------------------------------------|
| Compression          | MJPEG / YUY2 <sup>[3]</sup> / H.264 |
| EPTZ Control Methods | IR Remote, UVC 1.1                  |
| Connection           | USB 3.0 (Type C)                    |

### Other

|              |                       |
|--------------|-----------------------|
| Mfg Warranty | 5 Years Parts & Labor |
|--------------|-----------------------|

[1] 3840x2160 (4K) & 2560x1440 (2K) are limited to 30 FPS

[2] 3840x2160 (4K) & 2560x1440 (2K) are limited to 3x digital zoom

[3] YUY2 compression is limited to 30 FPS