


HIGHLIGHTS


- Enables ground stacking VTX A6 arrays
- Allows attaching VTX A6 cabinets to subwoofers
- Universal M20 threaded pole mount
- Angle range: -15 degrees and +5 degrees
- Compatible with VTX PM pole mount adapter
- Support for up to (8) VTX A6

DESCRIPTION

The VTX A6 Base Plate is a universal adapter frame that enables VTX A6 arrays to be ground stacked on top of compatible subwoofers or support structures such as stages, scaffolding, or carts. Using the included M20 screw, the VTX A6 BP connects to any supported subwoofer equipped with a standard M20 pole mount adapter, such as the VTX B15, B18, or the B28. The base plate attaches directly to the bottom of an A6 array, and the rear angle selection plate allows for positions ranging from -15 to +5 degrees. When not used with subwoofers, M10 through-holes at the four corners can be used to permanently attach an A6 array to other support structures. The base plate is compatible with the VTX Pole Mount (JBL-P3312MX) accessory to allow up to three A6 speakers to be set on standard 35 mm poles or speaker stands. For more information about the base plate and use cases refer to the **VTX A6 Rigging Manual**.

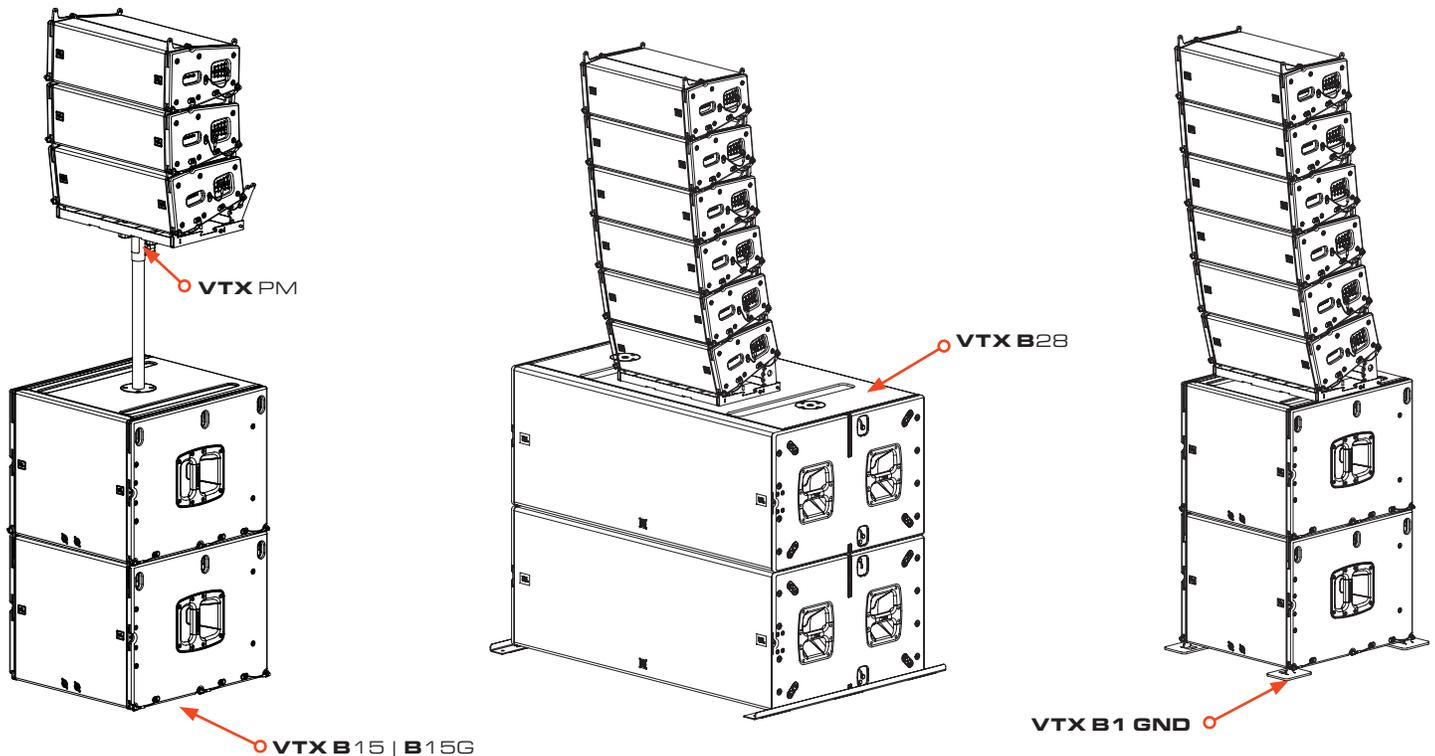

DIMENSIONS

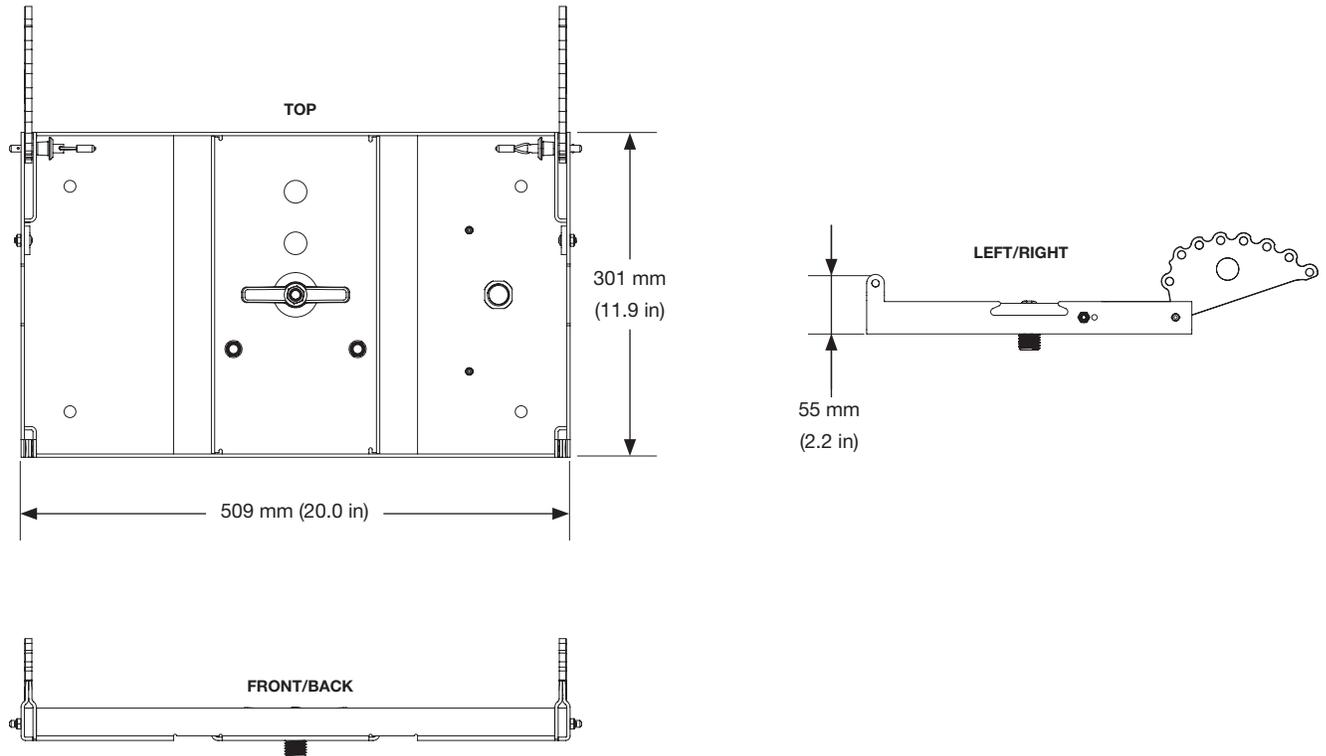

TECHNICAL SPECIFICATIONS

PHYSICAL

Construction : High-grade steel with anti-corrosion coating

Finish : Black powder coat

Mechanical Limits¹

Safe Limit : (2) VTX A6

Maximum Limit : (8) VTX A6

Dimensions (H x W x D)² : 55 mm x 509 mm x 301 mm
(2.2 in x 20.0 in x 11.9 in)

Net Weight : 5.3 kg (11.6 lbs)

Shipping Weight : 6.3 kg (13.9 lbs)

ORDERING INFORMATION

SKU : JBL-P3255MX | VTX A6 BP

Included : (1) Base Plate | (2) Angle Plates | (1) M20 Knob # 5118612

Footnotes:

1: Always check mechanical safety with JBL Line Array Calculator 3 software before use. For more information on Safe and Maximum Limits, refer to the **VTX A6 Rigging Manual**.

2: Refer to the 2D and 3D Customer Drawings for more detailed dimensions.

JBL continually engages in research related to product improvement. Some materials, production methods and design refinements are introduced into existing products without notice as a routine expression of that philosophy. For this reason, any current JBL product may differ in some respect from its published description, but will always equal or exceed the original design specifications unless otherwise stated.